



**CONSULTANCY SERVICES TO VERIFY AND RECORD ASSETS
UNDER THE UGIFT PROGRAMME**

REF: MOFPED/UGIFT/CONS/25/26/00015

ASSET VERIFICATION REPORT

SUBMITTED BY:

SK&CO Seijaaka, Kaawaase & Co.
AUDIT • ADVISORY • FORENSICS Certified Public Accountants

Plot 31, Bukoto Street
P.O Box 7657, Kampala, Uganda
+256 (0) 39 2000216/0772525235
email: cpa@cpa.ug
www.cpa.com

September 2026

Contents

Executive summary	8
1 Introduction and background	13
1.1 Introduction	13
1.2 Background to the verification	13
1.3 Justification	13
1.4 Objectives of the assignment	13
1.5 Scope of work	13
2 Approach and methodology	14
2.1 Preparation	14
2.2 What teams checked	14
2.3 Fieldwork and itinerary	14
2.4 Facilities and institutions expected	14
2.5 Quality assurance	15
2.6 Bringing the findings together	15
2.7 Asset categories, condition, use and identification	16
2.8 Valuation basis	16
3 Project context	17
3.1 Programme background and design	17
3.2 Programme components	17
3.3 Programme objectives	17
3.4 Delivery position at programme closure	17
4 Findings	18
4.1 Availability, condition, identification and value	18
4.2 Ministries, departments and agencies	28
4.3 Health centres	32
4.4 Seed secondary schools	36
4.5 Blood banks	40
4.6 Facilities verified, completion and inconsistencies	44
4.7 UgIFT support to service delivery	52
4.8 Summary of findings	57
5 Recommendations	58
5.1 Maintenance and repairs	58
5.2 Restore safe operation	60
5.3 Complete works and bring stored assets into use	60
5.4 Equip staff to operate and maintain assets	61
5.5 Strengthen identification and custody	61
5.6 Resolve programme-list inconsistencies	62
5.7 Plan for continued service delivery	62
5.8 Priorities for follow-up	63
5.9 Facility findings and recommended actions	64
6 Conclusion	68
Appendices	69
Appendix A Summary count schedule	69
Appendix B Asset totals by category and register class	70
Appendix C Condition and use schedules	71
Appendix D Recorded value and net book value schedules	72
Appendix E Utilisation and identification schedules	74
Appendix F Programme-list reconciliation	75
Appendix G Asset information for institutional handover	81
Appendix H Evidence supporting the findings	81
Appendix I Photographic record of verified assets	81

List of tables

Table 1: Key statistics of the UgIFT asset verification.....	8
Table 2: Local government field itinerary.....	14
Table 3: Facilities on the programme list	15
Table 4: Programme outputs at closure	17
Table 5: Availability of verified assets by institution group.....	18
Table 6: Condition of verified assets by institution	19
Table 7: Identification of verified assets by institution group	25
Table 8: Recorded value and net book value by institution group.....	28
Table 9: Availability of assets: Ministries, departments and agencies	28
Table 10: Condition of assets: Ministries, departments and agencies	29
Table 11: Identification of assets: Ministries, departments and agencies	30
Table 12: Recorded value and net book value: Ministries, departments and agencies	31
Table 13: Availability of assets: Health centres	33
Table 14: Condition of assets: Health centres	33
Table 15: Identification of assets: Health centres	34
Table 16: Recorded value and net book value: Health centres	35
Table 17: Health centre buildings: residential and non-residential.....	35
Table 18: Availability of assets: Seed secondary schools	36
Table 19: Condition of assets: Seed secondary schools	37
Table 20: Identification of assets: Seed secondary schools.....	38
Table 21: Recorded value and net book value: Seed secondary schools	38
Table 22: School buildings and furniture: composition	39
Table 23: Availability of assets: Blood banks.....	40
Table 24: Condition of assets: Blood banks.....	40
Table 25: Identification of assets: Blood banks	41
Table 26: Recorded value and net book value: Blood banks	42
Table 27: Programme-list facilities verified, completed and providing services	45
Table 28: Facilities requiring completion or preparation for use	46
Table 29: Inconsistencies between the programme list and the facilities found	49
Table 30: Expected facilities and the outcomes established during verification.....	50
Table 31: Confirmed additional beneficiaries outside the programme list	51
Table 32: User gaps and challenges raised by facilities that described service delivery	55
Table 33: Priority actions to protect assets and restore service	63
Table 34: Facility findings and recommended actions	65
Table 35: Summary count schedule by institution group.....	69
Table 36: Assets by report category and institution group	70
Table 37: Assets by register class and institution group	71
Table 38: Condition of assets by report category.....	71
Table 39: Stated reasons for assets not in use by institution group.....	72
Table 40: Recorded value and net book value by institution group.....	72
Table 41: Recorded value and net book value by ministry and blood bank.....	73
Table 42: Recorded value and net book value by report category.....	73
Table 43: Engraving of verified assets by institution group.....	74
Table 44: Engraving of verified assets by report category	74
Table 45: Facilities with assets not in use, in storage or broken down by institution group.....	75
Table 46: Programme-list entries with an inconsistency.....	75
Table 47: Ground-return identities outside the programme list.....	77
Table 48: Verified facilities with works outstanding or not yet providing services	78
Table 49: Asset information prepared for handover	81

List of figures

Figure 1: Seed schools and health centres hold most verified assets	18
Figure 2: Most assets were in use; broken assets were the smaller share.....	20
Figure 3: Share of assets in good condition by institution	21
Figure 4: Delivery bed with a torn mattress cover at a health centre, Busia District (Bukedi).....	21
Figure 5: Damaged drip stand at a health centre, Moroto District (Karamoja).....	21
Figure 6: Broken desk frame at a seed secondary school, Namisindwa District (Bugisu).....	21
Figure 7: Stacked desks, chairs and stools, some recorded as broken and none engraved, at Napak Seed Secondary School, Napak District (Karamoja)	21
Figure 8: Cracked health centre block above collapsed ground, Bulambuli District (Bugisu)	21
Figure 9: Water tank on a cracked base at a seed secondary school, Kibuku District (Bukedi).....	21
Figure 10: Stained and peeling ceiling at a health centre, Sironko District (Bugisu)	22
Figure 11: Flood-affected older health facility at Butiaba, Buliisa District (Bunyoro)	22
Figure 12: Desktop computers, a printer and UPS units still boxed in the store at Lungulu Seed Secondary School, Nwoya District (Acholi), awaiting a power connection for installation.....	22
Figure 13: Largely empty ICT and library block with a few chairs and items kept in one corner at Iriiri Seed Secondary School, Napak District (Karamoja), not yet in use while the school remained with the contractor	22
Figure 14: HP computer sets stacked in store with cables still bundled and not installed at Bumufuni Seed Secondary School, Bulambuli District (Bugisu)	22
Figure 15: Laboratory stools and desks stored and not yet in use at Butungama Seed Secondary School, Ntoroko District (Tooro), where the school buildings were still under construction	22
Figure 16: Boxed projector, air conditioner and other equipment in store at King Solomon Seed Secondary School, Kagadi District (Bunyoro), kept boxed because the school was still under construction.....	23
Figure 17: Chairs, desks and laboratory stools stacked in a hall at King Solomon Seed Secondary School, Kagadi District (Bunyoro), where most assets remained in storage because the school was still under construction.....	23
Figure 18: Clinical equipment kept in store among cartons and not in use at Kihuukya Health Centre III, Hoima City (Bunyoro)	23
Figure 19: Boxed handheld pulse oximeters at Kibiri Health Centre III, Makindye-Ssabagabo Municipal Council (Buganda), where equipment was still being arranged after the facility opened on 31 August 2026.....	23
Figure 20: Hospital beds and screens stacked in storage at a health centre, Kagadi District (Bunyoro).....	23
Figure 21: Pedal suction unit marked MAJANJI H/C III still in its packing, recorded as not in use for lack of technical knowledge, Majanji Health Centre III, Busia District (Bukedi)	23
Figure 22: Breakdowns and storage were the main reasons assets were not in use	24
Figure 23: Power and user skills were the main reasons equipment stood idle	24
Figure 24: Most verified movable assets were not engraved	25
Figure 25: Engraving reading GOU/MOH-UGIFT PROJECT FY/2023/2024 on a desk at Namwaya Health Centre III, Tororo District (Bukedi)	25
Figure 26: Engraving reading APSSS MOES/UGIFT/KABE/SPLRS/2023-24/001 on a desk at Aperikira Seed Secondary School, Kaberamaido District (Teso).....	25
Figure 27: Chair engraved UGIFT/ BUDDE SEED S.S M-PHALL CHAIR with a serial number at Budde Seed Secondary School, Butambala District (Buganda).....	26
Figure 28: Chairs engraved BSS UGIFT with serial numbers at Budde Seed Secondary School, Butambala District (Buganda).....	26
Figure 29: Engraving reading GOU/MOH-UGIFT PROJECT F/Y 2023/2024 on a bench at Bududa Health Centre III, Bududa District (Bugisu)	26
Figure 30: Wheelchair backrest marked GOU/MOH UGIFT-PROJECT. FY2023/2024 at Kalemungole Health Centre III, Moroto District (Karamoja).....	26
Figure 31: Refrigerator marked GOU/MOH-UGIFT PROJECT FY2024-2025/01 at Kalemungole Health Centre III, Moroto District (Karamoja).....	26
Figure 32: Engraving reading GOU/MOH-UGIFT PROJECT FY2023-2024/01 on a weighing scale at Kalemungole Health Centre III, Moroto District (Karamoja)	26
Figure 33: Engraving reading GOU/MOH-UGIFT PROJECT FY2023-2024/01 on a delivery bed at Kalemungole Health Centre III, Moroto District (Karamoja)	26
Figure 34: Engraving reading GOU/MOH-UGIFT PROJECT FY/2023/2024 on a table at Kamoru Health Centre III, Kotido District (Karamoja)	27
Figure 35: Engraving reading KDLG-UGFIT/HLTH/MAT/ODT/003 on a table at Kyabasara Health Centre III, Kagadi District (Bunyoro)	27
Figure 36: Classroom desks marked RUPA SEED with serial numbers, without a UGIFT marking, at Rupa Seed School, Moroto District (Karamoja).....	27
Figure 37: Engraving reading KWN/MED-EQ/MOYOK HCIII on a steel cupboard at Moyok Health Centre III, Kween District (Sebei)	27
Figure 38: Engraving reading KING SOLOMON SEED SECONDARY SCHOOL, without a UGIFT marking, on furniture at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	27

Figure 39: Microscope marked KAMORU HC III by hand at Kamoru Health Centre III, Kotido District (Karamoja).....	27
Figure 40: Hand-scratched marking beginning Bumu/2020- on a wheelchair armrest at Bumugibole Health Centre III, Bulambuli District (Bugisu)	27
Figure 41: Seed schools and health centres hold most of the recorded value.....	28
Figure 42: Assets verified: Ministries, departments and agencies	29
Figure 43: Good condition, broken and other assets: Ministries, departments and agencies	30
Figure 44: Engraved and not engraved movable assets: Ministries, departments and agencies	31
Figure 45: Recorded value and net book value: Ministries, departments and agencies	32
Figure 46: Assets verified: Health centres	33
Figure 47: Good condition, broken and other assets: Health centres	34
Figure 48: Engraved and not engraved movable assets: Health centres	34
Figure 49: Recorded value and net book value: Health centres	35
Figure 50: Most health centre buildings are non-residential	36
Figure 51: Assets verified: Seed secondary schools	36
Figure 52: Good condition, broken and other assets: Seed secondary schools	37
Figure 53: Engraved and not engraved movable assets: Seed secondary schools	38
Figure 54: Recorded value and net book value: Seed secondary schools	39
Figure 55: Chairs, stools and desks dominate school furniture.....	39
Figure 56: Assets verified: Blood banks.....	40
Figure 57: Good condition, broken and other assets: Blood banks.....	41
Figure 58: Engraved and not engraved movable assets: Blood banks	41
Figure 59: Recorded value and net book value: Blood banks.....	42
Figure 60: Completed blood bank building at Arua Regional Blood Bank, Arua City (West Nile).....	42
Figure 61: Donor couches in the donor room at Arua Regional Blood Bank, Arua City (West Nile).....	42
Figure 62: Markings PEP II/UBTS/COMP/11/016 and UBTS/UGIFT/ARBB/UPS/001 on uninterruptible power supplies at Arua Regional Blood Bank, Arua City (West Nile).....	42
Figure 63: Blood bank refrigerator at Arua Regional Blood Bank, Arua City (West Nile)	43
Figure 64: Platelet agitator at Arua Regional Blood Bank, Arua City (West Nile)	43
Figure 65: Chest freezer at Arua Regional Blood Bank, Arua City (West Nile).....	43
Figure 66: Donor couches in the donor room at Hoima Regional Blood Bank, Hoima City (Bunyoro).....	43
Figure 67: Engraving reading UBTS/UGIFT/VCH/001 on equipment at Hoima Regional Blood Bank, Hoima City (Bunyoro)	43
Figure 68: Blood collection balance at Hoima Regional Blood Bank, Hoima City (Bunyoro)	43
Figure 69: Benchtop centrifuge at Hoima Regional Blood Bank, Hoima City (Bunyoro)	44
Figure 70: Water fire extinguisher at Hoima Regional Blood Bank, Hoima City (Bunyoro)	44
Figure 71: Generator in an outdoor enclosure at Hoima Regional Blood Bank, Hoima City (Bunyoro)	44
Figure 72: A third of verified seed schools had works outstanding.....	45
Figure 73: Unfinished school block at Got Apwoyo Seed Secondary School, Nwoya District (Acholi)	47
Figure 74: Unfinished classroom block at Sidok Seed Secondary School, Kaabong District (Karamoja)	47
Figure 75: Latrine block under construction at Sidok Seed Secondary School, Kaabong District (Karamoja)	47
Figure 76: Building works and construction materials at Ndhew Seed Secondary School, Nebbi District (West Nile)	47
Figure 77: School block awaiting completion at Butungama Seed Secondary School, Ntoroko District (Tooro)	48
Figure 78: Building works at a seed secondary school, Kiboga District (Buganda).....	48
Figure 79: Classroom block with earthworks in the foreground at Kihungya Seed Secondary School, Buliisa District (Bunyoro)	48
Figure 80: Unfinished laboratory building at a health centre, Sironko District (Bugisu)	48
Figure 81: Biology laboratory under construction at a seed secondary school, Buliisa District (Bunyoro)	48
Figure 82: Unfinished laboratory interior at Kihungya Seed Secondary School, Buliisa District (Bunyoro).....	48
Figure 83: Library interior under construction at Kihungya Seed Secondary School, Buliisa District (Bunyoro)	48
Figure 84: ICT laboratory interior under construction at Kitawoi Seed Secondary School, Kween District (Sebei)	48
Figure 85: Laboratory benches with cupboard doors not yet fitted, in a science laboratory block recorded as under construction, at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	48
Figure 86: Empty computer laboratory at Kaptum Seed Secondary School, Kween District (Sebei), where the buildings had not been handed over and no ICT equipment had been received	48
Figure 87: Maternity care and access to education were the most reported benefits	53
Figure 88: Health centre building at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)	54
Figure 89: Health centre buildings and covered walkway at Kihuukya HC III, Hoima City (Bunyoro).....	54
Figure 90: Binocular microscope at Kihuukya HC III, Hoima City (Bunyoro).....	54
Figure 91: Adult weighing scale with a height meter and waiting benches at Iruhura HC III, Kabarole District (Tooro).....	54
Figure 92: Maternity block entrance and access ramp at Kamuli HC III, Tororo District (Bukedi).....	54

Figure 93: Classroom furnished with desks and a whiteboard at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)	55
Figure 94: Books displayed on library shelves at Sibanga Seed School, Manafwa District (Bugisu)	55
Figure 95: ICT laboratory block and entrance ramp at Sisiyi Seed Secondary School, Bulambuli District (Bugisu)	55
Figure 96: Power, staffing and space were the gaps most often raised	56
Figure 97: Most facilities met repairs from their own funds or staff	59
Figure 98: Annual, monthly and quarterly checks were the most common stated intervals	59
Figure 99: Infant radiant warmer at a health centre, Makindye-Ssabagabo Municipal Council (Buganda)	81
Figure 100: Oxygen cylinders marked KIBIRI HCIII at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)	81
Figure 101: Wooden waiting bench at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)	81
Figure 102: Delivery bed and clinical furniture at a health centre, Kabarole District (Tooro)	81
Figure 103: Oxygen concentrator at Kalemungole HC III, Moroto District (Karamoja)	82
Figure 104: Suction apparatus at Kalemungole HC III, Moroto District (Karamoja)	82
Figure 105: Oxygen concentrator at Kamoru HC III, Kotido District (Karamoja)	82
Figure 106: Instrument trolley with delivery instruments at Kamoru HC III, Kotido District (Karamoja)	82
Figure 107: Medical-waste bins and ward beds at Butiaba HC III, Buliisa District (Bunyoro)	82
Figure 108: Laboratory centrifuge at Butiaba HC III, Buliisa District (Bunyoro)	82
Figure 109: Blood pressure apparatus on a mobile stand at Butiaba HC III, Buliisa District (Bunyoro)	82
Figure 110: Office chairs at Butiaba HC III, Buliisa District (Bunyoro)	82
Figure 111: Kangaroo care chair at Kyabasara HC III, Kagadi District (Bunyoro)	82
Figure 112: Infant weighing scale at Buwembe HC III, Busia District (Bukedi)	83
Figure 113: Autoclave above a gas cylinder at Buwembe HC III, Busia District (Bukedi)	83
Figure 114: Autoclave at Atar HC III, Kween District (Sebei)	83
Figure 115: Kangaroo care chair at Atar HC III, Kween District (Sebei)	83
Figure 116: Binocular microscope on a trolley at Namusita HC III, Budaka District (Bukedi)	83
Figure 117: Infant weighing scales at Namusita HC III, Budaka District (Bukedi)	83
Figure 118: Delivery bed with side rails at Kabweri HC III, Kibuku District (Bukedi)	83
Figure 119: Health centre building, Nwoya District (Acholi)	84
Figure 120: Solar panels at Kalemungole HC III, Moroto District (Karamoja)	84
Figure 121: Patient toilet block at Kalemungole HC III, Moroto District (Karamoja)	84
Figure 122: Power house at Kyabasara HC III, Kagadi District (Bunyoro)	84
Figure 123: Latrine block and paved access at Kyabasara HC III, Kagadi District (Bunyoro)	84
Figure 124: Solar batteries at Bunangaka HC III, Bulambuli District (Bugisu)	84
Figure 125: Solar batteries and control equipment at Atar HC III, Kween District (Sebei)	84
Figure 126: Sanitation block with external handwashing basins at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)	85
Figure 127: Waste disposal structure at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)	85
Figure 128: Water tanks on a steel tower at Kabweri HC III, Kibuku District (Bukedi)	85
Figure 129: Science laboratory tables and stools at a seed secondary school, Kalangala District (Buganda)	85
Figure 130: Library shelves and reading tables at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)	85
Figure 131: Anatomical teaching model at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)	85
Figure 132: Laboratory glassware and equipment at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)	85
Figure 133: Desktop computers and classroom furniture at a seed secondary school, Busia District (Bukedi)	86
Figure 134: Classroom desks at a seed secondary school, Ntoroko District (Tooro)	86
Figure 135: Classroom desks at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	86
Figure 136: Laboratory benches and sinks at Bweema Seed Secondary School, Buvuma District (Buganda)	86
Figure 137: Classroom desks at Bweema Seed Secondary School, Buvuma District (Buganda)	86
Figure 138: Laboratory supplies and an anatomical teaching model at Rupa Seed School, Moroto District (Karamoja)	86
Figure 139: Computer equipment in the school ICT room at Kabeywa Seed Secondary School, Kapchorwa District (Sebei)	87
Figure 140: Library shelving and tables at Kabeywa Seed Secondary School, Kapchorwa District (Sebei)	87
Figure 141: Office desk and other furniture at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)	87
Figure 142: Laboratory tables at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)	87
Figure 143: Library shelving at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)	87
Figure 144: Anatomical skeleton teaching model at Kamonkoli Seed Secondary School, Budaka District (Bukedi)	87
Figure 145: Laboratory benches, stools and sinks at Nansanga Seed Secondary School, Budaka District (Bukedi)	87
Figure 146: Library shelving with books at Nansanga Seed Secondary School, Budaka District (Bukedi)	87
Figure 147: Buildings at a seed secondary school, Nwoya District (Acholi)	88
Figure 148: School blocks at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)	88
Figure 149: School buildings and courtyard at a seed secondary school, Buvuma District (Buganda)	88

Figure 150: Raised water storage tank at a seed secondary school, Buvuma District (Buganda)	88
Figure 151: Sanitation block at Bweema Seed Secondary School, Buvuma District (Buganda)	89
Figure 152: Water tank and enclosed service structures at Bweema Seed Secondary School, Buvuma District (Buganda)	89
Figure 153: Borehole apron and pipework at Katikekire Seed School, Moroto District (Karamoja)	89
Figure 154: Section of the science laboratory exterior at Iriiri Seed Secondary School, Napak District (Karamoja)	89
Figure 155: Water storage tanks at Lopei Seed Secondary School, Napak District (Karamoja)	89
Figure 156: Computer and library block at Lopei Seed Secondary School, Napak District (Karamoja)	89
Figure 157: Water tanks on a rendered plinth and steel tower at Alerek Seed Secondary School, Abim District (Karamoja)	89
Figure 158: Water storage tanks at Rengen Seed School, Kotido District (Karamoja)	90
Figure 159: Gas cylinders and pipework at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	90
Figure 160: Water tank on a masonry support at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	90
Figure 161: Elevated water tank on a steel tower at King Solomon Seed Secondary School, Kagadi District (Bunyoro)	90
Figure 162: Rainwater tank beside a staff house at Rupa Seed School, Moroto District (Karamoja)	90

List of acronyms

GOU	Government of Uganda
HC	Health centre
ICT	Information and communications technology
IFMIS	Integrated Financial Management Information System
LGFC	Local Government Finance Commission
MAAIF	Ministry of Agriculture, Animal Industry and Fisheries
MDA	Ministry, department or agency
MoES	Ministry of Education and Sports
MOES	Ministry of Education and Sports (as engraved)
MoFPED	Ministry of Finance, Planning and Economic Development
MoGLSD	Ministry of Gender, Labour and Social Development
MoH	Ministry of Health
MOH	Ministry of Health (as engraved)
MoLG	Ministry of Local Government
MoLHUD	Ministry of Lands, Housing and Urban Development
MoPS	Ministry of Public Service
MoWE	Ministry of Water and Environment
MoWT	Ministry of Works and Transport
NEMA	National Environment Management Authority
OAG	Office of the Auditor General
OPM	Office of the Prime Minister
PforR	Program-for-Results
PPDA	Public Procurement and Disposal of Public Assets Authority
RCU	Reform Coordination Unit
TELA	Teacher Effectiveness and Learner Assessment
UBTS	Uganda Blood Transfusion Services
UgIFT	Uganda Intergovernmental Fiscal Transfer
UGX	Uganda shillings
UPS	Uninterruptible power supply

Executive summary

The Uganda Intergovernmental Fiscal Transfers (UgIFT) Programme is a government programme implemented through a Program-for-Results (PforR) operation, launched and aligned with the broader Intergovernmental Fiscal Transfer Reform Programme (2015). UgIFT began with US\$200 million in financial year 2017/18, supporting education and health. It was later expanded through additional financing of US\$300 million, including support for refugee hosting districts, to water and environment and to agriculture (micro-scale irrigation), bringing the overall funding to US\$500 million.

The implementation of the UgIFT programme came to an end on 31 December 2025. As part of the programme closure activities, the Ministry of Finance, Planning and Economic Development (MoFPED), through the Reform Coordination Unit (RCU), carried out an end of programme asset verification exercise to take stock of the assets procured under the programme and to help put in place plans to hand them over to government for sustainability purposes.

The exercise was conducted at two levels: the national level ministries, departments and agencies (MDAs) of government, and the local governments, covering the government seed secondary schools in underserved subcounties and the health facilities upgraded from Health Centre II to Health Centre III. At national level, the verification focused on retooling assets such as computers, tablets, photocopiers, furniture, motorcycles and motor vehicles. At local government level, all 176 local governments (districts, cities and municipalities) were visited and the assets verified.

The verification found that UgIFT buildings and equipment were supporting services, while unfinished works, power constraints, damage and delayed installation prevented some assets from serving their intended purpose. The main follow-up is to put unused assets into service and sustain those already working.

Scope and coverage

National verification began on 24 July 2026 with the 15 MDAs listed for the exercise, 13 of which held UgIFT assets. The three regional blood banks and the 176 local governments were verified from 24 August to 7 September 2026. At local government level, the programme list, which sets out the facilities planned for verification before the exercise started, held 629 facilities: 371 health centres and 258 seed schools (section 2.4). Accessories and consumables were not part of the verification.

Findings are reported in one sequence: availability, condition, identification and financial aspects, first for the programme (section 4.1) and then for ministries and agencies (section 4.2), health centres (section 4.3), seed secondary schools (section 4.4) and blood banks (section 4.5). Facility coverage and the programme list follow in section 4.6, and service delivery in section 4.7. Table 1 summarises the key statistics.

Table 1: Key statistics of the UgIFT asset verification

Measure	Result
Coverage and facilities	
MDAs visited	15, of which 13 held UgIFT assets
Regional blood banks verified	3 (Arua, Hoima and Soroti)
Local governments visited	176
Facilities on the programme list	629 (371 health centres and 258 seed schools)
Facilities verified	590 (93.8%)
Verified facilities with works completed	475 (80.5%)
Verified facilities with works not completed	115 (19.5%)

Measure	Result
Verified facilities providing services	520 (88.1%)
Programme-list facilities that were not UgIFT in practice	18 (2.9%), including 10 that do not exist or were not constructed
Assets	
Assets in this report	226,280
Good condition (in use or in store)	215,879 (95.4%)
In use	212,760 (94.0%)
In store	3,119 (1.4%)
Broken	3,392 (1.5%)
Not in use for another reason	7,009 (3.1%)
Identification	
Verified assets (movable assets)	216,736
Engraved	49,457 (22.8%)
Properly engraved (UgIFT marking)	23,434 (10.8%)
Not properly engraved (another marking only)	26,023 (12.0%)
Not engraved	167,279 (77.2%)
Value at 30 September 2026	
Recorded value	UGX 971,615,425,138
Net book value	UGX 808,621,845,836
Maintenance and service delivery	
Facilities working to a fixed maintenance interval	50 of 494 (10.1%)
Facilities reporting idle or unusable equipment	156 of 477 (32.7%)
Health centres reporting at least one benefit	237 of 284 (83.5%)
Health centres reporting improved maternity and delivery services	117 of 284 (41.2%)
Seed schools reporting at least one benefit	144 of 193 (74.6%)
Facilities raising power as a gap	200 of 477 (41.9%)

Counts of facilities for coverage, facilities, maintenance and service delivery; counts of assets otherwise. Asset shares are of the assets in this report. Good condition is assets in use plus assets in store. Identification shares are of movable assets.

Conditions and use status

The UgIFT asset verification records in this report hold 226,280 assets: 16,668 at ministries and agencies, 626 at blood banks and 208,986 at health centres, seed schools and district offices. 215,879 (95.4%) were in good condition, meaning in use (212,760) or in store (3,119). 3,392 (1.5%) were broken and 7,009 (3.1%) were not in use for another reason (section 4.1.2).

Identification (engraving) and custody

Of the 216,736 movable assets, 22.8% were engraved and 77.2% were not engraved. Only 10.8% were properly engraved with the UgIFT marking, while 12.0% were not properly engraved, carrying another marking only (section 4.1.3).

The records also describe assets that were not at the facility at the time of the visit: 2,522 (18.7%) of the assets not in use had not yet been delivered or handed over, were held elsewhere or were not at the facility when the teams visited, including 985 assets for five seed schools that the suppliers had not yet delivered. A further 525 assets, mostly computers and related equipment at seed schools, were reported stolen or lost.

National level: ministries, departments and agencies

The 16,668 assets at ministries and agencies include 10,783 at the Ministry of Education and Sports (MoES), mainly Teacher Effectiveness and Learners Assessment (TELA) handsets and tablets. LGFC and MoPS received no UgIFT assets. Of the 16,668 assets, 16,648 (99.9%) were in use. The assets not in use were 16 whose location the Ministry of Works and Transport was tracing, 3 damaged laptops at the Office of the Prime Minister and 1 boarded off pickup at the Ministry of Health. Figure 45 ranks the ministries by value.

Of the 15,385 movable assets at ministries and agencies, 4,843 (31.5%) were engraved and 97.7% of those engraved assets carried the UgIFT marking (Table 11).

Ministry computers sit inside the ICT equipment reported in section 4.2. The Ministry of Education and Sports, the Ministry of Water and Environment and the Ministry of Agriculture, Animal Industry and Fisheries hold the largest ICT stocks.

Blood banks

UgIFT financed the construction of the Arua and Hoima regional blood banks, which were completed and commissioned, and the rehabilitation of Soroti Regional Blood Bank, all operating under Uganda Blood Transfusion Services (UBTS). The records hold 626 blood bank assets, of which 602 (96.2%) were working and in use; the 24 not in use were all at Arua, among them 6 broken blood pressure machines. Only 43 of the 605 verified assets (7.1%) were engraved, all at Arua, and 26 (4.3%) carried the UgIFT marking. Arua and Soroti named too few vehicles for blood collection and an unreliable water source among their challenges, together with too few medical personnel at Arua and insecurity at Soroti (section 4.2).

Local governments: health centres and seed schools

Of the 629 programme-list facilities, 590 (93.8%) were verified (Table 27). Works were complete at 475 (80.5%): 92.2% of verified health centres but only 63.8% of verified seed schools. Of the verified facilities, 520 (88.1%) were providing services, including 63 where some works were still outstanding, while 24 (4.1%), 21 of them seed schools, were not yet providing services (section 4.3.1).

Construction and service readiness need attention together. Got Apwoyo Seed Secondary School in Nwoya had not been commissioned and its ICT package remained at district headquarters. At Ndhew and Mamba seed schools in Nebbi, unfinished buildings delayed installation, while at Atego in the same district computers were already working in older rooms as construction continued.

School furniture was the largest asset category, with 109,713 assets or 75.5% of seed school assets, and clinical equipment and clinical furniture made up 72.5% of health centre assets. Health centres had the highest share not working (8.9%) and seed schools the largest number broken down (2,722). Seed schools had engraved 25.3% of their verified assets and health centres 15.2%, but more than half of these carried another marking only (section 4.3.3).

Inconsistencies with the programme list

Reconciliation identified 55 programme-list entries (8.7%) that differed from the facilities found: 10 that do not exist or were not constructed under the programme, 4 replaced by another facility, 30 operating under another name, 3 that are not UgIFT beneficiaries, 3 whose UgIFT assets were relocated to another facility and 5 that exist with no UgIFT assets (Table 29).

In all, 18 programme-list facilities (2.9%) were not UgIFT facilities in practice, although the programme list recorded 16 of them as complete. Eight (1.3%) exist but are not UgIFT beneficiaries or received no UgIFT assets. The other 10 do not exist or were not constructed under the programme: the health centre entries Olok HC II (Pader), Alik HC II (Lira), Acimi HC II, Acokara HC II and Ariba HC II (Oyam), Busia Eastern Division (Busia Municipal Council) and Butoloogo HC II (Kassanda), and the seed school entries Eastern Division (Tororo Municipal Council), Central Division (Jinja City) and Kishangara Seed School (Ibanda).

The programme list also recorded 44 facilities as complete where works were outstanding, and three facilities found outside the list were confirmed as additional beneficiaries. Section 4.3.2 sets out these cases and Appendix F names every facility with an inconsistency.

Utilisation status of assets

The share of assets in use was 94.0%: 99.9% at ministries and agencies, 96.2% at blood banks, 94.6% at seed schools and 91.1% at health centres. Good condition, which adds assets in store, was 95.4% (section 4.1.2).

The 3,200 assets in storage were at 181 facilities, 2,681 (83.8%) of them at health centres, with clinical equipment the largest group (1,685). Of the stored assets, 190 (5.9%) were waiting for a power connection, 80 (2.5%) for a building or room and 141 (4.4%) were held at district stores or at another facility, while 519 (16.2%) were described as new, boxed or in good condition. Examples include 211 stored assets at health centres in Kabarole and 159 in Omoro, and computer equipment kept in store at Akadot Seed Secondary School in Pallisa, which has no electricity, and at Lungulu Seed Secondary School in Nwoya, which was awaiting a power connection.

The 3,392 assets broken down were at 183 facilities, and school furniture accounted for 2,462 (72.6%) of them. The largest group was at Mpungwe Seed Secondary School in Mayuge District, with 275 assets, mainly learners' chairs and laboratory stools (section 4.5.2).

Of the 477 facilities that described their services, 156 (32.7%) reported equipment that was idle or could not be used. They linked it to power (45.5%), training or skills to operate the equipment (33.3%), installation or assembly (20.5%), incomplete buildings or lack of space (17.3%), missing accessories or consumables (9.6%) and staffing (5.8%). Training led at health centres (45.9%) and power at seed schools (53.3%). Pamaka Health Centre III in Nebbi, for example, could not use its oxygen equipment because of power constraints.

Maintenance practice

Of the 469 facilities that described their maintenance arrangements, 260 (55.4%) met repairs at facility level from their own funds or staff and 151 (32.2%) drew on district, regional or national technical support, while 36 (7.7%) reported no repair arrangement. Busaale Health Centre III in Kayunga, which used Primary Health Care funds for maintenance, still needed roof, door and solar repairs.

Of the 494 facilities that described how they maintain or check their assets, only 50 (10.1%) worked to a fixed interval: 28.0% of these annually, 22.0% monthly, 20.0% quarterly and 18.0% every school term. Another 62 (12.6%) repaired items as the need arose, and 318 of the 463 facilities that answered (68.7%) kept a regular record of asset functionality or breakdowns (section 5.1).

Service delivery benefits and user gaps

Of the 284 health centres that described service delivery, 237 (83.5%) reported at least one benefit from the UgIFT support. Improved maternity and delivery services were reported by 117 (41.2%), and 51 (18.0%) reported more or safer births at the facility; improved access to care was reported by 70 (24.6%) and more patients attending by 60 (21.1%). Kagumba Health Centre III in Kamuli reported more than 50 deliveries a month in its new maternity ward.

Of the 193 seed schools, 144 (74.6%) reported a benefit, led by a better learning environment (74, 38.3%) and improved access to secondary education (59, 30.6%), while practical science or ICT teaching improved at 39

schools (20.2%). Enrolment at Bwizi Seed Secondary School in Kamwenge grew from 204 to 1,108 students (section 4.7.1).

Nearly all facilities, 452 of the 477 (94.8%), also raised at least one gap, most often power (41.9%), staffing (32.3%), inadequate space or infrastructure (31.7%), security or fencing (27.3%) and repair or maintenance support (22.2%). Training to operate equipment was raised mainly by health centres (28.9%) and incomplete works mainly by seed schools (28.0%) (section 4.7.2).

Financial value

The 226,280 assets carry a recorded value of UGX 971,615,425,138 and a net book value of UGX 808,621,845,836 at 30 September 2026 (section 4.1.4). Seed schools hold UGX 678,247,549,426 (69.8%) and health centres UGX 259,662,849,164 (26.7%). Ministries and agencies hold UGX 31,822,306,095 and blood banks UGX 1,451,584,715. MoES holds UGX 14,925,128,359.

Main recommendations

Chapter 5 links each recommendation to the finding it answers. The main recommendations are:

- **Maintenance and repairs (section 5.1):** only 10.1% of facilities worked to a fixed maintenance interval and 36 reported no repair arrangement. Facilities should adopt a condition check every school term in schools and every quarter in health centres, an annual count of UgIFT assets and a fault list, with district offices reviewing unresolved repairs each quarter.
- **Restore safe operation (section 5.2):** 3,392 assets were broken down, damaged or obsolete. Facilities and districts should assess them in order of their effect on care and teaching, starting with clinical equipment and unsafe school furniture; OPM should decide on its three damaged laptops and UBTS on the six broken blood pressure machines at Arua.
- **Complete works and bring stored assets into use (section 5.3):** 115 verified facilities had works outstanding and 3,200 assets were in storage. Districts should agree site-specific completion plans, starting with the 22 of these facilities that were not yet providing services, and set dates to connect, install and issue stored assets once rooms and power are ready.
- **Equip staff to operate and maintain assets (section 5.4):** 52 facilities, 51 of them health centres, linked idle equipment to staff being unable to operate it. Suppliers and district health officers should provide practical training and demonstrate equipment to its users before acceptance.
- **Strengthen identification and custody (section 5.5):** 175,242 verified assets (78.0%) were not engraved and 26,023 carried another marking only. Asset managers should apply the UgIFT marking, starting with hospital equipment and the MoES handsets and tablets, and document transfers between facilities.
- **Resolve programme-list inconsistencies (section 5.6):** MoFPED, with MoH, MoES and the local governments concerned, should approve a corrected programme list that removes or annotates the 18 entries that were not UgIFT facilities in practice, links replaced and renamed entries, corrects the construction status of 48 entries and adds the 3 confirmed additional beneficiaries.
- **Plan for continued service delivery (section 5.7):** power, staffing and space were the gaps most often raised (41.9%, 32.3% and 31.7% of facilities). Districts and sector ministries should address them first and confirm facility readiness before future deliveries.

Table 33 in section 5.8 sets out eight priority actions with proposed owners, timing and evidence of completion. The proposed priorities are to make unsafe items safe, restore essential equipment, complete works and utilities, and install usable stored assets, with facility managers leading routine checks and minor repairs, supported by district engineers, health and education officers and the relevant technical teams.

1 Introduction and background

1.1 Introduction

UgIFT invested in facilities and equipment to bring education and health services closer to communities and strengthen the institutions that support them. This verification examined where those assets were, how they were being used and what was needed to keep them working. The findings focus on facilities, equipment, custody, maintenance and the services available to the public.

1.2 Background to the verification

The programme ended on 31 December 2025. The Ministry of Finance, Planning and Economic Development commissioned the verification to support closure and the continued use of programme assets. The exercise covered national institutions, government seed secondary schools and health facilities upgraded from Health Centre II to Health Centre III.

1.3 Justification

Buildings and equipment need staff, utilities, maintenance and clear responsibility for their care. The verification provided a basis for handover and identified practical actions to bring unused assets into service, repair damaged items and protect assets already in use.

1.4 Objectives of the assignment

The assignment was to identify and locate programme assets, check their condition and use, assess how institutions cared for them and recommend action where assets were damaged or unserviceable. It also prepared asset information for government reporting and the Integrated Financial Management Information System (IFMIS).

1.5 Scope of work

Teams reviewed institutional asset information, inspected facilities and equipment, and spoke with the officers responsible for their use and care. The scope included buildings, furniture, medical equipment, computers, vehicles and motorcycles. Accessories and consumables were not included in the verification. Small office items such as staplers and punches and disposable school laboratory items were also excluded from physical inspection.

2 Approach and methodology

The assignment followed 3 phases: preparation, field verification, and consolidation and reporting.

2.1 Preparation

The entry meeting on 29 May 2026 agreed the scope, approach and work plan. A pilot at Buloba Health Centre III and Sumbwe Seed School in Wakiso District tested the tools and visit arrangements. Teams planned visits with Accounting Officers, district health and education officers, finance staff, head teachers and health centre in-charges.

2.2 What teams checked

At each institution, the team checked the assets present, their location, engraving, condition and use. Interviews covered repairs, servicing, breakdowns, storage, operating constraints and service benefits. Photographs documented selected assets and facilities.

2.3 Fieldwork and itinerary

National verification began on 24 July 2026 with the 15 ministries, departments and agencies (MDAs) named in section 2.4, and included 10 working days of collection and repeat visits. Training for the local government teams took place on 20 and 21 August 2026. Local government fieldwork, which also covered the three regional blood banks, ran from 24 August to 7 September 2026, with 10 working days of collection.

The Consultant deployed 33 teams of 2 to 3 people, comprising 80 research assistants, supported by 6 supervisors and a team leader, across 176 local governments. Teams first met the local government leadership, reviewed the planned investments, visited the facilities and discussed the findings with the responsible officers. Table 2 sets out the sequence followed during local government visits.

Table 2: Local government field itinerary

Day	Activity	Work undertaken
1	Arrival and entry	Register the visit at the Accounting Officer's office and hold the entry meeting with finance and administration.
1	Document review	Review UgIFT documents and the asset register.
2	Physical verification	Inspect identified assets in offices, health centres and schools.
2	Service interviews	Discuss functionality, maintenance and sustainability with institution and facility management.
2	Follow up and debrief	Complete follow up checks, debrief the responsible officers and finalise verification.

2.4 Facilities and institutions expected

The programme list sets out the institutions and facilities planned for verification before the exercise started. It formed the baseline against which the teams accounted for every expected site, and it covers three levels: national institutions, the regional blood banks and local government facilities.

At national level, the list comprised the 15 MDAs visited from 24 July 2026: the Ministry of Finance, Planning and Economic Development (MoFPED), the Ministry of Works and Transport (MoWT), the Ministry of Education and Sports (MoES), the Ministry of Agriculture, Animal Industry and Fisheries (MAAIF), the Ministry of Health (MoH), the Office of the Prime Minister (OPM), the Ministry of Water and Environment (MoWE), the Ministry of Gender, Labour and Social Development (MoGLSD), the Local Government Finance Commission (LGFC), the National Environment Management Authority (NEMA), the Public Procurement and Disposal of Public Assets Authority

(PPDA), the Office of the Auditor General (OAG), the Ministry of Public Service (MoPS), the Ministry of Lands, Housing and Urban Development (MoLHUD) and the Ministry of Local Government (MoLG). Thirteen of them held UgIFT assets, and section 4.1 reports on each.

Section 4 reports ministries and agencies, blood banks, health centres and seed secondary schools.

The list also included the three regional blood banks of Uganda Blood Transfusion Services (UBTS) at Arua, Hoima and Soroti, which the programme built or rehabilitated. Section 4.2 reports them separately from the health centres and seed schools.

At local government level, the programme list held 629 facilities: 371 health centres and 258 seed secondary schools. Three entries that repeated a facility already listed are counted once. Table 3 shows where the listed facilities are located and the construction status recorded on the list before the verification. The list recorded 547 facilities (87.0%) as complete and 82 (13.0%) as ongoing; ongoing works were more common among seed schools (63, or 24.4%) than among health centres (19, or 5.1%).

Table 3: Facilities on the programme list

Region	Health centres	Seed schools	Total	Recorded complete	Recorded ongoing
Central	62	37	99	89 (89.9%)	10 (10.1%)
Eastern	93	76	169	151 (89.3%)	18 (10.7%)
Northern	92	74	166	142 (85.5%)	24 (14.5%)
Western	124	71	195	165 (84.6%)	30 (15.4%)
Total	371	258	629	547 (87.0%)	82 (13.0%)

Construction status as recorded on the programme list before the verification started. Percentages are shares of the facilities in each row.

The regional split describes the programme list only. Chapter 4 compares what was found with this list: section 4.3.1 sets out the facilities verified, completed and providing services, and section 4.3.2 sets out the inconsistencies between the list and the facilities found, including facilities that do not exist, operate under another name or did not receive UgIFT assets. Appendix F names every facility with an inconsistency, together with the facilities found outside the programme list.

2.5 Quality assurance

Regional supervisors checked daily field activity and reviewed the completed tools. The central technical team carried out spot checks and helped resolve operational questions. Teams compared institutional asset information with the items and explanations provided during visits, while supervisors referred matters requiring clarification to the team leader and field coordinator.

2.6 Bringing the findings together

The analysis brought together physical inspection, discussions with facility managers, photographs and the asset counts for each institution and type of asset. Names on the programme list were reconciled with operating names, replacements and receiving facilities, so that each facility is counted once. The findings distinguish assets available for service from equipment awaiting installation, items requiring repair and facilities requiring completion.

Findings are reported at national level and in the order in which the verification took place. Section 4.1 covers the national institutions verified from 24 July 2026, section 4.2 the blood banks and section 4.3 the local government health centres and seed schools, both verified from 24 August 2026; a district is named only where it illustrates a finding. Sections 4.4 to 4.7 then examine condition and use, the status of equipment, financial

value and service delivery across all institutions, and chapter 5 links each recommendation to the finding it answers. The appendices provide the detailed schedules.

2.7 Asset categories, condition, use and identification

Asset categories. Each asset is counted once. Health centre assets are grouped as clinical equipment, clinical furniture, maternity ward equipment, ICT equipment and health centre buildings, with any remaining health centre assets shown separately. Seed school assets are grouped as school buildings, split into residential and non-residential, water facilities, school furniture (desks, tables, chairs, stools and other furniture), computers and related equipment, and ICT equipment such as printers and cameras, again with any remaining school assets shown separately. Ministry and blood bank assets are grouped as ICT equipment, furniture, vehicles, buildings, medical equipment and other assets. **Condition.** An asset in good condition is in use or in store. Broken assets are counted separately, including broken assets found in store. Other assets are not in use for another reason. **Identification.** Engraving is reported for movable assets. Properly engraved means the UgIFT marking. Buildings and land are identified through property and site records.

Condition and use. Condition and use are reported as recorded for each asset during the verification. A working asset is one recorded as functional and in use. An asset recorded as faulty is reported as not working and not in use. This covers assets that were broken down or damaged as well as assets held in storage, held elsewhere, not yet delivered or awaiting power, installation, completion of buildings or trained users, and the reasons recorded by the teams distinguish between them. Percentages are shares of the assets in each institution group or category.

Identification. The engraving statistics use verified assets as their base: the movable assets verified at each institution. Buildings, structures and land are identified through property and site records, and accessories and consumables were not part of the verification, so both are excluded from this base. An asset is properly engraved when it carries the UgIFT programme marking, including variant spellings of the programme identifier, and not properly engraved when it carries another marking only, such as a school, facility, district or ministry code without the programme identifier. Assets carrying no engraving are reported as not engraved.

2.8 Valuation basis

Recorded values, depreciation and net book values follow the Government of Uganda Asset Accounting Policies and Guidelines 2023. Recognition follows sections 3.2.1 and 3.3.3, and useful lives follow the asset class framework in Annex 1. Depreciation is charged on a straight line basis with nil residual value under sections 5.5 and 5.7, up to 30 September 2026; capital work in progress is not depreciated.

Unit values, useful lives and commencement dates are those held in the UgIFT asset verification records, and any unit value below UGX 10,000 is carried at zero. Net book value is calculated for each asset as its recorded value less accumulated depreciation, with a minimum of zero, before amounts are totalled. Section 4.6 presents the values by institution group and Appendix D gives the detailed schedules.

3 Project context

3.1 Programme background and design

UgIFT began in financial year 2017/18 to improve the financing and delivery of local government services. Initial support focused on education and health. Later support extended the programme to water and environment and agricultural micro scale irrigation, including services for refugees and host communities.

3.2 Programme components

The programme supported a fairer system of grants to local governments, new secondary schools in underserved subcounties, and construction and upgrading of health facilities. School investments included classrooms, laboratories, administration blocks, sanitation and teachers' housing. Health investments included buildings, equipment, staff accommodation and sanitation.

It also supported local government planning, budgeting, procurement and infrastructure management, together with performance assessment and technical support. National institutions received equipment and transport to support programme administration and oversight.

3.3 Programme objectives

The programme sought more adequate and predictable support, fairer allocation of resources and stronger oversight of local services. Its intended result was wider access to education, health, water and irrigation services and better management of the facilities and resources used to provide them.

3.4 Delivery position at programme closure

At closure, 196 of the 259 seed schools in the programme output account were complete and 189 were operational. The health output account showed 354 of 373 upgrades and new constructions complete. Table 4 summarises the outputs reported for each sector at closure. These closure figures show the delivery position before the verification visits; section 4.3.1 sets out the facilities verified, completed and providing services at the time of those visits.

Table 4: Programme outputs at closure

Sector	Outputs
Education	196 of 259 seed schools complete; 189 operational.
Health	354 of 373 health facility upgrades and new constructions complete.
Water and environment	758 piped water systems; 5,398 point water sources; 7,082 water supply systems rehabilitated; 325 designs completed; 256 sanitation facilities.
Micro scale irrigation	More than 6,235 irrigation systems installed, covering 4,843 hectares; 632 demonstration sites in 135 local governments.
Refugee host services	51 primary schools and 35 health facilities transitioned into local government services.
Blood banks	Arua and Hoima regional blood banks completed and commissioned; Soroti Regional Blood Bank rehabilitated.

4 Findings

The findings follow one sequence for the programme as a whole and again for each institution group: availability of the assets, condition of the assets, identification including engraving, and financial aspects. Ministries and agencies come first, then health centres, seed secondary schools and the regional blood banks. Health centres and seed schools are reported at facility-type level, by asset category, rather than facility by facility. Later sections return to the programme list, service delivery and the priorities for follow-up.

4.1 Availability, condition, identification and value


4.1.1 Availability of the assets

The verification records in this report hold 226,280 assets. Seed secondary schools hold 145,376 (64.2%) and health centres 63,606 (28.1%). Ministries and agencies hold 16,668 and the blood banks 626. Table 5 and Figure 1 show the shares.

Table 5: Availability of verified assets by institution group

Institution	Assets verified	Share
Ministries and agencies	16,668	7.4%
Blood banks	626	0.3%
Health centres	63,606	28.1%
Seed secondary schools	145,376	64.2%
District offices	4	0.0%
Total	226,280	100.0%

Seed schools and health centres hold most verified assets

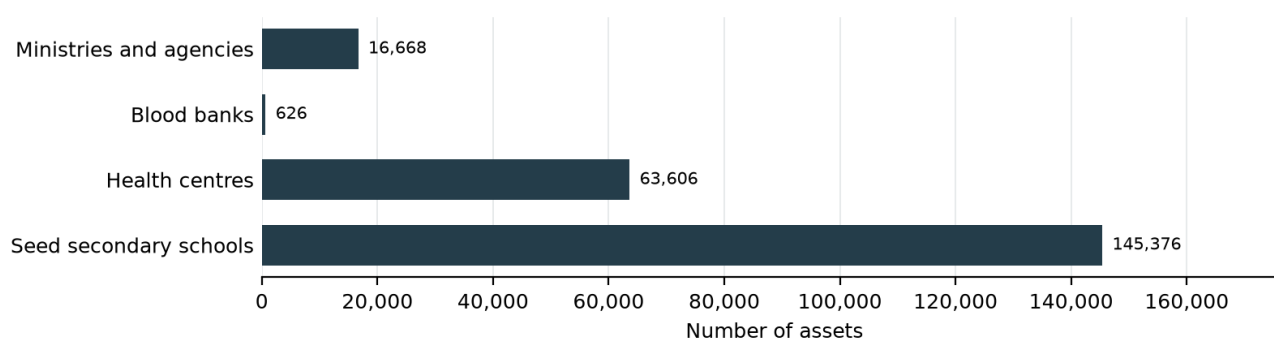

Source: UgIFT asset verification records.

Figure 1: Seed schools and health centres hold most verified assets

4.1.2 Condition of assets

Good condition means an asset is in use or in store. On that definition, 215,879 assets (95.4%) were in good condition: 212,760 in use and 3,119 in store. 3,392 assets (1.5%) were broken, and 7,009 (3.1%) were not in use for another reason. Table 6 places every ministry beside the health centres, seed schools and blood banks. Figure 2 shows the same split, and Figure 3 shows the share in good condition.

Most of the stock was already in service. The assets that were not in use tell a shorter story. Some were in store and still in good condition, so they can be issued once power, a room or handover is in place. Others were broken and need repair before they can support a service. The rest were not in use because delivery, installation or the facility itself was not yet ready. At the ministries, 20 assets were not in use. Sixteen of them were at the Ministry

of Works and Transport, whose location was still being traced, and three were damaged laptops at the Office of the Prime Minister. Health centres had the larger share of assets in store. Seed schools had the larger share of broken furniture.


The field visits show how those numbers sit in a facility. At Lungulu Seed Secondary School in Nwoya District, desktop computers, a printer and UPS units were still boxed because the school was waiting for a power connection. At Nansanga Seed Secondary School in Budaka, 27 of 28 desktop computers remained packed for lack of reliable power. Broken desks and stools were in classrooms and stores at seed schools in Namisindwa and Napak. A delivery bed at a health centre in Busia District had a torn mattress cover. At Arua Regional Blood Bank, six blood pressure machines were damaged or not functional. The same pattern runs through the categories in the sections that follow: most assets work and are in use, a smaller group is in store and still sound, and a smaller group again is broken.

Table 6: Condition of verified assets by institution

Institution	Assets verified	Good condition		Broken	Other
		In use	In store		
MoFPED	458	458	0	0	0
MoWT	88	72	0	0	16
MoES	10,783	10,783	0	0	0
MAAIF	2,045	2,045	0	0	0
MoH	264	263	0	1	0
OPM	10	7	0	3	0
MoWE	2,939	2,939	0	0	0
MoGLSD	10	10	0	0	0
NEMA	6	6	0	0	0
PPDA	5	5	0	0	0
OAG	20	20	0	0	0
MoLG	13	13	0	0	0
MoLHUD	27	27	0	0	0
Health centres	63,606	57,921	2,629	660	2,396
Seed secondary schools	145,376	137,585	490	2,722	4,579
Blood banks	626	602	0	6	18
District offices	4	4	0	0	0
Total	226,280	212,760	3,119	3,392	7,009

Good condition is assets in use plus assets in store. Broken assets are counted on their own, including broken assets found in store. Other assets are not in use for another reason. The four condition columns sum to assets verified.


Most assets were in use; broken assets were the smaller share

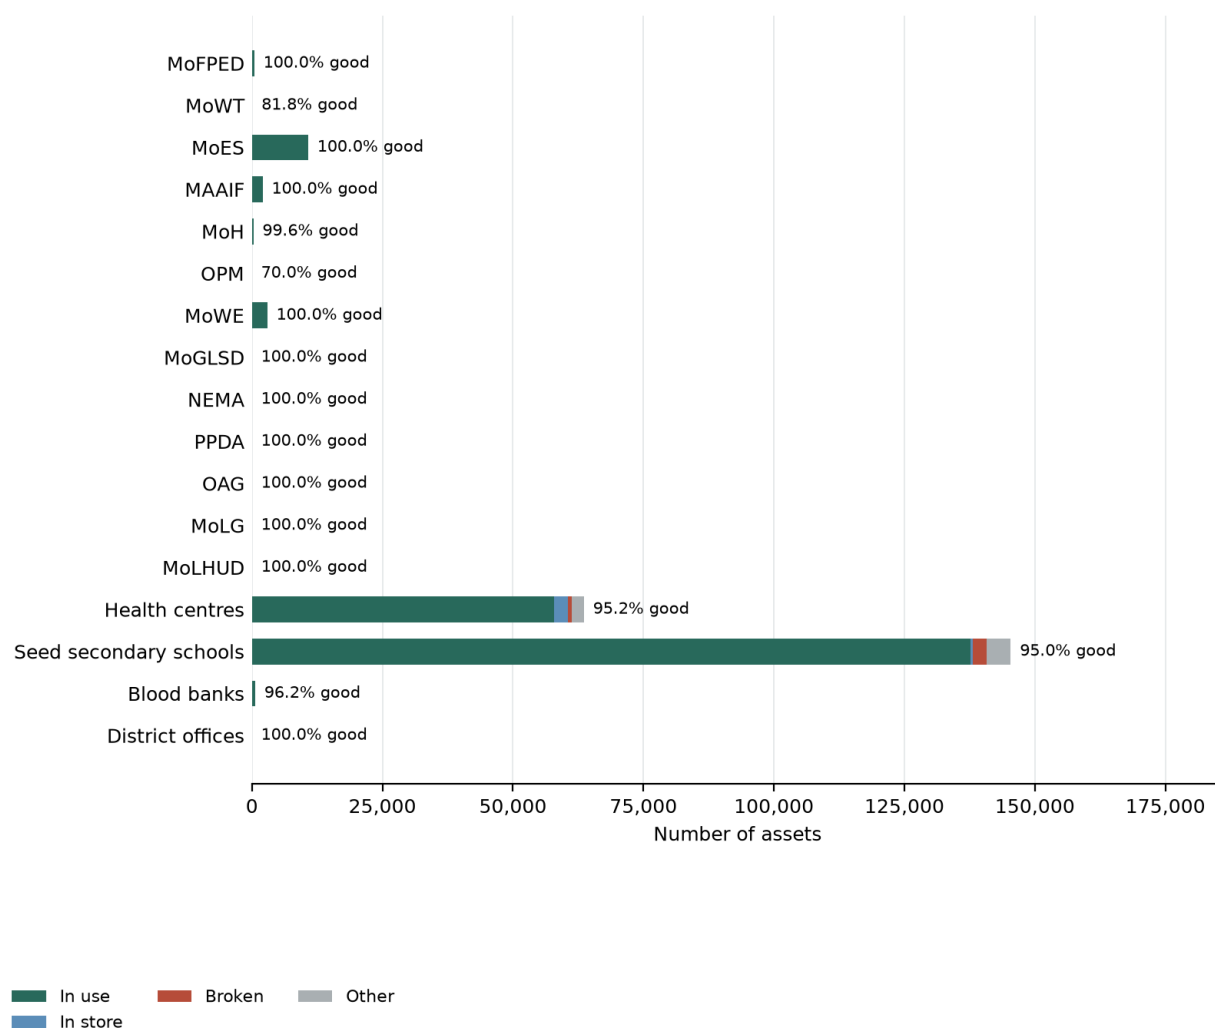

Source: UgIFT asset verification records.

Figure 2: Most assets were in use; broken assets were the smaller share

Share of assets in good condition by institution

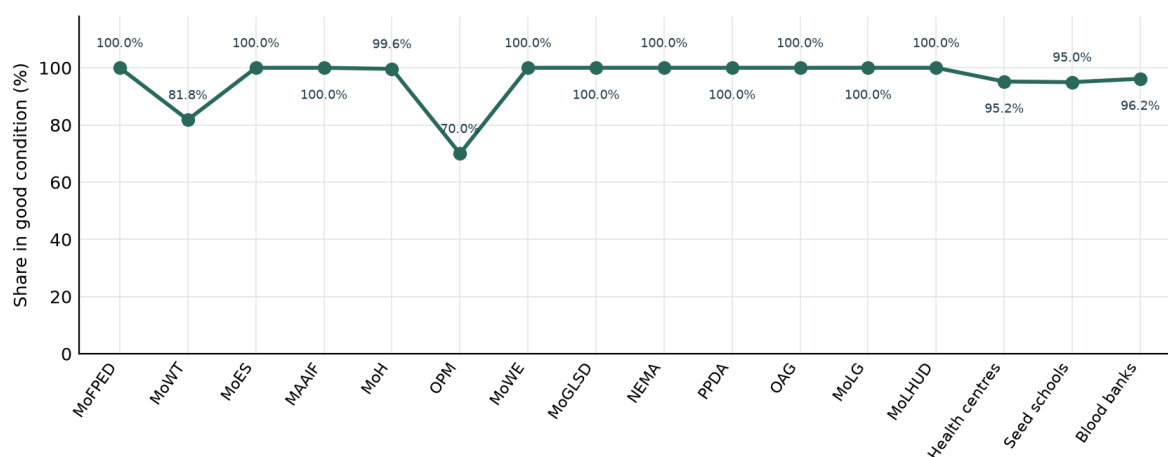

Source: UgIFT asset verification records.

Figure 3: Share of assets in good condition by institution



Figure 4: Delivery bed with a torn mattress cover at a health centre, Busia District (Bukedi)



Figure 5: Damaged drip stand at a health centre, Moroto District (Karamoja)



Figure 6: Broken desk frame at a seed secondary school, Namisindwa District (Bugisu)



Figure 7: Stacked desks, chairs and stools, some recorded as broken and none engraved, at Napak Seed Secondary School, Napak District (Karamoja)



Figure 8: Cracked health centre block above collapsed ground, Bulambuli District (Bugisu)



Figure 9: Water tank on a cracked base at a seed secondary school, Kibuku District (Bukedi)



Figure 10: Stained and peeling ceiling at a health centre, Sironko District (Bugisu)



Figure 11: Flood-affected older health facility at Butiaba, Buliisa District (Bunyoro)



Figure 12: Desktop computers, a printer and UPS units still boxed in the store at Lungulu Seed Secondary School, Nwoya District (Acholi), awaiting a power connection for installation



Figure 13: Largely empty ICT and library block with a few chairs and items kept in one corner at Iriiri Seed Secondary School, Napak District (Karamoja), not yet in use while the school remained with the contractor



Figure 14: HP computer sets stacked in store with cables still bundled and not installed at Bumufuni Seed Secondary School, Bulambuli District (Bugisu)

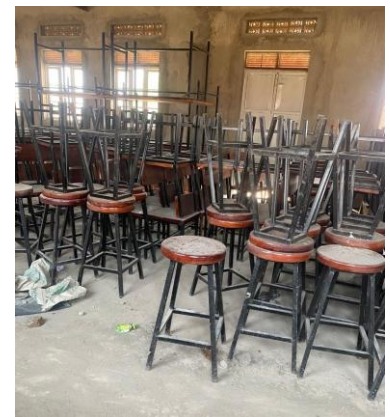


Figure 15: Laboratory stools and desks stored and not yet in use at Butungama Seed Secondary School, Ntoroko District (Tooro), where the school buildings were still under construction



Figure 16: Boxed projector, air conditioner and other equipment in store at King Solomon Seed Secondary School, Kagadi District (Bunyoro), kept boxed because the school was still under construction



Figure 17: Chairs, desks and laboratory stools stacked in a hall at King Solomon Seed Secondary School, Kagadi District (Bunyoro), where most assets remained in storage because the school was still under construction



Figure 18: Clinical equipment kept in store among cartons and not in use at Kihuukya Health Centre III, Hoima City (Bunyoro)



Figure 19: Boxed handheld pulse oximeters at Kibiri Health Centre III, Makindye-Ssabagabo Municipal Council (Buganda), where equipment was still being arranged after the facility opened on 31 August 2026




Figure 20: Hospital beds and screens stacked in storage at a health centre, Kagadi District (Bunyoro)



Figure 21: Pedal suction unit marked MAJANJI H/C III still in its packing, recorded as not in use for lack of technical knowledge, Majanji Health Centre III, Busia District (Bukedi)

Figure 22 groups the stated reasons for assets that were not in use. Figure 23 shows the operating constraints facilities named when equipment stood idle.


Breakdowns and storage were the main reasons assets were not in use

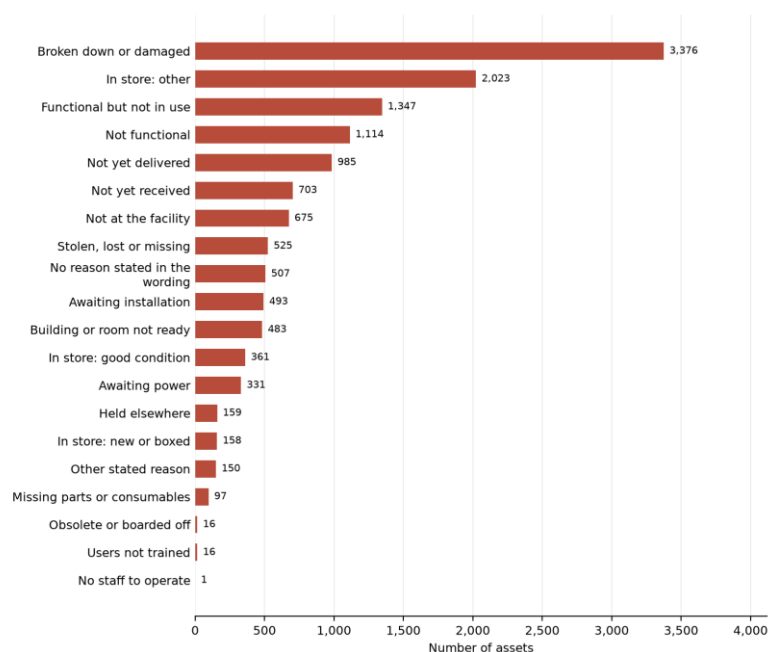

Source: UgIFT asset verification records.

Figure 22: Breakdowns and storage were the main reasons assets were not in use

Power and user skills were the main reasons equipment stood idle

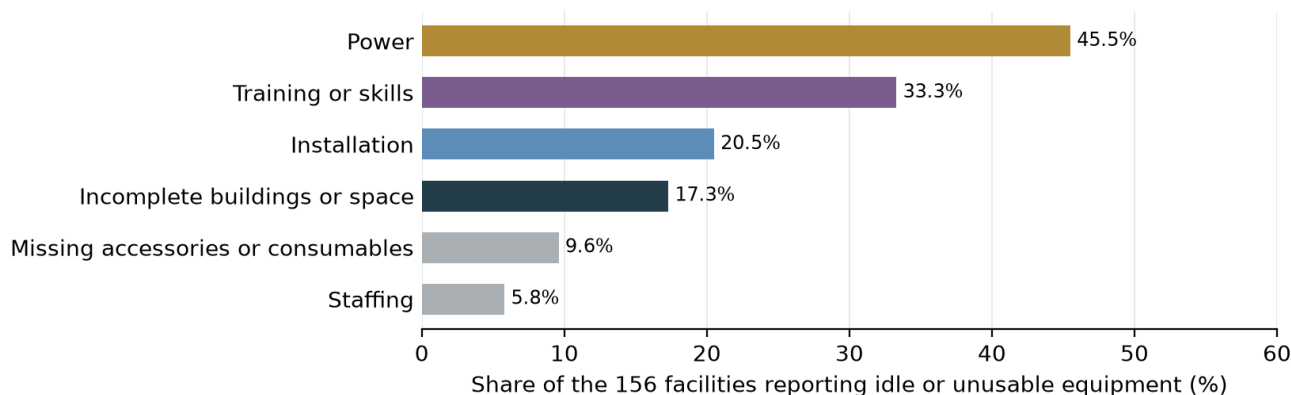

Source: Facility interviews during verification (service delivery question).

Figure 23: Power and user skills were the main reasons equipment stood idle

4.1.3 Identification, including engraving

Of 216,736 movable assets, 49,457 (22.8%) were engraved and 167,279 (77.2%) were not engraved. 23,434 (10.8%) carried the UgIFT marking. Ministries and agencies had engraved 31.5% of their movable assets, seed schools 25.3% and health centres 15.2%. The Ministry of Education and Sports accounts for most of the ministry assets that were not engraved: the TELA handsets and tablets carry no engraving. Table 7 and Figure 24 give the group comparison.

Table 7: Identification of verified assets by institution group

Institution	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
Ministries and agencies	16,668	15,385	4,843 (31.5%)	4,730 (30.7%)	10,542 (68.5%)
Blood banks	626	605	43 (7.1%)	26 (4.3%)	562 (92.9%)
Health centres	63,606	62,071	9,446 (15.2%)	3,817 (6.1%)	52,625 (84.8%)
Seed secondary schools	145,376	138,671	35,121 (25.3%)	14,861 (10.7%)	103,550 (74.7%)
Total	226,276	216,732	49,453 (22.8%)	23,434 (10.8%)	167,279 (77.2%)

Movable assets exclude buildings, structures and land. Properly engraved means the UgIFT marking. A dash means the assets are identified through property and site records rather than engraving.

Most verified movable assets were not engraved

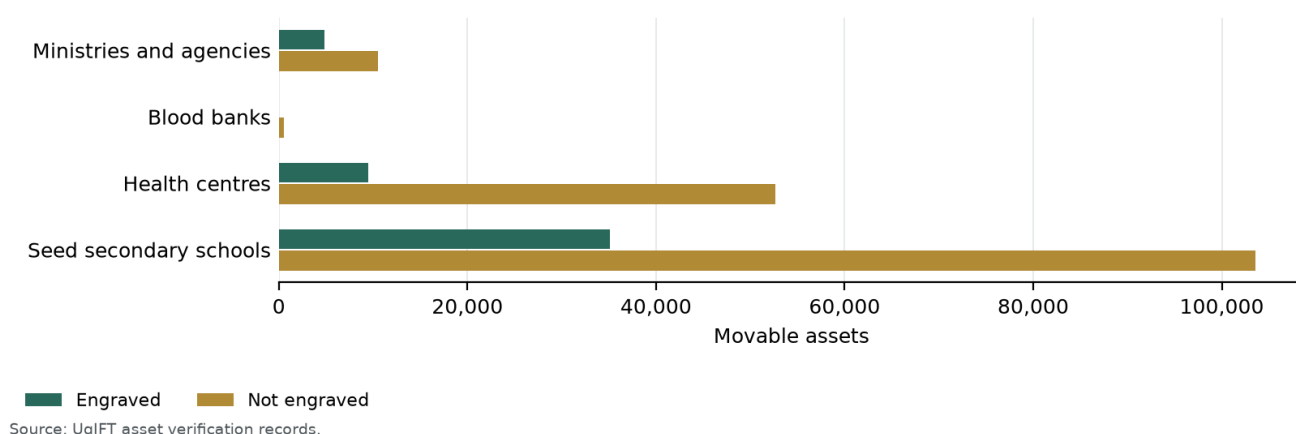


Figure 24: Most verified movable assets were not engraved



Figure 25: Engraving reading GOU/MOH-UGIFT PROJECT FY/2023/2024 on a desk at Namwaya Health Centre III, Tororo District (Bukedi)



Figure 26: Engraving reading APESSS MOES/UGIFT/KABE/SPLRS/2023-24/001 on a desk at Aperikira Seed Secondary School, Kaberamaido District (Teso)



Figure 27: Chair engraved UgIFT/ BUDDE SEED S.S M-PHALL CHAIR with a serial number at Budde Seed Secondary School, Butambala District (Buganda)



Figure 28: Chairs engraved BSS UGIFT with serial numbers at Budde Seed Secondary School, Butambala District (Buganda)



Figure 29: Engraving reading GOU/MOH-UGIFT PROJECT F/Y 2023/2024 on a bench at Bududa Health Centre III, Bududa District (Bugisu)



Figure 30: Wheelchair backrest marked GOU/MOH UGIFT-PROJECT. FY2023/2024 at Kalemungole Health Centre III, Moroto District (Karamoja)



Figure 31: Refrigerator marked GOU/MOH-UGIFT PROJECT FY2024-2025/01 at Kalemungole Health Centre III, Moroto District (Karamoja)

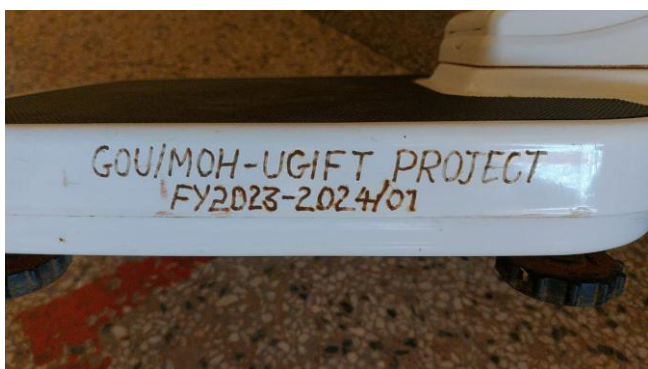


Figure 32: Engraving reading GOU/MOH-UGIFT PROJECT FY2023-2024/01 on a weighing scale at Kalemungole Health Centre III, Moroto District (Karamoja)



Figure 33: Engraving reading GOU/MOH-UGIFT PROJECT FY2023-2024/01 on a delivery bed at Kalemungole Health Centre III, Moroto District (Karamoja)



Figure 34: Engraving reading GOU/MOH-UGIFT PROJECT FY/2023/2024 on a table at Kamoru Health Centre III, Kotido District (Karamoja)



Figure 35: Engraving reading KDLG-UGFIT/HLTH/MAT/ODT/003 on a table at Kyabasara Health Centre III, Kagadi District (Bunyoro)



Figure 36: Classroom desks marked RUPA SEED with serial numbers, without a UgIFT marking, at Rupa Seed School, Moroto District (Karamoja)



Figure 37: Engraving reading KWN/MED-EQ/MOYOK HCIII on a steel cupboard at Moyok Health Centre III, Kween District (Sebei)



Figure 38: Engraving reading KING SOLOMON SEED SECONDARY SCHOOL, without a UgIFT marking, on furniture at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 39: Microscope marked KAMORU HC III by hand at Kamoru Health Centre III, Kotido District (Karamoja)



Figure 40: Hand-scratched marking beginning Bumugibole on a wheelchair armrest at Bumugibole Health Centre III, Bulambuli District (Bugisu)

4.1.4 Financial aspects

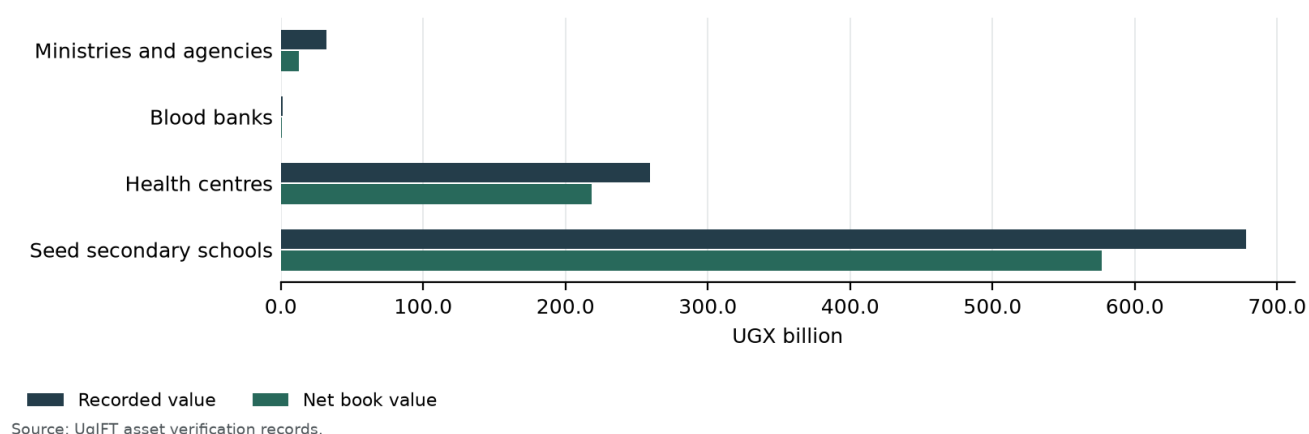
The 226,280 assets carry a recorded value of UGX 971,615,425,138 and a net book value of UGX 808,621,845,836 at 30 September 2026. Seed schools hold 69.8% of the recorded value and health centres 26.7%, mainly in buildings. Ministries and agencies hold UGX 31,822,306,095 (3.3%) and the blood banks UGX 1,451,584,715. Net book value is 85.0% of recorded value at seed schools and 84.1% at health centres, against 39.1% at the ministries and agencies. Table 8 and Figure 41 show the comparison.

Table 8: Recorded value and net book value by institution group

Institution	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
Ministries and agencies	16,668	31,822,306,095	19,372,809,078	12,449,497,017
Blood banks	626	1,451,584,715	514,105,544	937,479,171
Health centres	63,606	259,662,849,164	41,291,859,808	218,378,252,366
Seed secondary schools	145,376	678,247,549,426	101,549,907,057	576,704,905,370
Total	226,276	971,184,289,400	162,728,681,487	808,470,133,924

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Seed schools and health centres hold most of the recorded value

**Figure 41: Seed schools and health centres hold most of the recorded value**

4.2 Ministries, departments and agencies


4.2.1 Availability of the assets

This part counts the assets verified. MoFPED held 458 assets (2.7%). Table 9 and Figure 42 give the full count.

Table 9: Availability of assets: Ministries, departments and agencies

Institution	Assets verified	Share
MoFPED	458	2.7%
MoWT	88	0.5%
MoES	10,783	64.7%
MAAIF	2,045	12.3%
MoH	264	1.6%
OPM	10	0.1%
MoWE	2,939	17.6%
MoGLSD	10	0.1%
NEMA	6	0.0%
PPDA	5	0.0%
OAG	20	0.1%
MoLG	13	0.1%
MoLHUD	27	0.2%
Total	16,668	100.0%

Assets verified: Ministries, departments and agencies

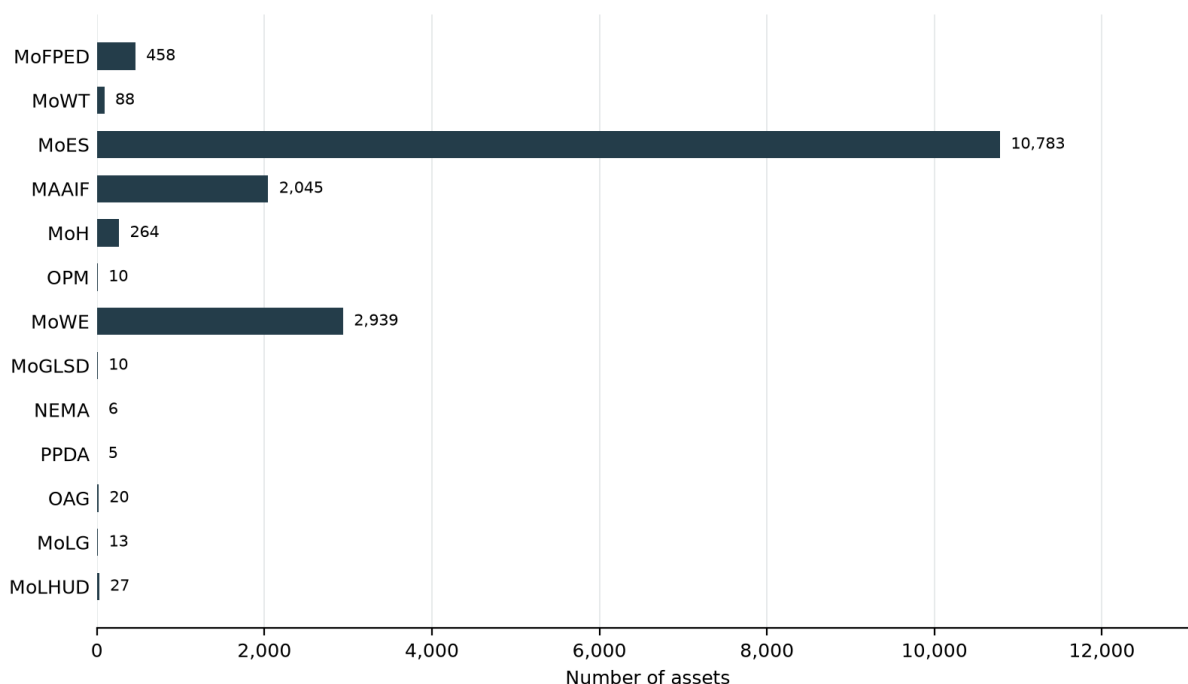

Source: UgIFT asset verification records.

Figure 42: Assets verified: Ministries, departments and agencies

4.2.2 Condition of assets

16,648 assets (99.9%) were in good condition, of which 16,648 were in use and 0 were in store. 4 (0.0%) were broken and 16 (0.1%) were not in use for another reason. The lowest share in good condition was OPM at 70.0%. Table 10 states the counts and Figure 43 shows the split.

The Ministry of Education and Sports holds 10,783 of these assets, mainly TELA handsets and tablets, all recorded in use. The Ministry of Works and Transport was tracing 12 desktop computers and 4 UPS units. Three laptops at the Office of the Prime Minister were damaged. LGFC and MoPS received no UgIFT assets.


Table 10: Condition of assets: Ministries, departments and agencies

Institution	Assets verified	Good condition		Broken	Other
		In use	In store		
MoFPED	458	458	0	0	0
MoWT	88	72	0	0	16
MoES	10,783	10,783	0	0	0
MAAIF	2,045	2,045	0	0	0
MoH	264	263	0	1	0
OPM	10	7	0	3	0
MoWE	2,939	2,939	0	0	0
MoGLSD	10	10	0	0	0
NEMA	6	6	0	0	0
PPDA	5	5	0	0	0
OAG	20	20	0	0	0

Institution	Assets verified	Good condition		Broken	Other
		In use	In store		
MoLG	13	13	0	0	0
MoLHUD	27	27	0	0	0
Total	16,668	16,648	0	4	16

Good condition is assets in use plus assets in store. Broken assets are counted on their own, including broken assets found in store. Other assets are not in use for another reason. The four condition columns sum to assets verified.

Good condition, broken and other assets: Ministries, departments and agencies

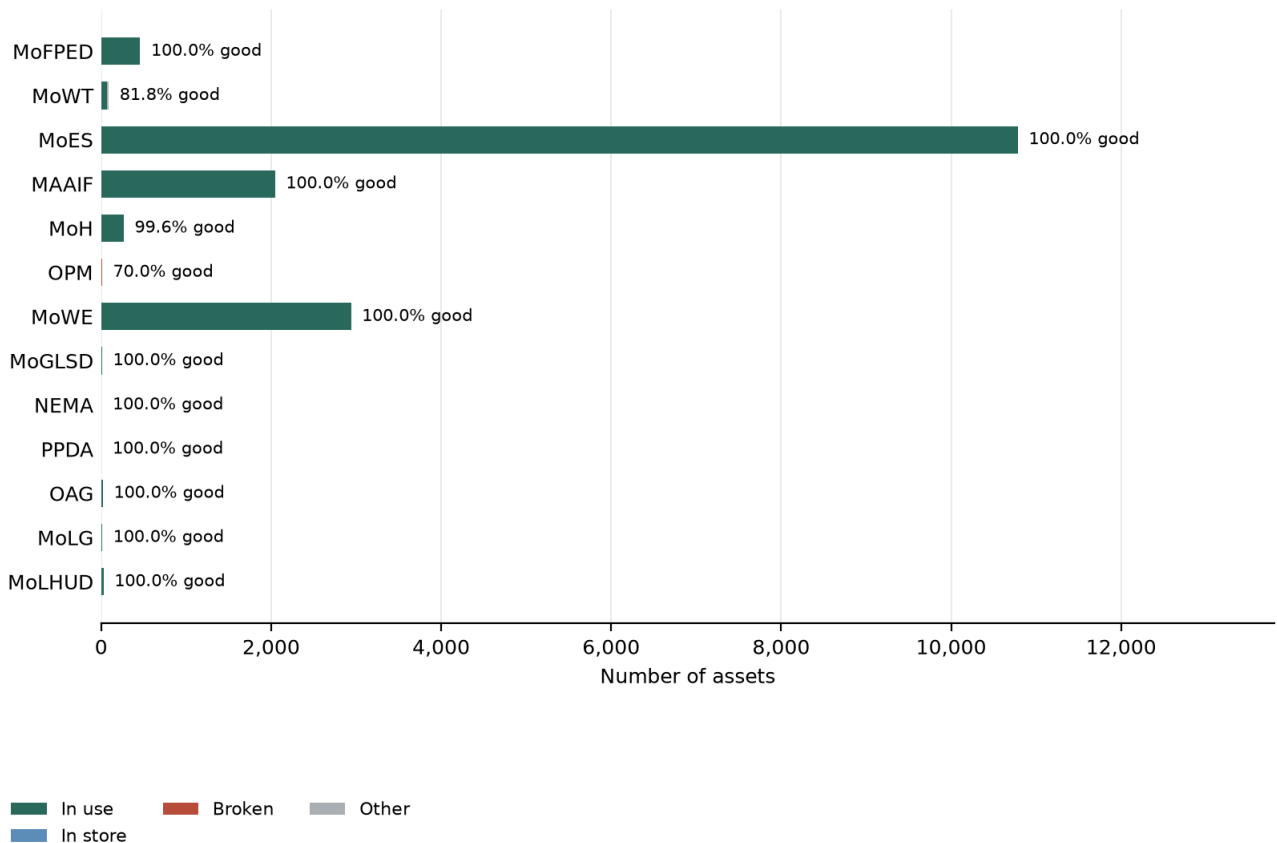

Source: UglIFT asset verification records.

Figure 43: Good condition, broken and other assets: Ministries, departments and agencies

4.2.3 Identification, including engraving

Of 15,385 movable assets, 4,843 (31.5%) were engraved and 10,542 (68.5%) were not engraved. 4,730 (30.7%) carried the UglIFT marking and 113 (0.7%) carried another marking only. Table 11 and Figure 44 set this out.

Table 11: Identification of assets: Ministries, departments and agencies

Institution	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
MoFPED	458	358	272 (76.0%)	252 (70.4%)	86 (24.0%)
MoWT	88	72	63 (87.5%)	62 (86.1%)	9 (12.5%)
MoES	10,783	10,783	458 (4.2%)	458 (4.2%)	10,325 (95.8%)
MAAIF	2,045	1,227	1,204 (98.1%)	1,200 (97.8%)	23 (1.9%)
MoH	264	73	41 (56.2%)	14 (19.2%)	32 (43.8%)
OPM	10	10	10 (100.0%)	10 (100.0%)	0 (0.0%)
MoWE	2,939	2,782	2,740 (98.5%)	2,707 (97.3%)	42 (1.5%)

Institution	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
MoGLSD	10	10	8 (80.0%)	8 (80.0%)	2 (20.0%)
NEMA	6	6	1 (16.7%)	1 (16.7%)	5 (83.3%)
PPDA	5	5	5 (100.0%)	5 (100.0%)	0 (0.0%)
OAG	20	20	20 (100.0%)	6 (30.0%)	0 (0.0%)
MoLG	13	13	8 (61.5%)	7 (53.8%)	5 (38.5%)
MoLHUD	27	26	13 (50.0%)	0 (0.0%)	13 (50.0%)
Total	16,668	15,385	4,843 (31.5%)	4,730 (30.7%)	10,542 (68.5%)

Movable assets exclude buildings, structures and land. Properly engraved means the UgIFT marking. A dash means the assets are identified through property and site records rather than engraving.

Engraved and not engraved movable assets: Ministries, departments and agencies

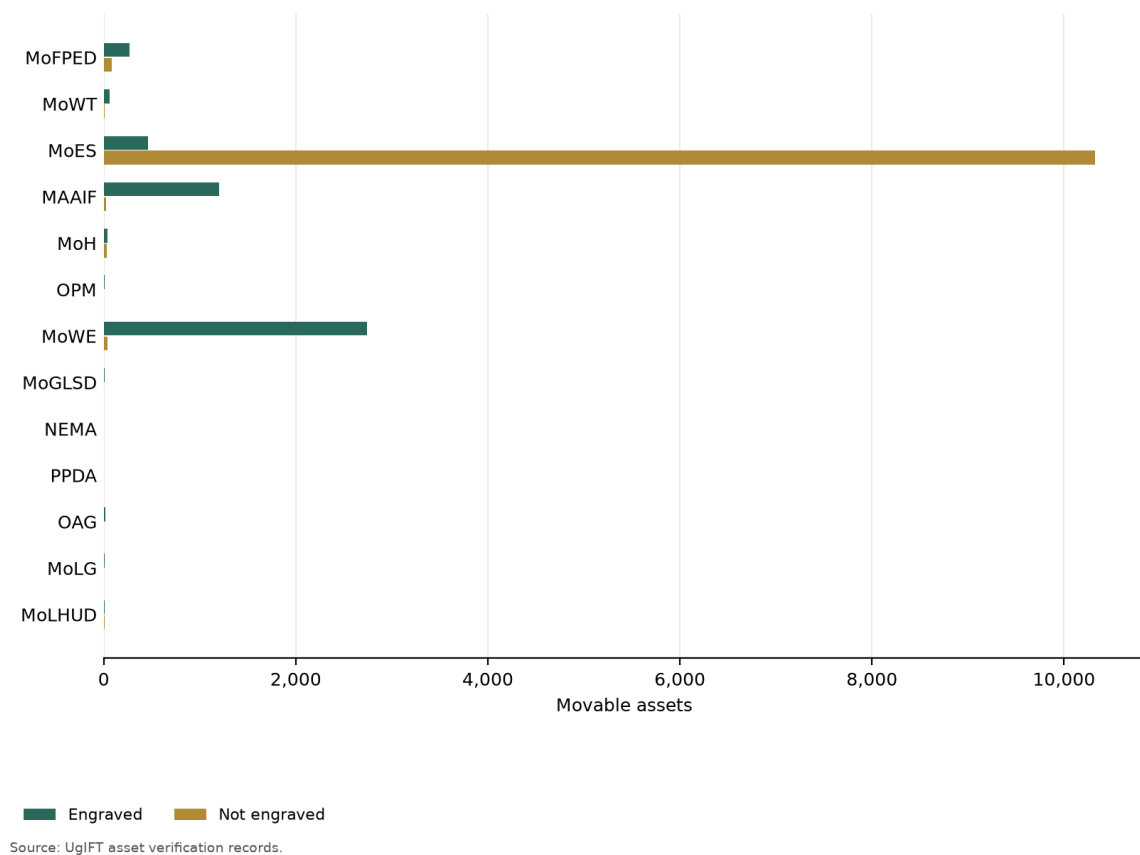


Figure 44: Engraved and not engraved movable assets: Ministries, departments and agencies

4.2.4 Financial aspects

Recorded value was UGX 31,822,306,095 and net book value at 30 September 2026 was UGX 12,449,497,017. Accumulated depreciation was UGX 19,372,809,078. Table 12 and Figure 45 give the figures.

Table 12: Recorded value and net book value: Ministries, departments and agencies

Institution	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
MoFPED	458	6,152,854,000	4,272,041,257	1,880,812,743
MoWT	88	455,932,376	326,484,882	129,447,494
MoES	10,783	14,925,128,359	10,607,476,704	4,317,651,655
MAAIF	2,045	2,332,681,629	984,457,129	1,348,224,500

Institution	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
MoH	264	1,216,859,097	463,977,008	752,882,089
OPM	10	53,535,300	48,181,770	5,353,530
MoWE	2,939	5,000,313,297	2,089,906,834	2,910,406,463
MoGLSD	10	46,180,000	13,660,000	32,520,000
NEMA	6	46,824,409	32,841,273	13,983,136
PPDA	5	30,153,500	13,066,516	17,086,984
OAG	20	388,773,680	111,591,545	277,182,135
MoLG	13	343,320,450	284,804,160	58,516,290
MoLHUD	27	829,749,997	124,320,000	705,429,997
Total	16,668	31,822,306,094	19,372,809,078	12,449,497,016

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Recorded value and net book value: Ministries, departments and agencies

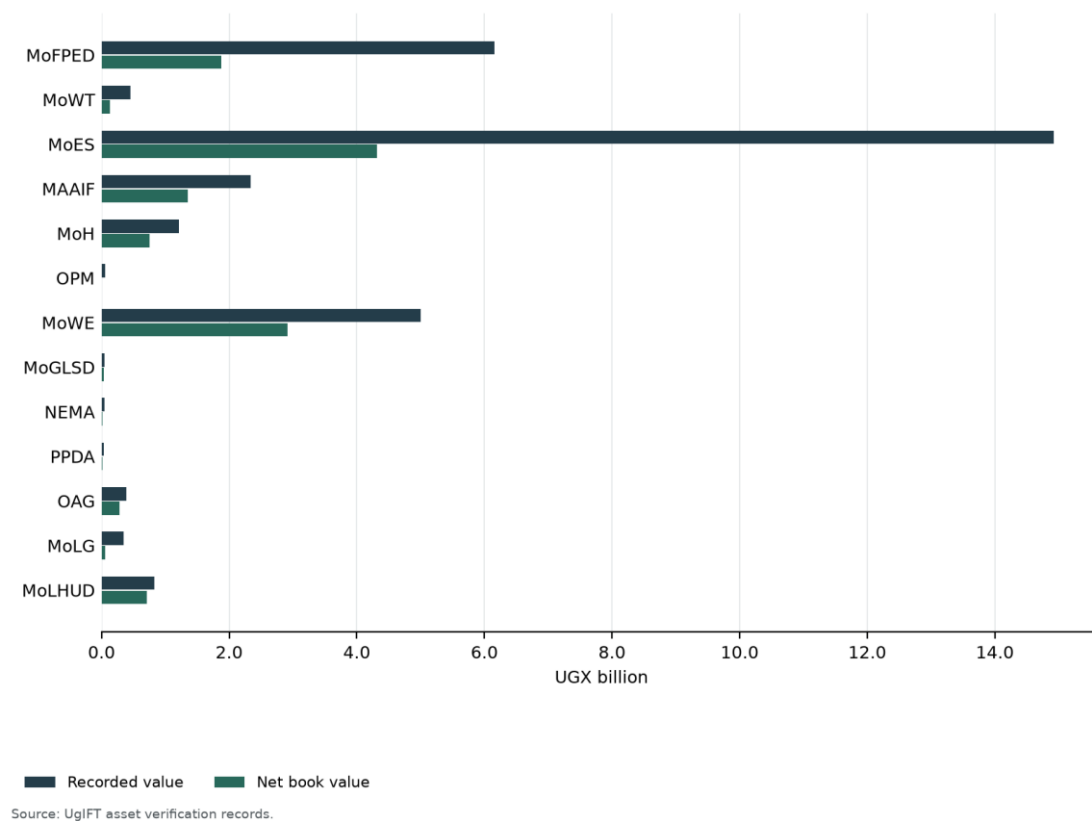


Figure 45: Recorded value and net book value: Ministries, departments and agencies


4.3 Health centres

4.3.1 Availability of the assets

This part counts the assets verified. Clinical equipment held 25,960 assets (40.8%). Table 13 and Figure 46 give the full count.

Table 13: Availability of assets: Health centres

Asset category	Assets verified	Share
Clinical equipment	25,960	40.8%
Clinical furniture	20,139	31.7%
Maternity ward equipment	7,438	11.7%
ICT equipment	410	0.6%
Health centre buildings	1,525	2.4%
Other health centre assets	8,134	12.8%
Total	63,606	100.0%

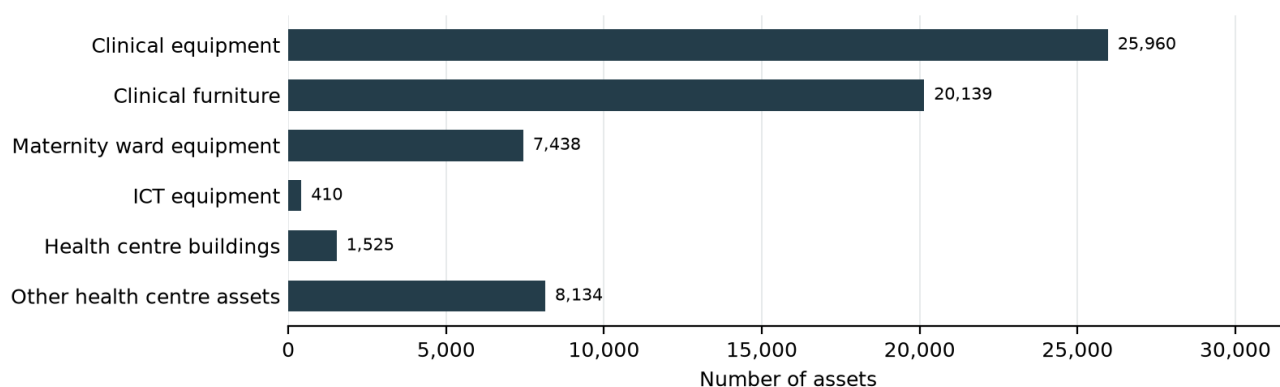Assets verified: Health centres

Source: UgIFT asset verification records.

Figure 46: Assets verified: Health centres**4.3.2 Condition of assets**

60,550 assets (95.2%) were in good condition, of which 57,921 were in use and 2,629 were in store. 660 (1.0%) were broken and 2,396 (3.8%) were not in use for another reason. The lowest share in good condition was ICT equipment at 89.3%. Table 14 states the counts and Figure 47 shows the split.

Clinical equipment is the largest equipment group and also the group with the most assets in store. Health centre buildings split into 482 residential and 1,043 non-residential assets (Table 17 and Figure 50). Residential buildings are staff houses and other buildings described as residential.

Table 14: Condition of assets: Health centres

Asset category	Assets verified	Good condition		Broken	Other
		In use	In store		
Clinical equipment	25,960	22,507	1,677	220	1,556
Clinical furniture	20,139	19,110	360	277	392
Maternity ward equipment	7,438	6,918	303	69	148
ICT equipment	410	361	5	5	39
Health centre buildings	1,525	1,495	0	6	24
Other health centre assets	8,134	7,530	284	83	237
Total	63,606	57,921	2,629	660	2,396

Good condition is assets in use plus assets in store. Broken assets are counted on their own, including broken assets found in store. Other assets are not in use for another reason. The four condition columns sum to assets verified.

Good condition, broken and other assets: Health centres

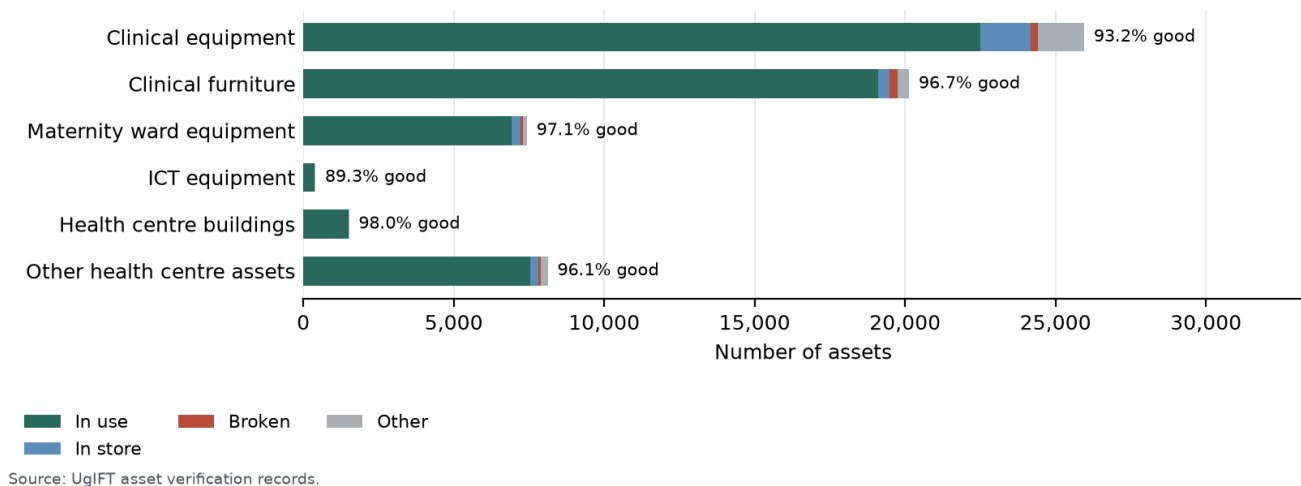


Figure 47: Good condition, broken and other assets: Health centres

4.3.3 Identification, including engraving

Of 62,071 movable assets, 9,446 (15.2%) were engraved and 52,625 (84.8%) were not engraved. 3,817 (6.1%) carried the UgIFT marking and 5,629 (9.1%) carried another marking only. Table 15 and Figure 48 set this out.

Table 15: Identification of assets: Health centres

Asset category	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
Clinical equipment	25,960	25,960	2,815 (10.8%)	1,043 (4.0%)	23,145 (89.2%)
Clinical furniture	20,139	20,139	3,934 (19.5%)	1,576 (7.8%)	16,205 (80.5%)
Maternity ward equipment	7,438	7,438	1,510 (20.3%)	815 (11.0%)	5,928 (79.7%)
ICT equipment	410	410	155 (37.8%)	133 (32.4%)	255 (62.2%)
Health centre buildings	1,525	-	-	-	-
Other health centre assets	8,134	8,124	1,032 (12.7%)	250 (3.1%)	7,092 (87.3%)
Total	63,606	62,071	9,446 (15.2%)	3,817 (6.1%)	52,625 (84.8%)

Movable assets exclude buildings, structures and land. Properly engraved means the UgIFT marking. A dash means the assets are identified through property and site records rather than engraving.

Engraved and not engraved movable assets: Health centres

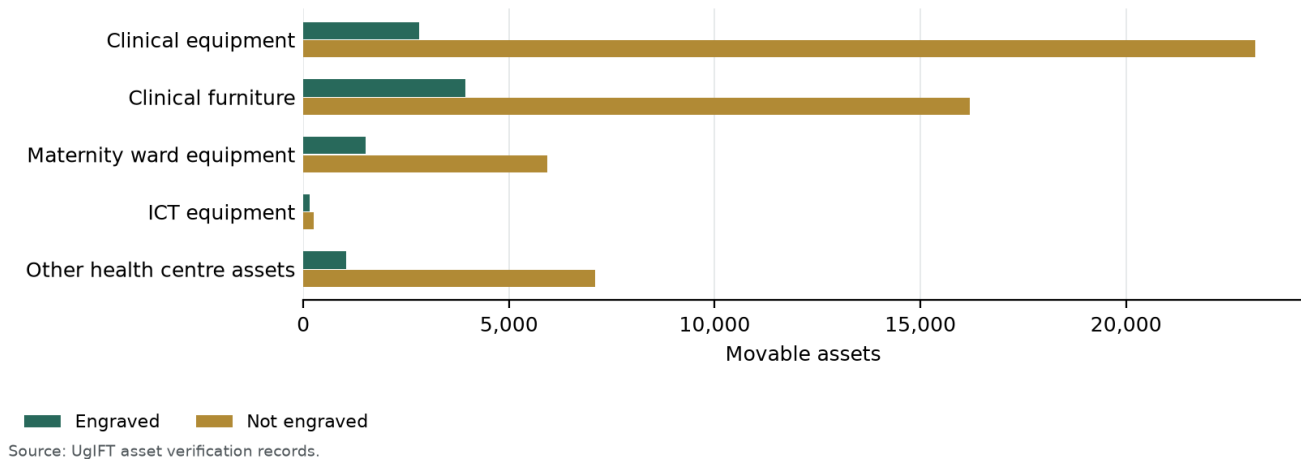


Figure 48: Engraved and not engraved movable assets: Health centres

4.3.4 Financial aspects

Recorded value was UGX 259,662,849,164 and net book value at 30 September 2026 was UGX 218,378,252,366. Accumulated depreciation was UGX 41,291,859,808. Table 16 and Figure 49 give the figures.

Table 16: Recorded value and net book value: Health centres

Asset category	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
Clinical equipment	25,960	32,419,253,988	12,264,441,553	20,154,812,435
Clinical furniture	20,139	16,115,597,625	6,920,036,277	9,202,824,358
Maternity ward equipment	7,438	7,419,395,159	3,270,066,317	4,149,328,842
ICT equipment	410	876,467,375	646,446,250	230,021,125
Health centre buildings	1,525	198,198,049,954	17,166,034,514	181,032,015,440
Other health centre assets	8,134	4,634,085,063	1,024,834,897	3,609,250,166
Total	63,606	259,662,849,164	41,291,859,808	218,378,252,366

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Recorded value and net book value: Health centres


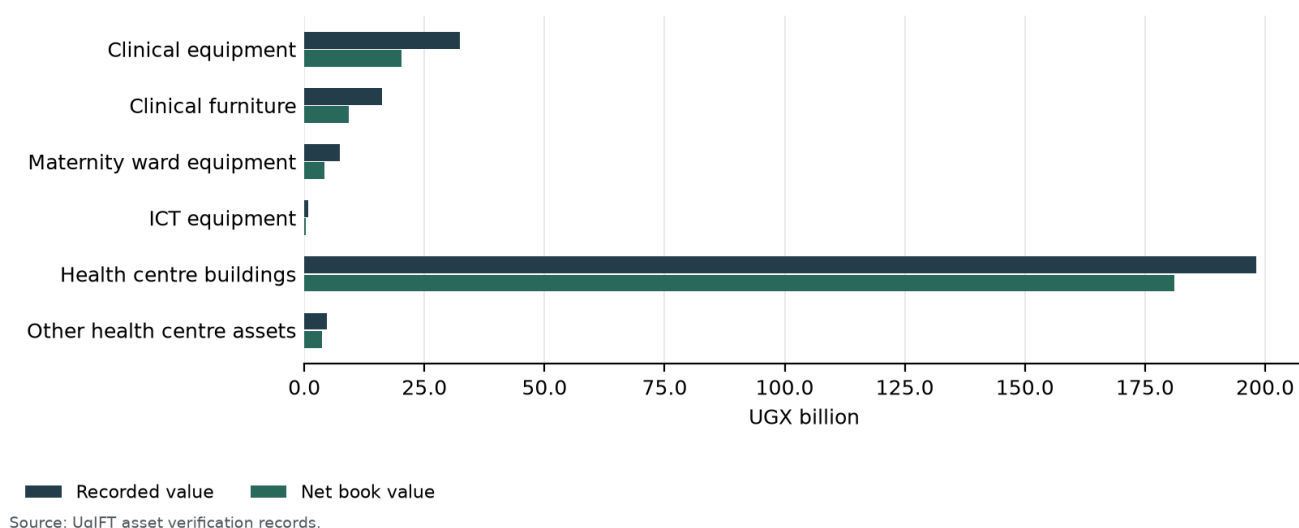


Figure 49: Recorded value and net book value: Health centres

Table 17: Health centre buildings: residential and non-residential

Building type	Assets verified	Share
Residential buildings	482	31.6%
Non-residential buildings	1,043	68.4%
Total	1,525	100.0%

Most health centre buildings are non-residential

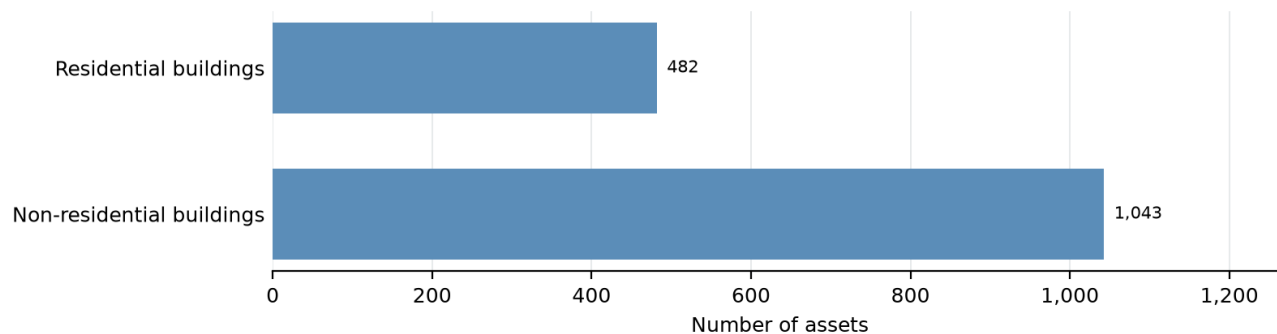

Source: UgIFT asset verification records.

Figure 50: Most health centre buildings are non-residential

4.4 Seed secondary schools


4.4.1 Availability of the assets

This part counts the assets verified. School buildings held 4,341 assets (3.0%). Table 18 and Figure 51 give the full count.

Table 18: Availability of assets: Seed secondary schools

Asset category	Assets verified	Share
School buildings	4,341	3.0%
Water facilities	594	0.4%
School furniture	109,646	75.4%
Computers and related equipment	10,266	7.1%
ICT equipment	1,503	1.0%
Other school assets	19,026	13.1%
Total	145,376	100.0%

Assets verified: Seed secondary schools

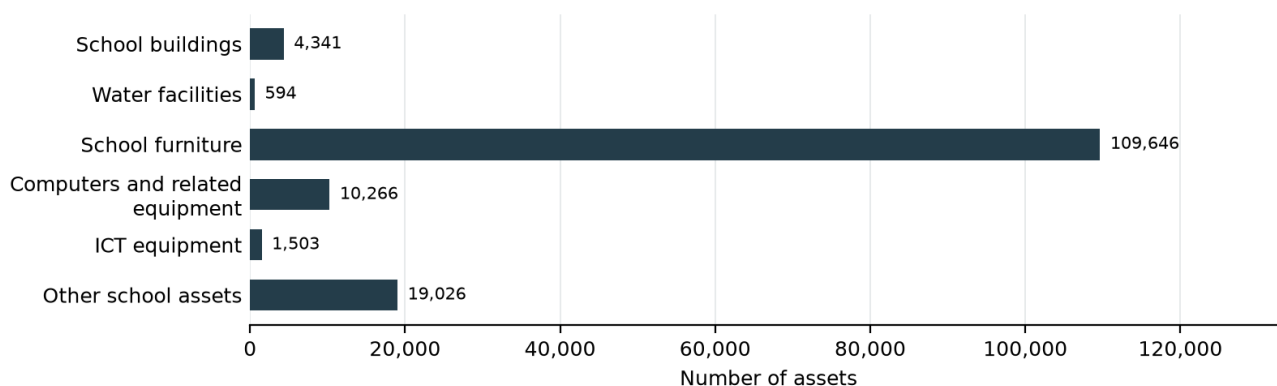

Source: UgIFT asset verification records.

Figure 51: Assets verified: Seed secondary schools

4.4.2 Condition of assets

138,075 assets (95.0%) were in good condition, of which 137,585 were in use and 490 were in store. 2,722 (1.9%) were broken and 4,579 (3.1%) were not in use for another reason. The lowest share in good condition was Computers and related equipment at 88.4%. Table 19 states the counts and Figure 52 shows the split.


School furniture is the largest category, at 109,646 assets. Of the furniture, desks, tables, chairs and stools account for 101,453, and 2,455 furniture assets were broken. Computers and related equipment had 85.5% in use. School buildings split into 577 residential and 3,764 non-residential, and water facilities are reported separately (Table 22 and Figure 55).

Table 19: Condition of assets: Seed secondary schools

Asset category	Assets verified	Good condition		Broken	Other
		In use	In store		
School buildings	4,341	4,238	3	14	86
Water facilities	594	560	0	15	19
School furniture	109,646	104,233	0	2,455	2,958
Computers and related equipment	10,266	8,777	301	208	980
ICT equipment	1,503	1,395	30	11	67
Other school assets	19,026	18,382	156	19	469
Total	145,376	137,585	490	2,722	4,579

Good condition is assets in use plus assets in store. Broken assets are counted on their own, including broken assets found in store. Other assets are not in use for another reason. The four condition columns sum to assets verified.

Good condition, broken and other assets: Seed secondary schools

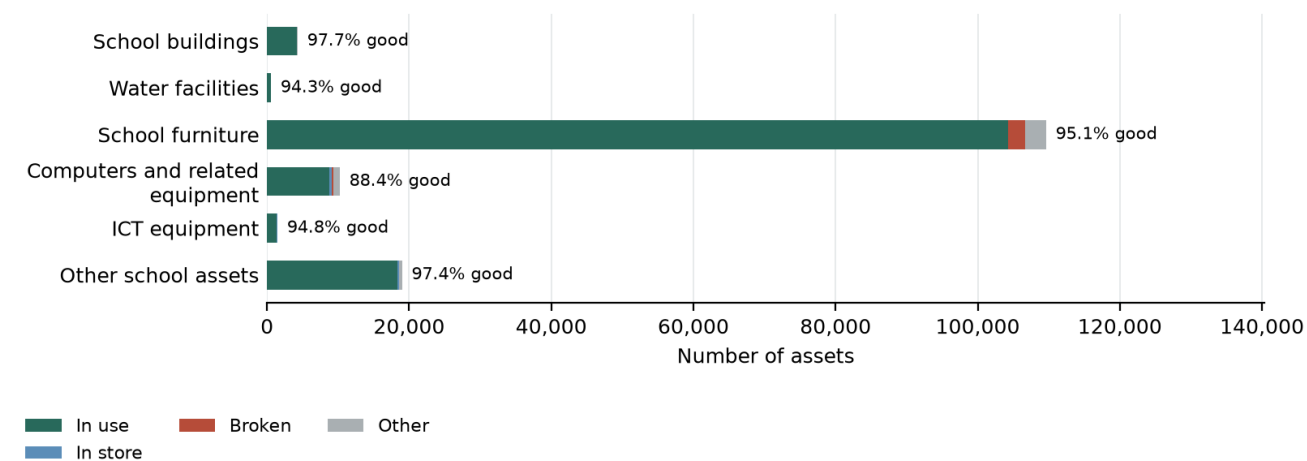

Source: UgIFT asset verification records.

Figure 52: Good condition, broken and other assets: Seed secondary schools

4.4.3 Identification, including engraving

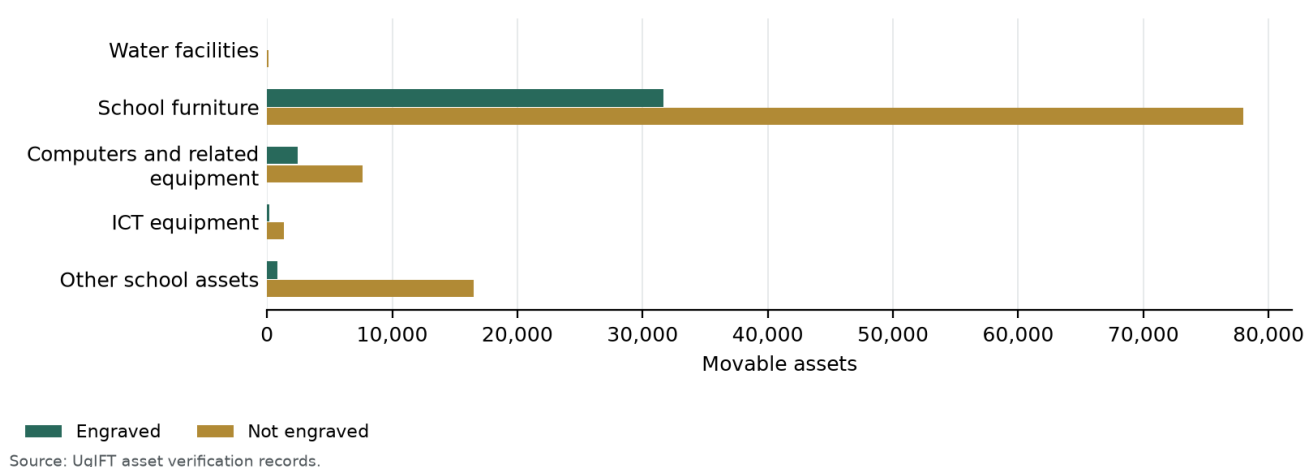
Of 138,671 movable assets, 35,121 (25.3%) were engraved and 103,550 (74.7%) were not engraved. 14,861 (10.7%) carried the UgIFT marking and 20,260 (14.6%) carried another marking only. Table 20 and Figure 53 set this out.

Table 20: Identification of assets: Seed secondary schools

Asset category	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
School buildings	4,341	-	-	-	-
Water facilities	594	96	0 (0.0%)	0 (0.0%)	96 (100.0%)
School furniture	109,646	109,646	31,656 (28.9%)	14,405 (13.1%)	77,990 (71.1%)
Computers and related equipment	10,266	10,059	2,445 (24.3%)	310 (3.1%)	7,614 (75.7%)
ICT equipment	1,503	1,503	169 (11.2%)	5 (0.3%)	1,334 (88.8%)
Other school assets	19,026	17,367	851 (4.9%)	141 (0.8%)	16,516 (95.1%)
Total	145,376	138,671	35,121 (25.3%)	14,861 (10.7%)	103,550 (74.7%)

Movable assets exclude buildings, structures and land. Properly engraved means the UgIFT marking. A dash means the assets are identified through property and site records rather than engraving.

Engraved and not engraved movable assets: Seed secondary schools

**Figure 53: Engraved and not engraved movable assets: Seed secondary schools**

4.4.4 Financial aspects

Recorded value was UGX 678,247,549,426 and net book value at 30 September 2026 was UGX 576,704,905,370. Accumulated depreciation was UGX 101,549,907,057. Table 21 and Figure 54 give the figures.

Table 21: Recorded value and net book value: Seed secondary schools

Asset category	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
School buildings	4,341	495,160,116,359	54,728,357,865	440,431,758,495
Water facilities	594	3,076,630,427	817,399,552	2,259,230,875
School furniture	109,646	94,322,583,307	18,004,437,908	76,325,408,399
Computers and related equipment	10,266	25,434,940,136	13,385,662,572	12,049,277,564
ICT equipment	1,503	3,790,186,812	2,174,847,712	1,615,339,100
Other school assets	19,026	56,463,092,385	12,439,201,448	44,023,890,937
Total	145,376	678,247,549,426	101,549,907,057	576,704,905,370

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Recorded value and net book value: Seed secondary schools

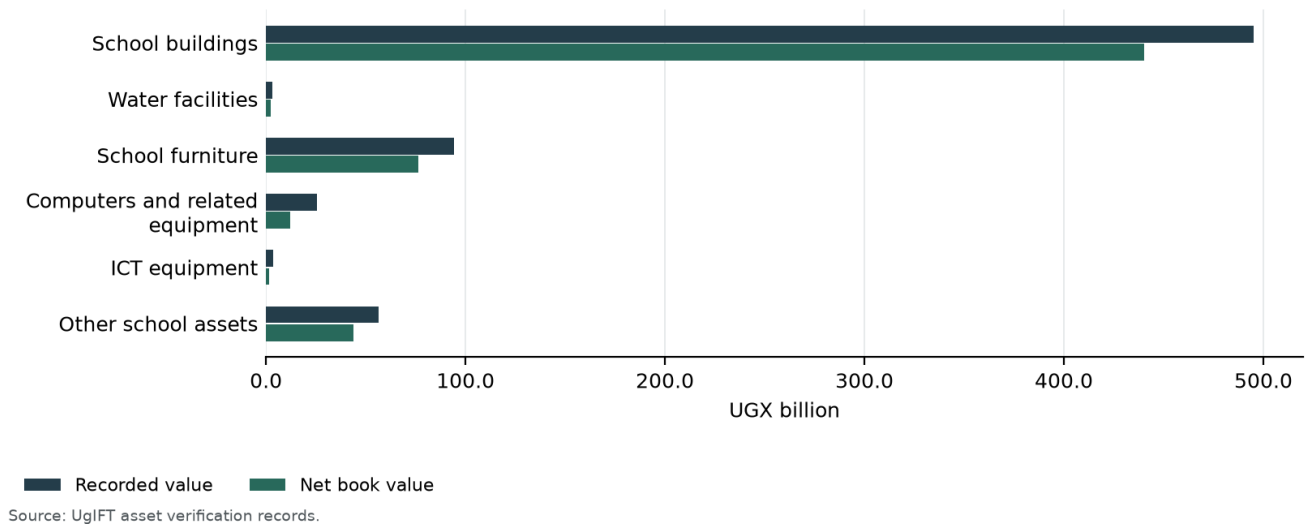


Figure 54: Recorded value and net book value: Seed secondary schools

Table 22: School buildings and furniture: composition

Item	Assets verified	Share of buildings and furniture
Residential buildings	577	0.5%
Non-residential buildings	3,764	3.3%
Desks	22,349	19.6%
Tables	16,406	14.4%
Chairs	37,194	32.6%
Stools	25,504	22.4%
Other furniture	8,193	7.2%

Residential buildings are staff houses, staff quarters and dormitories. Water tanks and similar installations are in water facilities, not in buildings. Desks, tables, chairs, stools and other furniture add up to school furniture.

Chairs, stools and desks dominate school furniture



Source: UgIFT asset verification records.

Figure 55: Chairs, stools and desks dominate school furniture

4.5 Blood banks


4.5.1 Availability of the assets

This part counts the assets verified. Arua Regional Blood Bank held 277 assets (44.2%). Table 23 and Figure 56 give the full count.

Table 23: Availability of assets: Blood banks

Institution	Assets verified	Share
Arua Regional Blood Bank	277	44.2%
Hoima Regional Blood Bank	119	19.0%
Soroti Regional Blood Bank	115	18.4%
Uganda Blood Transfusion Services	115	18.4%
Total	626	100.0%

Assets verified: Blood banks

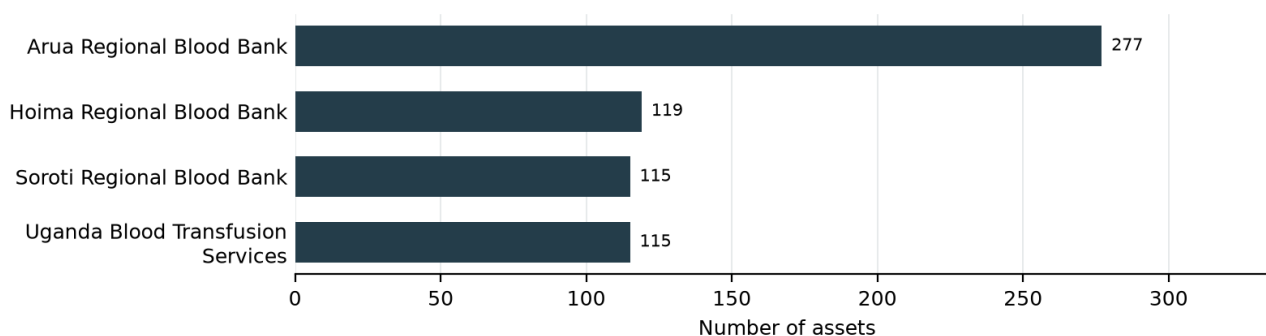

Source: UgIFT asset verification records.

Figure 56: Assets verified: Blood banks

4.5.2 Condition of assets

602 assets (96.2%) were in good condition, of which 602 were in use and 0 were in store. 6 (1.0%) were broken and 18 (2.9%) were not in use for another reason. The lowest share in good condition was Arua Regional Blood Bank at 91.3%. Table 24 states the counts and Figure 57 shows the split.

Table 24: Condition of assets: Blood banks

Institution	Assets verified	Good condition		Broken	Other
		In use	In store		
Arua Regional Blood Bank	277	253	0	6	18
Hoima Regional Blood Bank	119	119	0	0	0
Soroti Regional Blood Bank	115	115	0	0	0
Uganda Blood Transfusion Services	115	115	0	0	0
Total	626	602	0	6	18

Good condition is assets in use plus assets in store. Broken assets are counted on their own, including broken assets found in store. Other assets are not in use for another reason. The four condition columns sum to assets verified.

Good condition, broken and other assets: Blood banks

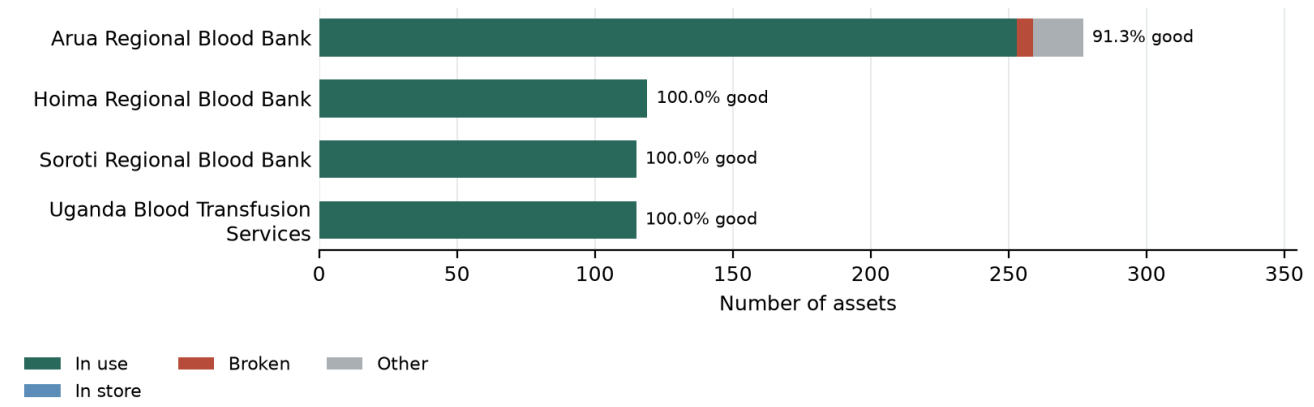


Figure 57: Good condition, broken and other assets: Blood banks

4.5.3 Identification, including engraving

Of 605 movable assets, 43 (7.1%) were engraved and 562 (92.9%) were not engraved. 26 (4.3%) carried the UgIFT marking and 17 (2.8%) carried another marking only. Table 25 and Figure 58 set this out.

Table 25: Identification of assets: Blood banks

Institution	Assets verified	Movable assets	Engraved	Properly engraved	Not engraved
Arua Regional Blood Bank	277	257	43 (16.7%)	26 (10.1%)	214 (83.3%)
Hoima Regional Blood Bank	119	118	0 (0.0%)	0 (0.0%)	118 (100.0%)
Soroti Regional Blood Bank	115	115	0 (0.0%)	0 (0.0%)	115 (100.0%)
Uganda Blood Transfusion Services	115	115	0 (0.0%)	0 (0.0%)	115 (100.0%)
Total	626	605	43 (7.1%)	26 (4.3%)	562 (92.9%)

Movable assets exclude buildings, structures and land. Properly engraved means the UgIFT marking. A dash means the assets are identified through property and site records rather than engraving.

Engraved and not engraved movable assets: Blood banks

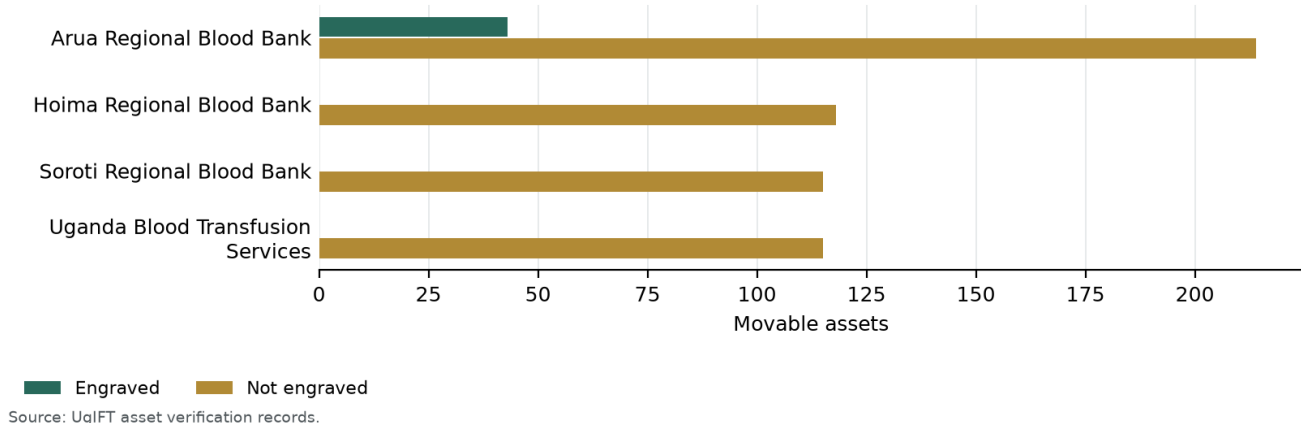


Figure 58: Engraved and not engraved movable assets: Blood banks

4.5.4 Financial aspects

Recorded value was UGX 1,451,584,715 and net book value at 30 September 2026 was UGX 937,479,171. Accumulated depreciation was UGX 514,105,544. Table 26 and Figure 59 give the figures.

Table 26: Recorded value and net book value: Blood banks

Institution	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
Arua Regional Blood Bank	277	1,091,262,791	430,462,000	660,800,791
Hoima Regional Blood Bank	119	278,006,206	21,690,290	256,315,916
Soroti Regional Blood Bank	115	29,317,538	25,122,550	4,194,988
Uganda Blood Transfusion Services	115	52,998,180	36,830,704	16,167,476
Total	626	1,451,584,715	514,105,544	937,479,171

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Recorded value and net book value: Blood banks

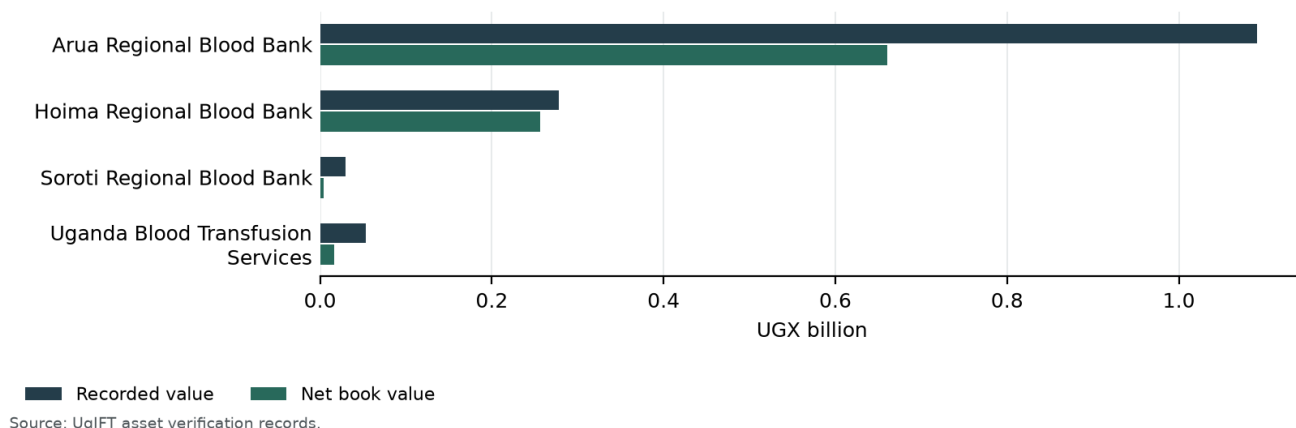


Figure 59: Recorded value and net book value: Blood banks

UgIFT financed the construction of the Arua and Hoima regional blood banks, which were completed and commissioned, and the rehabilitation of Soroti Regional Blood Bank. The photographs show the buildings, donor rooms and cold-chain equipment, and the engraving found on equipment at Arua and Hoima.

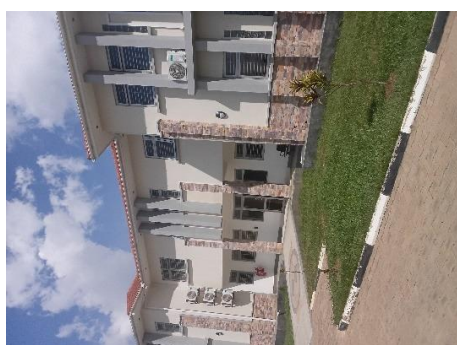


Figure 60: Completed blood bank building at Arua Regional Blood Bank, Arua City (West Nile)



Figure 61: Donor couches in the donor room at Arua Regional Blood Bank, Arua City (West Nile)



Figure 62: Markings PEP II/UBTS/COMP/11/016 and UBTS/UGIFT/ARBB/UPS/001 on uninterruptible power supplies at Arua Regional Blood Bank, Arua City (West Nile)



Figure 63: Blood bank refrigerator at Arua Regional Blood Bank, Arua City (West Nile)



Figure 64: Platelet agitator at Arua Regional Blood Bank, Arua City (West Nile)



Figure 65: Chest freezer at Arua Regional Blood Bank, Arua City (West Nile)



Figure 66: Donor couches in the donor room at Hoima Regional Blood Bank, Hoima City (Bunyoro)



Figure 67: Engraving reading UBTS/UGIFT/VCH/001 on equipment at Hoima Regional Blood Bank, Hoima City (Bunyoro)



Figure 68: Blood collection balance at Hoima Regional Blood Bank, Hoima City (Bunyoro)



Figure 69: Benchtop centrifuge at Hoima Regional Blood Bank, Hoima City (Bunyoro)



Figure 70: Water fire extinguisher at Hoima Regional Blood Bank, Hoima City (Bunyoro)



Figure 71: Generator in an outdoor enclosure at Hoima Regional Blood Bank, Hoima City (Bunyoro)

4.6 Facilities verified, completion and inconsistencies

Sections 4.3 and 4.4 give the assets at health centres and seed schools. This section records which facilities were verified, where works were still outstanding, and how the programme list was reconciled.

Local government verification began on 24 August 2026 and covered the 629 facilities on the programme list, the health centres and seed schools planned before the exercise started: 371 health centres and 258 seed schools (Table 3). Follow-up established which facilities retained their original names, which had replacements or relocated assets, and which listed institutions had not received programme support. These distinctions matter because a name on the list does not, by itself, demonstrate that the intended facility and its assets are available for service.

The findings are reported at national level. Section 4.3.1 shows how many programme-list facilities were verified, completed and providing services; Section 4.3.2 sets out the inconsistencies between the programme list and the facilities found; and Section 4.3.3 presents the assets verified at health centres and seed schools.

4.6.1 Facilities verified, completed and providing services


Of the 629 facilities on the programme list, teams verified 590 (93.8%) on the ground as UgIFT facilities: 347 health centres (93.5%) and 243 seed schools (94.2%). The verified count includes 29 facilities verified under their operating name and three verified through the facility that replaced them. The other 39 facilities (6.2%) were accounted for through reconciliation: 18 were not UgIFT facilities in practice, the UgIFT assets of three had been relocated to another facility, two are counted once under another programme-list entry, and 16 were accounted for through documented follow-up. Every programme-list facility was therefore accounted for through verification or reconciliation. Table 27 and Figure 72 summarise the position.

Table 27: Programme-list facilities verified, completed and providing services

Measure	Health centres	Seed schools	Total
Programme list	371	258	629
Verified	347 (93.5%)	243 (94.2%)	590 (93.8%)
Works completed	320 (92.2%)	155 (63.8%)	475 (80.5%)
Works not completed	27 (7.8%)	88 (36.2%)	115 (19.5%)
Providing services	327 (94.2%)	193 (79.4%)	520 (88.1%)
Not yet providing services	3 (0.9%)	21 (8.6%)	24 (4.1%)
Accounted for through reconciliation	24 (6.5%)	15 (5.8%)	39 (6.2%)

Counts are facilities. Verified and accounted for through reconciliation are percentages of the programme list; the other percentages are of verified facilities.

A third of verified seed schools had works outstanding

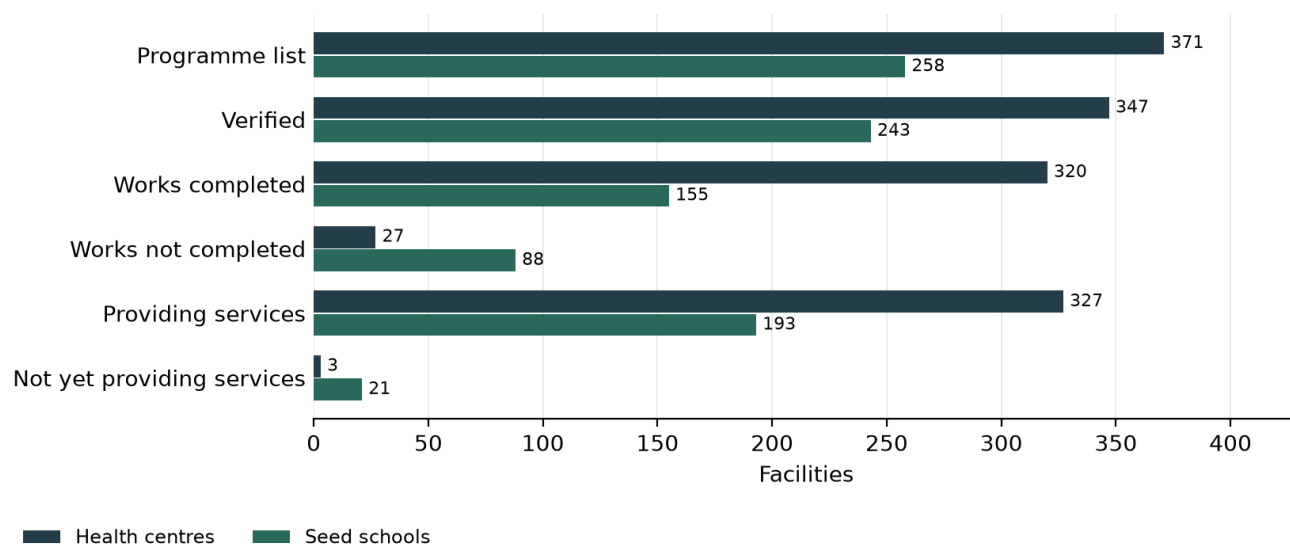

Source: UgIFT programme list, field returns and verification records.

Figure 72: A third of verified seed schools had works outstanding

Works were complete at 475 of the verified facilities (80.5%): 320 health centres (92.2%) and 155 seed schools (63.8%). Works were not complete at 115 (19.5%): 27 health centres (7.8%) and 88 seed schools (36.2%). For 86 of these, the field returns or the building entries in the verification records confirmed that works were outstanding; the other 29 were recorded as ongoing on the programme list. In the field, 44 facilities recorded as complete on the programme list had works outstanding, for example Kaptum and Kitawoi seed schools in Kween, while four recorded as ongoing were found complete.

At 45 of the 86 facilities, main blocks such as classrooms, laboratories, libraries, ICT blocks or maternity wards were still under construction. At 16, only ancillary structures such as staff houses, latrines, kitchens, placenta pits or incinerators remained. At nine, the contractor had not yet handed the works over, and at the other 16 the works were reported as still under construction or incomplete.

At the time of the visits, 520 verified facilities (88.1%) were providing services: 327 health centres (94.2%) and 193 seed schools (79.4%). They include 63 facilities where some works were still outstanding. Twenty-four verified facilities (4.1%) were not yet providing services: three health centres (0.9%) and 21 seed schools (8.6%). Most were schools still under construction or not yet handed over by the contractor:

- **Health centres (3):** Bukibologoto Health Centre III (Bulambuli), Kaptum Health Centre III (Kween) and Amanyiri Health Centre III (Yumbe).
- **Seed schools (21):** Kotomor and Omiya Pacwa (Agago), Akwon (Amolatar), Amuru Town (Amuru), Bushiribo (Bududa), Senendet (Bukwo), Burondo (Bundibugyo), Muhula (Butaleja), St Luke Kibibi (Butambala), Sidok (Kaabong), Rengen (Kotido), Kaptum and Moyok (Kween), Padibe (Lamwo), Butta (Manafwa), Moruita (Nakapiripirit), Iriiri and Lopei (Napak), Got Apwoyo (Nwoya), Okum (Otuke) and Aleka (Oyam).

All three health centres and 19 of the 21 schools had works outstanding. At St Luke Kibibi the main structures were complete and the school awaited formal commissioning and handover, and Lopei was complete, handed over and due to open the following year. Several of these facilities kept their assets in store pending completion and handover of the works: the UgIFT equipment for Kaptum Health Centre III was packed in the facility store awaiting completion of the maternity ward, the assets of Omiya Pacwa and Padibe seed schools were held at the district stores, and most of the equipment for Amanyiri Health Centre III was held at the Yumbe district stores.

Table 28 sets out five facilities where completion or preparation for use was still needed, with the gap and the action recommended for each.

Table 28: Facilities requiring completion or preparation for use

Location	Expected position and field finding	Gap or service implication	Recommended action
Got Apwoyo Seed Secondary School, Nwoya	Expected: Got Apwoyo was intended to provide secondary education with completed buildings and installed ICT equipment. Found: The team found construction continuing and the school uncommissioned. Its ICT package remained at Nwoya District headquarters, while delivered furniture and structures had not been brought into use.	The assets were not yet supporting teaching at the intended school, and custody was divided between the district and the site.	Nwoya District and the Ministry of Education should set a completion and handover plan, check the stored equipment, and arrange installation, testing and signed transfer when the school is ready.
Bukibologoto Health Centre, Bulambuli	Expected: Bukibologoto was listed as complete and was intended to provide care from the constructed health facility. Found: The team found that mudslides had damaged the works before completion. A corner was undermined and a wall cracked. Care was being provided at Simu subcounty offices, with equipment held in district stores.	The planned facility was unavailable for its intended use, and the temporary service and storage arrangements needed a lasting solution.	Bulambuli District and the Ministry of Health should obtain an engineering assessment, decide on repair or relocation, inventory the equipment and provide for continuing care.
Kyangwali Seed Secondary School, Kikuube	Expected: Kyangwali school needed completed works, electricity, security and handover to use its assets fully. Found: The team recorded continuing construction. The school reported a lack of electricity and an incomplete perimeter fence, and the facility had not been handed over.	Finishing the buildings alone would not make the school ready: power, security and responsibility for the assets also remained unresolved.	Kikuube District, the Ministry of Education and the contractor should close these requirements through one readiness plan, followed by joint testing and handover. The plan should name who will operate, safeguard and maintain the assets.
Sidok Seed Secondary School, Kaabong	Expected: Sidok school needed completed buildings and checked equipment before the investment could support full operations. Found: The team found blocks, a kitchen and toilets under construction, with termite workings on the plaster of two blocks. The school consignment remained unopened and its contents had not been counted.	Unfinished works and equipment still to be opened and checked kept the school from being ready for use.	Kaabong District should secure completion and treatment of the affected works, then arrange a witnessed opening, count and condition check of the equipment. Accepted items should be recorded, assigned to custodians and issued for use.

Location	Expected position and field finding	Gap or service implication	Recommended action
Buwagogo Seed Secondary School, Manafwa	Expected: Buwagogo school was intended to use its supplied ICT equipment for teaching. Found: The team found the March 2024 ICT consignment still boxed in the store, with contractor installation pending and commissioning delayed.	Delivery had not translated into operational ICT capacity. Equipment continued to require secure custody while installation remained outstanding.	Manafwa District and the Ministry of Education should agree an installation and commissioning date with the contractor, reconcile the stored equipment against delivery records and test it before acceptance. The handover should assign responsibility for operation, maintenance and reporting of faults.

The photographs that follow record works still in progress at the time of the visits. Figures 73 to 79 show unfinished school blocks, latrines and building works at seed schools, including Got Apwoyo (Figure 73) and Sidok (Figures 74 and 75). Figures 80 to 86 show laboratory, library and ICT buildings awaiting completion or equipment at a health centre and at seed schools, among them the ICT laboratory at Kitawoi (Figure 84) and the empty computer laboratory at Kaptum Seed Secondary School (Figure 86).



Figure 73: Unfinished school block at Got Apwoyo Seed Secondary School, Nwoya District (Acholi)



Figure 74: Unfinished classroom block at Sidok Seed Secondary School, Kaabong District (Karamoja)



Figure 75: Latrine block under construction at Sidok Seed Secondary School, Kaabong District (Karamoja)



Figure 76: Building works and construction materials at Ndheh Seed Secondary School, Nebbi District (West Nile)



Figure 77: School block awaiting completion at Butungama Seed Secondary School, Ntoroko District (Tooro)



Figure 78: Building works at a seed secondary school, Kiboga District (Buganda)



Figure 79: Classroom block with earthworks in the foreground at Kihungya Seed Secondary School, Buliisa District (Bunyoro)



Figure 80: Unfinished laboratory building at a health centre, Sironko District (Bugisu)



Figure 81: Biology laboratory under construction at a seed secondary school, Buliisa District (Bunyoro)



Figure 82: Unfinished laboratory interior at Kihungya Seed Secondary School, Buliisa District (Bunyoro)



Figure 83: Library interior under construction at Kihungya Seed Secondary School, Buliisa District (Bunyoro)



Figure 84: ICT laboratory interior under construction at Kitawoi Seed Secondary School, Kween District (Sebei)



Figure 85: Laboratory benches with cupboard doors not yet fitted, in a science laboratory block recorded as under construction, at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 86: Empty computer laboratory at Kaptum Seed Secondary School, Kween District (Sebei), where the buildings had not been handed over and no ICT equipment had been received

4.6.2 Inconsistencies

Reconciliation of the programme list against the facilities found identified 55 entries (8.7% of the programme list) in six groups: 10 that do not exist or were not constructed under the programme, four replaced by another facility, 30 operating under another name, three that are not UgIFT beneficiaries, three whose UgIFT assets were relocated to another facility and five that exist with no UgIFT assets. Table 29 names the facilities in each group by their programme-list name and district.

The 55 entries are part of the 629 programme-list facilities, and 32 of them were verified under their operating or replacing name. Identity corrections should be settled alongside decisions on incomplete works, custody, handover and operational readiness, so that the programme account reflects where services and assets are located. Appendix F gives the outcome for each entry.

Table 29: Inconsistencies between the programme list and the facilities found

Outcome	Health centres	Seed schools	Total (% of 629)	Facilities (programme-list name and district: operating or receiving name)
Does not exist or was not constructed under the programme	7	3	10 (1.6%)	Health centres: Olok HC II (Pader); Alik HC II (Lira); Acimi HC II (Oyam); Acokara HC II (Oyam); Ariba HC II (Oyam); Busia Eastern Division (Busia Municipal Council); Butoloogo HC II (Kassanda) Seed schools: Eastern Division (Tororo Municipal Council); Central Division (Jinja City); Kishangara Seed School (Ibanda)
Replaced by another facility	4	0	4 (0.6%)	Health centres: Oweko HC II (Nebbi); Pamaka HC III; Loinya HC II (Maracha); Liko HC III, already on the programme list; Ngomoromo HC II (Lamwo); Pangira HC III; Musandama HC II (Ntoroko); Butungama HC III
Operates under another name	10	20	30 (4.8%)	Health centres: Kocheka HC II (Bukedea); Kangole/Kocheka HC III; Dabani (Busia); Buwumba HC III; Mantoroba HC II (Bundibugyo); Busanga HC III; Kidubuli HC II (Kabarole); Iruhura HC III; Nyabuswa HC II (Kabarole); Nyambuusa HC III; Kabbo (Mubende); Nakawala HC III; Kikoola (Kakumiro); Mukoora HC III; Kyakatebe HC II (Kassanda); Namabaale HC III; Kagganda HC II (Lwengo); Mbirizi SSS; Bussi HC II (Wakiso); Zinga HC III, already on the programme list Seed schools: Kadungulu Seed School (Serere); Kagwara SSS; Pallisa (Pallisa); Akadot SSS; Bunambutye Seed School (Bulambuli); Bumufuni SSS; Igombe (Bugweri); Mpiita SSS; Butagaya (Jinja); Buwala SSS; Mwema Seed School (Namayingo); Mutumba SSS; Kimenyedde Seed School (Mukono); St Andrews Ndwadde mutwe SSS; Nsiika T/C (Buhweju); Ndibarema Memorial SSS; Kagadi (Kagadi); King Solomon SSS; Kiryanga Seed School (Kagadi); St Catherine Kicucura SSS; Ruteete (Kagadi); Kitegwa Community SSS; Kasenda Seed School (Kabarole); St Paul Nyabweya SSS; Kabonero (Bunyangabu); Katugunda SSS; Kyamukube Town Council (Bunyangabu); Nsuura SSS; Bufumira Seed School (Kalangala); Nekemiya Memorial SSS; Kiringente Seed School (Mpigi); Wamatovu SSS; Mpumudde Seed School (Lyantonde); Rwamabara SSS; Buhanka (Hoima); Kidukuru SSS; Maddu Seed School (Gomba); return submitted as Kyayi Seed School; Mugarama, new facilities for St Mugagga (Kibaale); St Mugagga Vocational SSS
Not a UgIFT beneficiary	2	1	3 (0.5%)	Health centres: Alira HC II (Oyam); Buyinda HC II (Kaliro) Seed schools: Kiziranfumbi Seed School (Kikuube)
UgIFT assets relocated to another facility	2	1	3 (0.5%)	Health centres: Alangi (Zombo); Amwonyo HC III; Ther-uru HC II (Zombo); Atyak HC III Seed schools: Abanga (Zombo); Kango SSS
Exists with no UgIFT assets	2	3	5 (0.8%)	Health centres: Pandwong HC II (Kitgum Municipal Council); Rwamujojo HC II (Sheema Municipal Council) Seed schools: Bumbaire Seed School (Bushenyi); Kyamuhunga (Bushenyi); Kashenshero (Mitooma)
Total	27	28	55 (8.7%)	

Counts are programme-list facilities. HC means health centre; SSS means Seed Secondary School.

Programme-list facilities that were not UgIFT

Eight programme-list facilities (1.3%) exist but were not UgIFT facilities in practice: three are not UgIFT beneficiaries and five exist with no UgIFT assets. They are four health centres (1.1% of 371) and four seed schools (1.6% of 258), and all eight were recorded as complete on the programme list. With the 10 that do not exist or were not constructed under the programme, 18 programme-list facilities (2.9%) were not UgIFT facilities: 11 health centres (3.0%) and seven seed schools (2.7%); 16 of the 18 were recorded as complete on the programme list. At three further facilities in Zombo (Alangi, Ther-uru and Abanga), the facilities exist but their UgIFT assets were relocated to another facility; with these, 21 programme-list facilities (3.3%) held no UgIFT assets at the listed site.

The ten programme-list facilities that do not exist or were not constructed under the programme are:

- **Health centres (7):** Olok HC II (Pader), Alik HC II (Lira), Acimi HC II, Acokara HC II and Ariba HC II (Oyam), Busia Eastern Division (Busia Municipal Council) and Butoloogo HC II (Kassanda).
- **Seed schools (3):** Eastern Division (Tororo Municipal Council), Central Division (Jinja City) and Kishangara Seed School (Ibanda).

Eight of the ten were recorded as complete on the programme list, and the Eastern Division and Central Division school entries as ongoing. Table 30 sets out the expected position, the finding and the recommended action for the main cases.

Table 30: Expected facilities and the outcomes established during verification

Location	Expected position and field finding	Gap or service implication	Recommended action
Olok Health Centre, Pader	Expected: Olok was listed as a completed health facility intended to serve its catchment in Pader. Found: The district health officer confirmed to the verification team that Olok Health Centre had not been constructed and did not exist in the district.	The entry recorded as complete does not correspond to a facility on the ground. The reason for non-construction requires a documented resolution.	Pader District and the Ministry of Health should reconcile the approved project, construction and payment records, correct the beneficiary schedule and decide how the intended health-service need will be met.
Busia Eastern Division health-centre entry, Busia Municipal Council	Expected: The beneficiary schedule should identify the particular health facility supported in Busia Municipality. Found: Reconciliation confirmed that no health facility called Busia Eastern Division existed. A separate return identified Sofia Health Centre III within Eastern Division.	An administrative division had been used as a facility name. The available confirmation did not identify Sofia as its replacement or establish that the two names referred to the same beneficiary.	The municipality and Ministry of Health should resolve the original beneficiary identity and document the programme status of Sofia before linking or changing the two entries.
Ngomoromo, Oweko, Musandama and Loinya health centres, Lamwo, Nebbi, Ntoroko and Maracha	Expected: The beneficiary schedule should name the facility that received each planned investment. Found: Supervisors confirmed that Pangira replaced Ngomoromo in Lamwo, Pamaka replaced Oweko in Nebbi, Butungama replaced Musandama in Ntoroko, and Liko replaced Loinya in Maracha. Liko was already listed separately.	The programme account needs to link each original entry to its confirmed replacement to prevent duplicate counting and identify the service location.	The districts and Ministry of Health should attach the replacement decisions, link the original projects to their recipients and retain one active facility identity for each recipient.
Alangi, Ther-uru and Abanga, Zombo	Expected: Asset locations and custodians should agree with the facilities holding and using the equipment. Found: The supervisor confirmed that Alangi, Ther-uru and Abanga existed, but their UgIFT assets had moved respectively to Amwonyo Health Centre, Atyak Health Centre and Kango Seed Secondary School.	The original beneficiary names no longer described where the assets were held. Custody, location and the service arrangements at the original sites needed to be made clear.	Zombo District should reconcile transfer approvals and signed receipts with both sets of inventories, name the current custodians and confirm how the original catchments are served.

Location	Expected position and field finding	Gap or service implication	Recommended action
Alira Health Centre and Kiziranfumbi Seed Secondary School, Oyam and Kikuube	Expected: The programme beneficiary schedule should include institutions supported under UgIFT. Found: The later Oyam clarification confirmed that Alira Health Centre existed but was not among the facilities upgraded under UgIFT. The supervisor also confirmed that Kiziranfumbi Seed Secondary School in Kikuube was outside the programme.	The list confused the existence of an institution with its status as a UgIFT beneficiary. Alira had initially been reported absent, but that account was corrected.	The local governments and sector ministries should approve the scope corrections, remove the institutions from the active UgIFT schedule and preserve the reasons for the changes.
Pandwong Health Centre; Bumbaie, Kyamuhunga and Kashenshero schools; Rwamujjo Health Centre, Kitgum Municipal Council, Bushenyi, Mitooma and Sheema Municipal Council	Expected: Each listed beneficiary should have a supported account of the programme assistance it received. Found: Supervisors confirmed that Pandwong Health Centre, Bumbaie and Kyamuhunga schools, Kashenshero school and Rwamujjo Health Centre existed but had not benefited from UgIFT assets.	Their appearance on the beneficiary list did not establish delivery. The cause of the difference between the list and the reported benefits needs to be resolved.	The responsible districts, municipalities and sector ministries should check beneficiary approvals and delivery records, then correct the schedule or record an approved outstanding delivery with an accountable officer and follow-up date.
Bussi/Zinga and Dabani/Buwumba, Wakiso and Busia	Expected: Each facility should have one stable identity, with local and former names linked to it. Found: Bussi was confirmed to be the village name for the already-listed Zinga Health Centre in Wakiso. In Busia, the Buwumba return was reconciled to the programme-list entry named Dabani.	Different names could make one facility appear to be two, distort coverage and separate its asset history from the correct institution.	The districts should adopt the confirmed operating names, retain the old names as aliases and link the beneficiary, project and asset information to one facility identifier. Zinga should be counted once.

Facilities found outside the programme list

Teams also submitted information under 24 facility names that are not on the programme list: 15 health facilities and nine seed schools. The verification records hold 6,090 assets under these names, with a recorded value of UGX 23,219,308,548. They are counted separately from the 629 programme-list facilities. Follow-up confirmed three as additional programme beneficiaries: Rukoki General Hospital in Kasese Municipality, Silumira Health Centre III in Kakumiro and Bukuuku Community Seed Secondary School in Fort Portal City. Together they hold 692 assets with a recorded value of UGX 1,626,028,542, and their inclusion in the approved programme account should be regularised (Table 31).

Table 31: Confirmed additional beneficiaries outside the programme list

Location	Expected position and field finding	Gap or service implication	Recommended action
Rukoki General Hospital, Kasese Municipality	Expected: Confirmed beneficiaries should be included in the programme account. Found: The supervisor confirmed that Rukoki General Hospital was a UgIFT beneficiary in Kasese Municipality, although it was absent from the programme list used for verification. The verification records hold 183 assets for the hospital, with a recorded value of UGX 541,711,918.	The programme list omitted a confirmed recipient.	The Ministry of Health and municipality should approve the beneficiary entry and link its asset information to a stable facility identifier.
Silumira Health Centre III, Kakumiro	Expected: The beneficiary schedule should include supported health facilities. Found: The supervisor confirmed that Silumira Health Centre III had benefited in Kakumiro but was not on the programme list. The verification records hold 155 assets for the health centre, with a recorded value of UGX 385,797,109.	The facility was missing from the list used to plan and account for verification.	Kakumiro District and the Ministry of Health should approve the addition and connect the beneficiary decision to the facility asset inventory.

Location	Expected position and field finding	Gap or service implication	Recommended action
Bukuuku Community Seed Secondary School, Fort Portal City	Expected: Confirmed seed-school beneficiaries should appear in the programme account, with assets handed over for full use. Found: Bukuuku was confirmed as an additional beneficiary. The team recorded improved science and computer teaching following laboratory construction, while some asset handover remained pending. The verification records hold 354 assets for the school, with a recorded value of UGX 698,519,515.	The school was omitted from the programme list and handover was incomplete.	The city and Ministry of Education should regularise the beneficiary entry and complete joint handover of the outstanding assets.

The remaining 21 names should be resolved through the same checks of facility identity, programme approval and asset custody. Some entries came from combined returns, and some may be local or former names of programme-list facilities. A further 11 names found on the ground match a programme-list entry, as the facility that replaced it, the facility that received its relocated assets, or the same facility under its operating name or a corrected district; they are counted on that entry and are not additional. Appendix F lists all 24 names while the outstanding identity and scope decisions are completed.

4.7 UgIFT support to service delivery


During the interviews, teams asked each facility how the UgIFT support had helped service delivery in the area, and what issues, challenges and recommendations it had. Of the facilities on the programme list, 284 health centres and 193 seed schools described service delivery in their answers. The percentages in this section are shares of these facilities: they show how widely a benefit or a gap was reported, not the number of patients, mothers or learners served. A facility counts once under each benefit or gap it described.

4.7.1 Benefits reported by facilities

Of the 284 health centres, 237 (83.5%) reported at least one benefit from the UgIFT support. Improved maternity and delivery services were reported by 117 (41.2%), and 51 (18.0%) reported more or safer births at the facility. Improved antenatal, immunisation, laboratory or other specific services were reported by 89 (31.3%), improved access to care or shorter distances by 70 (24.6%) and more patients attending by 60 (21.1%). More than half, 163 (57.4%), linked better services to the equipment and furniture supplied.

Of the 193 seed schools, 144 (74.6%) reported at least one benefit. A better learning environment, with classrooms, furniture and libraries, was reported by 74 (38.3%), and improved access to secondary education or shorter distances by 59 (30.6%). Practical science or ICT teaching improved at 39 schools (20.2%), and 37 (19.2%) reported higher enrolment. Forty schools (20.7%) also reported jobs and local economic benefits around the school. Figure 87 compares the benefits most often reported by the two types of facility.

Maternity care and access to education were the most reported benefits

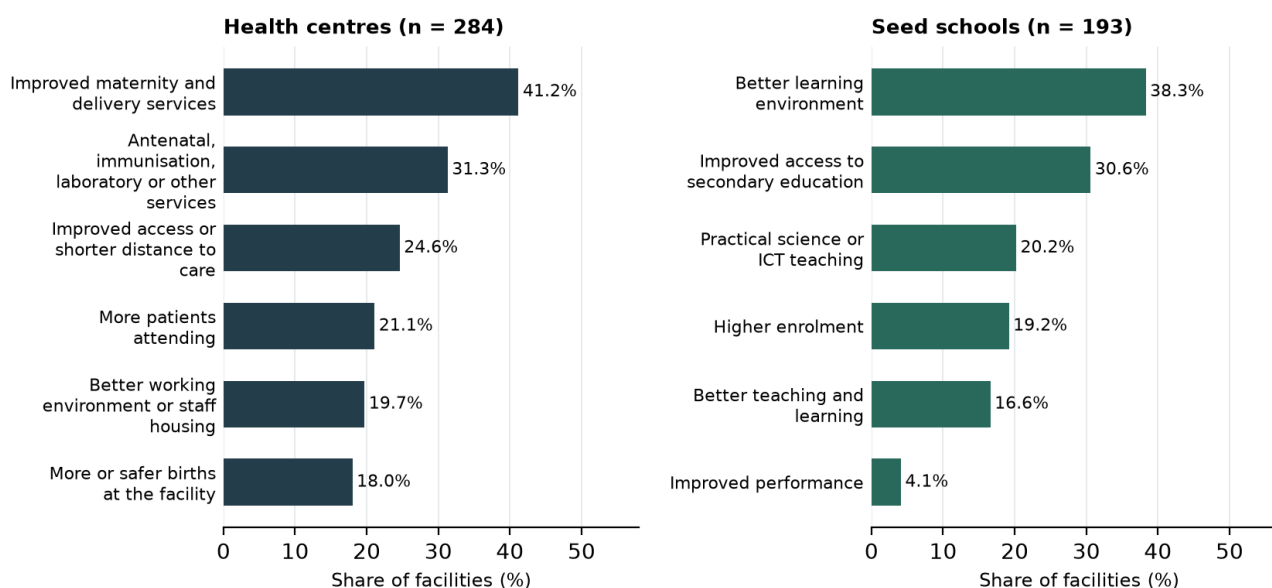

Source: Facility interviews during verification (service delivery question).

Figure 87: Maternity care and access to education were the most reported benefits

Health centre accounts show what these benefits meant for mothers and patients. Staff at Lukale Health Centre III in Buvuma said women could give birth locally instead of crossing water and had greater privacy. Kagumba Health Centre III in Kamuli reported more than 50 deliveries a month in the new maternity ward, and antenatal attendance rose from 56 to over 165 mothers a month. Kabahango Health Centre III in Bunyangabu conducted about 55 deliveries a month where it had conducted none before, and patient attendance rose from about 400 to 750. At Kataraza Health Centre III in Kyenjojo, pregnant mothers no longer walk about 40 kilometres to reach a health centre, and at Pamaka Health Centre III in Nebbi staff described increased attendance and community confidence.

Health centres gave equally practical examples of wider services. Kachuru Health Centre III in Butebo now offers laboratory services, inpatient care and minor surgery, and at Mutungo Health Centre III in Makindye-Ssabagabo Municipal Council the new building replaced an open tent shelter. Kibiri Health Centre III, in the same municipality, had begun operations by 31 August 2026, while staff were still arranging some equipment.

At Kihuukya Health Centre III in Hoima City, the renovated maternity block and walkways were recorded in use and a binocular microscope was seen functioning. Iruhura Health Centre III in Kabarole recorded adult weighing scales and waiting benches in use. Kamuli Health Centre III in Tororo reported improved service delivery, alongside continuing staffing and accommodation needs. Figures 88 to 92 show these health centre buildings and equipment in service.



Figure 88: Health centre building at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 89: Health centre buildings and covered walkway at Kihuukya HC III, Hoima City (Bunyoro)



Figure 90: Binocular microscope at Kihuukya HC III, Hoima City (Bunyoro)



Figure 91: Adult weighing scale with a height meter and waiting benches at Iruhura HC III, Kabarole District (Tooro)



Figure 92: Maternity block entrance and access ramp at Kamuli HC III, Tororo District (Bukedi)

Schools also described practical gains. Musiitwa Nazigo Seed Secondary School in Kayunga used the irrigation system for teaching and food production and provided secondary education closer to surrounding communities. Kigorobya Seed Secondary School in Hoima used its classrooms, computer room and chemistry laboratory to support teaching, and at Kihanga Seed Secondary School in Ntungamo learners acquire computer skills in the equipped computer laboratory. At Rupa Seed Secondary School in Moroto, all 41 pioneer candidates scored first grade in the Uganda Certificate of Education examinations in 2024.

Other school visits showed the value of bringing teaching space closer to communities. Enrolment at Bwizi Seed Secondary School in Kamwenge grew from 204 to 1,108 students, and at Sisuni Seed Secondary School in Manafwa from 170 to 540. Gyagenda Memorial Seed Secondary School in Bujumba reported better access to secondary education about 35 kilometres from Kalangala town, and Buyende Seed Secondary School serves learners from islands in Lake Kyoga.

Sisiyi Seed Secondary School in Bulambuli recorded its buildings, furniture and ICT in use. Sibanga Seed Secondary School in Manafwa reported shorter distances for learners and less teenage pregnancy and school dropout, although full handover was still pending. Figures 93 to 95 show teaching spaces at Gyagenda Memorial, Sibanga and Sisiyi.



Figure 93: Classroom furnished with desks and a whiteboard at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)

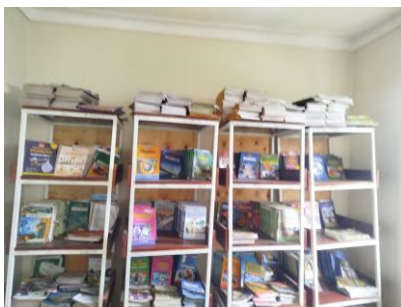


Figure 94: Books displayed on library shelves at Sibanga Seed School, Manafwa District (Bugisu)



Figure 95: ICT laboratory block and entrance ramp at Sisiyi Seed Secondary School, Bulambuli District (Bugisu)

4.7.2 User gaps and challenges

Facilities also described what held the service back. Nearly all raised at least one gap: 272 health centres (95.8%) and 180 seed schools (93.3%), or 452 of the 477 facilities (94.8%). The figures in this section count a gap as raised when a facility named it as a challenge or asked for it as a remedy in its recommendations; a facility that asked for a fence, for example, is counted under security or fencing. Table 32 gives the counts and Figure 96 compares the two types of facility.


Power was the gap raised most often, by 200 facilities (41.9%): 44.0% of health centres and 38.9% of seed schools. Staffing followed at 32.3%, inadequate space or infrastructure at 31.7% and security or fencing at 27.3%, the last raised by 37.8% of seed schools. Repair or maintenance support was raised by 22.2% of facilities, staff housing by 22.0% and water supply by 20.1%. Two gaps belonged mainly to one type of facility: training to operate equipment was raised by 28.9% of health centres, and incomplete or delayed works by 28.0% of seed schools. Equipment not installed, not assembled or delivered incomplete was raised by 17.6% of facilities.

Table 32: User gaps and challenges raised by facilities that described service delivery

Gap or challenge raised	Health centres (n = 284)	Seed schools (n = 193)	All facilities (n = 477)
Power or electricity	125 (44.0%)	75 (38.9%)	200 (41.9%)
Staffing or manpower	102 (35.9%)	52 (26.9%)	154 (32.3%)
Inadequate space or infrastructure	85 (29.9%)	66 (34.2%)	151 (31.7%)
Security or fencing	57 (20.1%)	73 (37.8%)	130 (27.3%)
Repair or maintenance support	77 (27.1%)	29 (15.0%)	106 (22.2%)
Staff housing	66 (23.2%)	39 (20.2%)	105 (22.0%)
Water supply	51 (18.0%)	45 (23.3%)	96 (20.1%)
Training to operate equipment	82 (28.9%)	3 (1.6%)	85 (17.8%)
Equipment not installed, not assembled or delivered incomplete	46 (16.2%)	38 (19.7%)	84 (17.6%)
Works incomplete, delayed, not handed over or not commissioned	28 (9.9%)	54 (28.0%)	82 (17.2%)
Access roads or transport	39 (13.7%)	19 (9.8%)	58 (12.2%)
Accessories or consumables for supplied equipment	21 (7.4%)	8 (4.1%)	29 (6.1%)
Internet or network connectivity	5 (1.8%)	7 (3.6%)	12 (2.5%)
At least one gap raised	272 (95.8%)	180 (93.3%)	452 (94.8%)

Number of facilities and share of the facilities that described service delivery. A gap is raised when the facility named it as a challenge or asked for it as a remedy; a facility can raise several gaps.

Power, staffing and space were the gaps most often raised

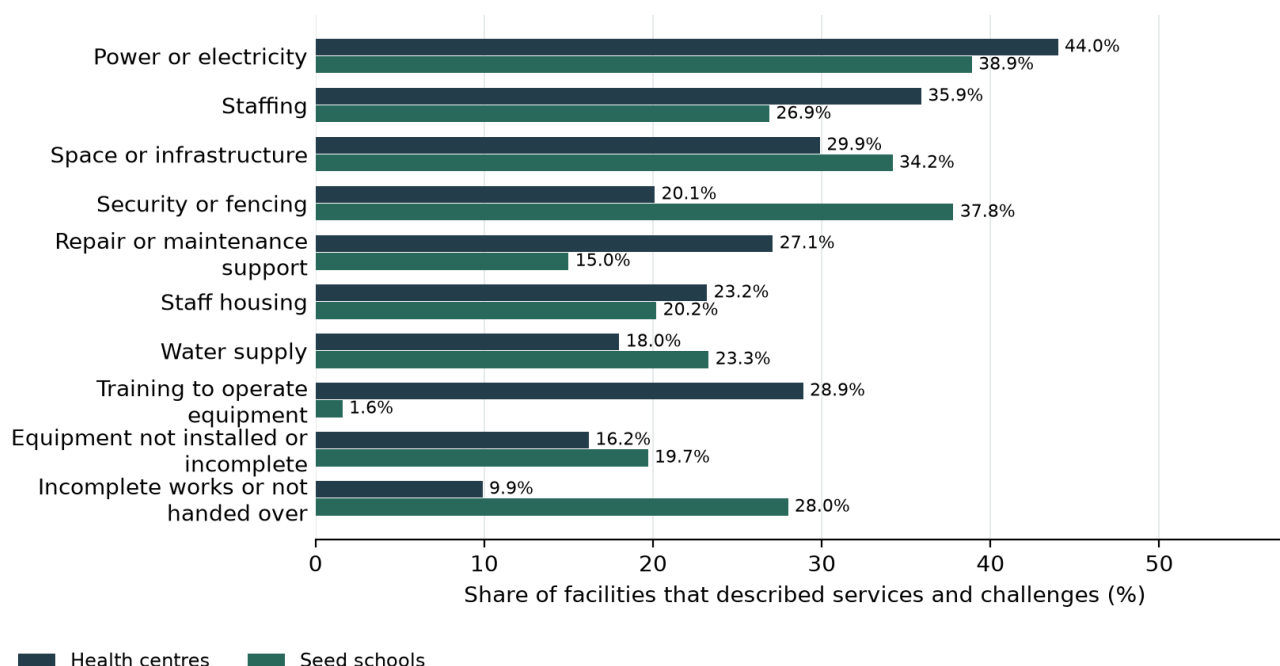

Source: Facility interviews during verification (service delivery question).

Figure 96: Power, staffing and space were the gaps most often raised

Power gaps limit the use of equipment already supplied. Loyoajonga Health Centre III in Omoro has no grid connection, so machines that need mains power cannot be used, and at Nkata Health Centre III in Buvuma weak solar batteries cannot run the equipment at the same time. Power restricted oxygen equipment at Pamaka, where the solar panel worked for only three months after commissioning. Alwi Seed Secondary School in Pakwach hires a generator to use its ICT equipment after power surges damaged some of it, and at Rupa teaching spaces served as dormitories and practical lessons depended on a hired generator.

Water and repairs were each raised by about one facility in five. Makokoto Health Centre III in Kassanda relies only on rainwater, and at Loyoajonga two of the three maternity water tanks were not connected. Nkombe Health Centre III in Mayuge reported that repairs by the regional workshop take weeks or months.

Demand also brought pressure on staff. Acii Health Centre III in Amolatar had 7 staff against 55 under the new staffing norms, and at Punuluru Health Centre III in Lira two nurses served the whole health centre. Pamaka reported too few medical personnel for its growing number of patients, and Kigorobyia reported a shortage of staff and few study materials. Mpungwe Seed Secondary School in Mayuge reported a teacher to student ratio of 1:100 against 1:60.

Space and housing gaps affect patients, learners and staff. Lakwatomer Health Centre III in Omoro attends to patients under trees for lack of space, Mpungwe hires tents at examination time for lack of classrooms, and at Kiyombya Seed Secondary School in Bunyangabu classes planned for 60 learners hold about 130. Kagumba identified needs for staff housing and for outpatient, laboratory, storage and kitchen space, and at Gyagenda Memorial 30 teachers share six housing units.

Security and access gaps affect assets and attendance. Christ the King Mpasana Seed Secondary School in Kakumiro, which has no fence, lost 20 computers from its laboratory, and Budongo Seed Secondary School in Masindi lost 16 of its 28 computers through theft. At Musiitwa Nazigo, the long distances that learners walk affected attendance.

Works, deliveries and installation also held back some services. Kigumba Town Seed Secondary School in Kiryandongo reported that construction took over two years against a six-month programme; section 4.3.1 presents the facilities whose works were outstanding at the time of the visit. At Katuugo Health Centre III in Luweero, 26 items on the delivery schedule had not yet been delivered by the supplier, and at Anamwany Health Centre III in Amolatar delivery beds had not been assembled because they arrived without their nuts. Training needs came almost entirely from health centres, where staff asked for orientation on the equipment supplied; section 4.5.2 shows how user skills kept some of it idle.

4.8 Summary of findings

The report covers 226,280 assets at ministries and agencies, blood banks, health centres and seed secondary schools. 215,879 (95.4%) were in good condition, comprising 212,760 in use and 3,119 in store. 3,392 (1.5%) were broken. 49,457 of 216,736 movable assets (22.8%) were engraved. Recorded value was UGX 971,615,425,138 and net book value was UGX 808,621,845,836. The same four headings, availability, condition, identification and financial aspects, organise the ministry, health centre, school and blood bank sections.

5 Recommendations

The verification found that most UgIFT assets were in place and serving their purpose: 221,093 of the 226,280 assets (94.2%) were working and in use, and 590 of the 629 facilities on the programme list were verified on the ground. The next phase should turn these findings into actions that protect assets and improve care, teaching and programme administration. The recommendations in this chapter address the gaps that remain between delivery and use: the 13,520 assets (5.8%) not in use, the 115 verified facilities with works outstanding, the 78.0% of verified assets not engraved and the practices that keep assets in service. Each recommendation first sets out the finding it answers, with its figure, and then the action and the institutions responsible.

The recommendations begin with maintenance, which applies to every asset, and end with the actions for individual facilities. Where a finding differs by level, national institutions are covered first, then the blood banks and then local governments. Accounting Officers should use the priority action plan in Table 33 to assign responsibility, agree resources and check completion, and Table 34 sets out the recommended action for individual facilities where the field visits identified a specific need or a practice to sustain.

5.1 Maintenance and repairs

Maintenance keeps UgIFT assets working for the services they were bought to support. Most of the verified assets are furniture, clinical equipment and computers in daily use at health centres and seed schools, where wear and breakage are to be expected. Routine checks, a record of faults and a dependable route for repair decide whether a broken item returns to use quickly or stays out of service. During the verification, each facility was asked how it maintains, repairs, services or replaces UgIFT assets and whether it keeps a regular record of their functionality or breakdown.


Repair arrangements. Of the 469 facilities that described their maintenance arrangements, 260 (55.4%) met repairs at facility level, from their own funds or with their own staff. Health centres named Primary Health Care funds (94 of 278, 33.8%), while schools named the capitation or Universal Secondary Education grant, parents' contributions or the school budget (52 of 191, 27.2%). Busaale Health Centre III in Kayunga used Primary Health Care funds for repairs, and Kagumba Seed Secondary School in Kamuli had repaired broken furniture during the second term. A facility could describe more than one arrangement.

Support from outside the facility was cited by 151 facilities (32.2%): district offices, mainly the District Health Officer, 84 (17.9%); regional referral hospital workshops or national teams 52 (11.1%); hired technicians and artisans 27 (5.8%); and contractors or suppliers under defects liability, guarantee or warranty 12 (2.6%). Major medical equipment repairs depended on this support. Todora Health Centre III in Nwoya worked through the District Health Officer and the Gulu Regional Referral Hospital technical team, Avogera Health Centre III in Buliisa received support from Hoima Regional Referral Hospital, and Bundimulangya Health Centre III in Bundibugyo obtained a team through the District Health Officer.

In all, 97 facilities (20.7%), 59 of them schools, had not yet needed maintenance because the assets were new, not yet handed over or the buildings were still under construction, and 36 (7.7%) reported no repair arrangement, with broken items set aside or not repaired. Funds for maintenance and repair were reported as insufficient, particularly for major repairs, by 32 of the 505 facilities that described maintenance or challenges (6.3%). At Kyankaramata Health Centre III in Kyenjojo, Primary Health Care funds met minor repairs, but the cost of major repairs was a constraint.

Figure 97 compares these arrangements at health centres and seed schools. Health centres relied more on outside technical support (41.0% of health centres against 19.4% of schools), while schools more often had not yet needed maintenance (30.9% against 13.7%).

Most facilities met repairs from their own funds or staff

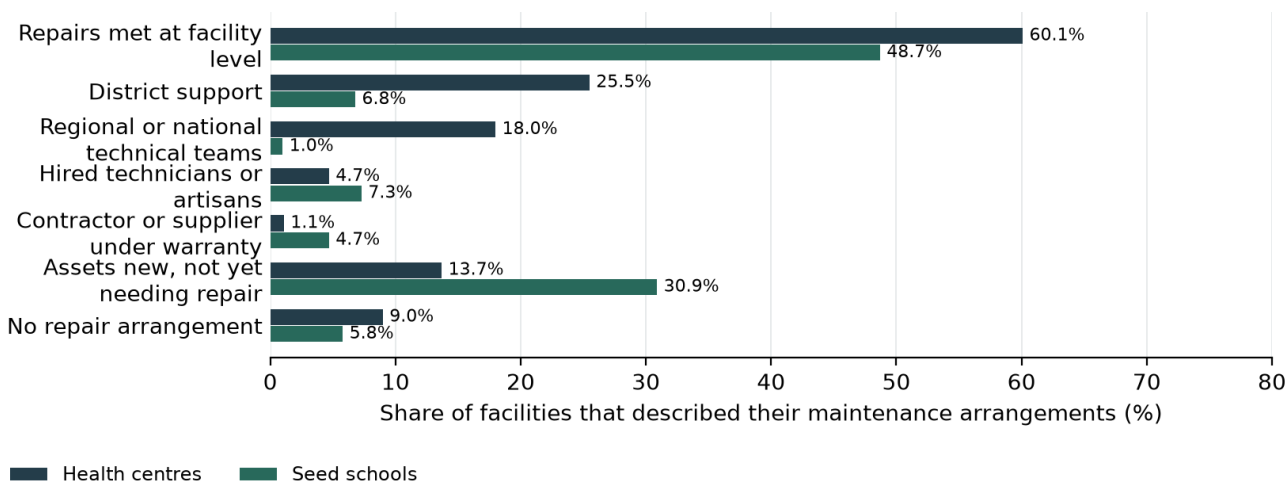


Source: Facility interviews during verification (maintenance question).

Figure 97: Most facilities met repairs from their own funds or staff

Frequency. Few facilities worked to a fixed maintenance interval. Of the 494 programme-list facilities that described how they maintain UgIFT assets or check their condition, 50 (10.1%) did so at a fixed interval. Of these 50, 14 (28.0%) worked annually, 11 (22.0%) monthly, 10 (20.0%) quarterly, 9 (18.0%) every school term, 3 (6.0%) twice a year and 3 (6.0%) weekly or daily, as Figure 98 shows. A further 18 facilities (3.6%) described routine or scheduled servicing without a set interval, mostly scheduled visits by regional referral hospital maintenance teams, and 62 (12.6%) repaired items as the need arose. Ngwedo Seed Secondary School in Buliisa engaged a caretaker every month and used the Directorate of Industrial Training for furniture repairs, while Busaale reviewed asset condition every quarter.

Annual, monthly and quarterly checks were the most common stated intervals

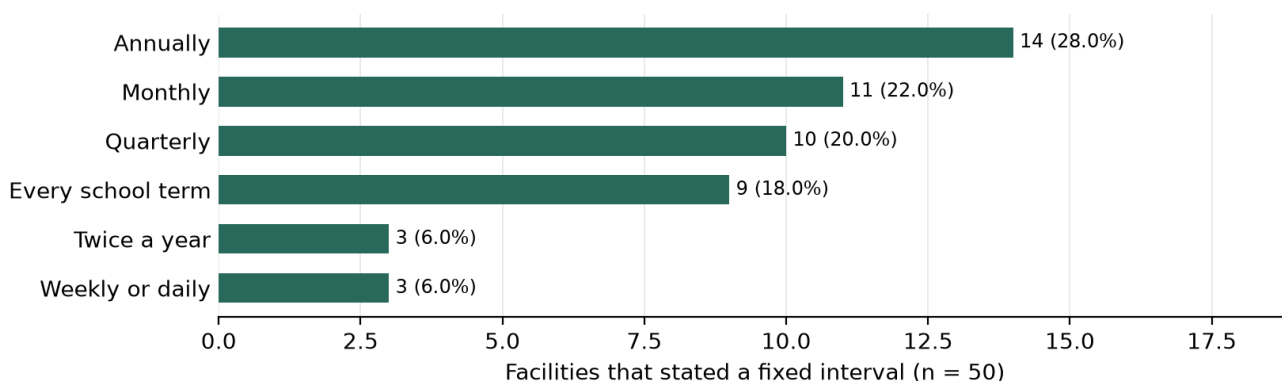

Source: Facility interviews during verification (maintenance and condition-record questions).

Figure 98: Annual, monthly and quarterly checks were the most common stated intervals

Records. Of the 463 facilities that answered, 318 (68.7%) kept a regular record of asset functionality or breakdowns, 36 (7.8%) kept a partial or informal record, 80 (17.3%) kept none and 29 (6.3%) had not yet started because the assets were new or the facility was not yet operating. Of the 478 facilities that answered, 355 (74.3%) held a record of the UgIFT assets they received, 40 (8.4%) held a partial record, such as delivery notes only or a general register that does not identify UgIFT items, and 83 (17.4%) held none. Kagumba Health Centre III in Kamuli kept an asset condition book, a simple practice that other facilities can adopt.

Recommendation. Facility managers and school governing bodies should keep the local and regional repair arrangements that already work and adopt a fixed routine: a condition check at least every school term in schools and every quarter in health centres, and a full count of UgIFT assets each year. Each facility should keep a condition book or fault list naming each item requiring action, the responsible person and the agreed completion date; the 36 facilities with no repair arrangement and the 80 with no functionality or breakdown record should set these up first.

District health and education offices should review unresolved repairs each quarter and arrange technical assistance, and regional referral hospital workshops should include UgIFT equipment in their scheduled visits. Annual maintenance plans should separate minor repairs, which facilities can meet from Primary Health Care funds or school grants, from specialist and major repairs that need district or national funding, as the experience at Kyankaramata shows, and their costs should be included in the next budget cycle. A repair should count as complete only when the item has been checked and returned to safe use, or formally assigned another outcome.

5.2 Restore safe operation

Finding. Of the 226,280 assets in this report, 13,520 (6.0%) were not in use. Of these, 3,392 (25.1%) were broken and 3,119 (23.1%) were in store and in good condition. At the ministries and agencies, 20 assets (0.1%) were not in use, three of them laptops at the Office of the Prime Minister recorded as damaged. The blood banks had 24 assets (3.8%) not in use, including six blood pressure machines at Arua Regional Blood Bank recorded as damaged or not functional. In local governments, 5,685 assets at health centres (8.9%) and 7,791 at seed schools (5.4%) were not in use. Broken school furniture is concentrated in chairs, desks and stools (section 4.4.2).

Some damaged items remained in use or presented a risk. A cracked laboratory stool was still in use at Sikuda Seed Secondary School in Busia, a broken water-tank stand presented a threat to students at Wadelai Seed Secondary School in Pakwach, and staff at Nyamarunda Health Centre III in Kibaale raised concerns about the electrical installation. Table 34 sets out the action recommended at each of these facilities.

Recommendation. Facility managers, district health and education officers, engineers and technical teams should prioritise unsafe furniture, electrical concerns and failed equipment needed for essential services. Withdraw unsafe items, obtain technical assessments and verify safe operation after repair. The broken down and not functional assets should be assessed in order of their effect on care and teaching, beginning with clinical equipment and the school furniture that makes up most of the broken down assets; items beyond economic repair should receive a formal disposal decision. At national level, the Office of the Prime Minister should decide on repair or replacement of its three damaged laptops, and Uganda Blood Transfusion Services (UBTS) should repair or replace the six broken blood pressure machines at Arua Regional Blood Bank. Keep damaged assets separate from usable assets awaiting installation so that each receives the appropriate action.

5.3 Complete works and bring stored assets into use

Finding. Of the 590 facilities verified, 475 (80.5%) had completed works and 115 (19.5%) had works outstanding: 27 health centres (7.8% of those verified) and 88 seed schools (36.2%). Of the 115, 63 were already providing services, while 24 verified facilities, 21 of them seed schools, were not yet providing services; 22 of these 24 had works outstanding. At Ndhew and Mamba Seed Secondary Schools in Nebbi, unfinished buildings delayed installation: science equipment was held at district headquarters, and Mamba accommodated its computers in older structures.

Of the 13,520 assets not in use, 3,200 (23.7%) were in storage at 181 facilities, 164 health centres and 17 seed schools; at national level the asset records place no assets in storage, although the field teams observed furniture left in a former MoFPED store and equipment kept in the Hoima blood bank stores (sections 4.1.1 and 4.2). Of the stored assets, 190 (5.9%) were waiting for power, 80 (2.5%) for a building or room and 141 (4.4%) were held

at district stores or another facility, while 519 (16.2%) were described as new, boxed or in good condition. More widely, 1,324 assets not in use (9.8%), at 79 facilities, were waiting for power (331, 2.4% of assets not in use), a building or room (483, 3.6%), installation or assembly (493, 3.6%), trained users (16) or staff (1), and a further 97 (0.7%) lacked accessories, parts or consumables.

Facility accounts point to the same blockers. Of the 477 facilities that described services and challenges, 156 (32.7%) reported idle or unusable equipment: 71 of these (45.5%) linked it to power, 32 (20.5%) to installation and 27 (17.3%) to incomplete buildings or lack of space. Lungulu Seed Secondary School in Nwoya kept computers boxed in store pending a power connection, and at Nansanga Seed Secondary School in Budaka 27 of 28 desktop computers remained packed for lack of reliable power.

Recommendation. District Accounting Officers, engineers, health and education officers and contractors should coordinate outstanding buildings, utilities, furniture and equipment through site-specific completion plans for each of the 115 facilities with works outstanding, starting with the 22 of them that were not yet providing services. Installation should follow confirmation that rooms, power, water and security are ready. Stored assets described as new or in good condition should be issued to the rooms where they are needed, and each asset waiting for power or installation should have a named date for connection and testing. Protect services already operating during construction, and complete testing and signed handover before closing each action.

5.4 Equip staff to operate and maintain assets

Finding. Skills and staffing limited the use of equipment most at health centres. Of the 156 facilities that reported idle or unusable equipment, 52 (33.3%) linked it to staff being unable to operate the equipment; 51 of these were health centres, 45.9% of the 111 health centres reporting idle equipment. Training or skills to operate equipment was raised as a gap by 85 facilities (17.8%), 82 health centres (28.9%) and 3 seed schools (1.6%), and 61 facilities (12.8%) asked for training or orientation on the equipment. Staffing was raised by 154 facilities (32.3%), and 9 of the facilities with idle equipment (5.8%) had no personnel or specialist to use it.

At Bubago Health Centre III in Kamuli, staff needed training to operate and maintain an oxygen concentrator. At Sop Sop Health Centre III in Tororo, much of the equipment remained in store because staff did not know how to operate it, and Avogera Health Centre III asked for user orientation and technical skills.

Recommendation. District health officers, facility managers, suppliers and regional technical teams should provide practical training for staff who use specialist equipment, starting with the health centres that linked idle equipment to a lack of skills, including oxygen equipment users at Bubago and Sop Sop and staff requiring orientation at Avogera. Handover should include a demonstration, basic maintenance guidance and a named route for technical support. Future supply contracts should make on-site demonstration to the staff who will use the equipment a condition of acceptance, and staffing reviews should take account of the equipment each health centre now holds.

5.5 Strengthen identification and custody

Finding. Of the 216,736 movable assets, 49,457 (22.8%) were engraved and 167,279 (77.2%) were not engraved. 23,434 (10.8%) were properly engraved with the UgIFT marking, and 26,023 (12.0%) carried another marking only. Ministries and agencies had engraved 4,843 of 15,385 movable assets (31.5%). The Ministry of Education and Sports accounts for most ministry assets that were not engraved, because the TELA handsets and tablets carry no engraving. Blood banks had engraved 43 of 605 (7.1%), health centres 9,446 of 62,071 (15.2%) and seed schools 35,121 of 138,671 (25.3%).

The custody findings concern assets held away from the facility or still in delivery. Of the assets not in use, 2,522 (18.7%) were in this position: 985, mainly furniture for five seed schools, had not yet been delivered by the suppliers, who were still finishing them; 703 had not yet been received at 98 facilities; 159 were held at district

stores or another facility; and 675 were not at the facility at the time of the visit. The last group includes 12 desktop computers and four uninterruptible power supply (UPS) units whose location the Ministry of Works and Transport was tracing. A further 525 assets (3.9%), 515 of them at seed schools, were reported stolen, lost or missing, and 45 were kept in store because of insecurity.

Equipment from Bumunji, Buwembe and Majanji health centres in Busia had been transferred to Masafu General Hospital, and equipment intended for Todora in Nwoya had gone to Paraa during construction. Security or fencing was raised as a gap by 130 facilities (27.3%), and 42 facilities (8.8%) themselves asked for assets to be engraved and asset registers kept.

Recommendation. Institution asset managers and district finance, health and education offices should engrave verified movable assets with the UgIFT marking and confirm their locations and custodians, starting with hospital equipment, the Ministry of Education and Sports handsets and tablets, and the Lungulu holdings. Assets carrying another marking only should receive the programme identifier at their next check. Resolve the continuing allocation of equipment at Todora, Paraa and Masafu through signed transfer or receipt documentation, bring assets held at district stores to their facilities once rooms are ready, and complete delivery of the items still with suppliers.

The Ministry of Works and Transport should complete the tracing of the 12 desktop computers and four UPS units and confirm their custodians. Losses should be reported and investigated under the public finance rules, and every facility should hold a list of the UgIFT assets it received, showing each item, its engraving and its custodian. Maintain site, ownership and handover records for buildings and land.

5.6 Resolve programme-list inconsistencies

Finding. All 629 facilities on the programme list were accounted for, and 590 (93.8%) were verified on the ground. Table 29 shows that 55 programme-list entries differed from what the teams found: 10 facilities (1.6%) did not exist or were not constructed under the programme, 4 had been replaced by another facility, 30 operated under another name, 3 were not UgIFT beneficiaries, 3 had their assets relocated to another facility and 5 existed with no UgIFT assets. In all, 18 facilities (2.9% of the programme list) were not UgIFT facilities in practice, including the 10 that do not exist.

The programme list also recorded 44 facilities as complete where works were outstanding in the field, and 4 as ongoing where works were complete. Teams found a further 24 facility names outside the programme list, of which Rukoki General Hospital, Silumira Health Centre III and Bukuuku Community Seed Secondary School were confirmed as additional beneficiaries.

Recommendation. The Ministry of Finance, Planning and Economic Development, with the Ministry of Health, the Ministry of Education and Sports and the local governments concerned, should approve a corrected programme list. It should remove or annotate the 18 entries that were not UgIFT facilities in practice, with the reason for each change; link the 4 replaced and 30 renamed entries to one facility identifier, keeping the former names as aliases; record the 3 relocations with signed transfers and receipts; correct the construction status of the 48 entries that differed from the field; and add the 3 confirmed additional beneficiaries. The other 21 names found outside the programme list should be resolved through the same checks of identity, programme approval and asset custody. The corrected list should then guide decisions wherever planned locations differed from what teams found. Appendix F lists every facility concerned.

5.7 Plan for continued service delivery

Finding. The assets are supporting services: 520 of the 590 verified facilities (88.1%) were providing services. Of the 284 health centres that described the effect of UgIFT support, 237 (83.5%) reported a benefit, including improved maternity and delivery services at 117 (41.2%); of the 193 seed schools, 144 (74.6%) did so, including

a better learning environment at 74 (38.3%) and improved access to secondary education at 59 (30.6%). The gaps raised most often were power (200 facilities, 41.9%), staffing (154, 32.3%), space or infrastructure (151, 31.7%), security or fencing (130, 27.3%), repair and maintenance support (106, 22.2%), staff housing (105, 22.0%) and water supply (96, 20.1%).

Kagumba Health Centre III needed staff housing and outpatient, laboratory, storage and kitchen space; Pamaka Health Centre III in Nebbi reported staffing pressure; Kigorobya Seed Secondary School in Hoima was constrained by teaching staff and study materials; and attendance at Musiitwa Nazigo Seed Secondary School in Kayunga was affected by long walking distances. Facilities also asked to take part in planning and procurement (37 facilities, 7.8%) and for quality and specifications to be checked before delivery (48, 10.1%).

Recommendation. Districts and sector ministries should review staffing, operating funds, clinical and teaching space, consumables and utilities alongside asset needs, taking power, staffing and space first as the gaps most often raised. The first round of follow-up should go to actions that restore or expand a service using assets already supplied: reliable electricity, completion of classrooms and laboratories, repair of maternity buildings, practical equipment training and return of damaged furniture to safe use. Future deliveries should follow confirmation of facility readiness, with facility managers involved in planning and in checking specifications before equipment is accepted. Managers should report progress through rooms opened, assets installed, repairs completed and staff able to operate equipment, using the proposed timeframes and evidence of completion in Table 33.

5.8 Priorities for follow-up

The first priority is to make unsafe items and installations safe and restore equipment needed for care and teaching. The next is to complete works, provide utilities and install assets that can then be used. Engraving, custody checks and routine servicing should form part of the same follow-up, with responsibility assigned to the institution and its supervising office.

Future delivery plans should confirm the room, power, water, storage and staff requirements before equipment arrives. Facility managers should take part in that planning, as recommended at Kyankaramata and Avogera. Table 33 sets out eight priority actions with proposed owners, timing and evidence of completion. The timeframes are proposed from approval of this report; Accounting Officers should assign responsible staff and track each action to completion.

Table 33: Priority actions to protect assets and restore service

Priority	Action	Responsible institution	Proposed timing	Evidence of completion
1	Withdraw damaged furniture that presents a safety concern, inspect the electrical concerns at Nyamarunda Health Centre III, and assess the failed solar and oxygen equipment arrangements at Pamaka Health Centre III. Assess the 3,392 assets recorded as broken down, damaged or obsolete, starting with essential clinical equipment and unsafe school furniture.	Facility managers, district health and education officers, district engineers and regional medical equipment technical teams	Inspect within 30 days of report approval; complete minor corrective work within 60 days.	Unsafe items withdrawn; signed technical assessment; repair record and demonstration of safe operation.
2	Agree completion plans for Got Apwoyo, Ndhew, Mamba and Butungama seed secondary schools and the other facilities among the 115 verified with works outstanding (27 health centres and 88 seed schools). Coordinate the remaining works, utilities, furniture and equipment installation; protect ongoing equipment use at Atego Seed Secondary School.	District Accounting Officers, district engineers, district education officers, contractors and Ministry of Education and Sports, with the Ministry of Health for health centres	Agree site-specific completion plans within 30 days; track progress monthly against the approved dates.	Schedule of outstanding works; approved completion dates; inspection and handover documents; classrooms or laboratories opened for their intended use.

Priority	Action	Responsible institution	Proposed timing	Evidence of completion
3	Provide the power required at Lungulu Seed Secondary School, assess and install the boxed equipment at Kalemungole Health Centre III, and assess the repair needs of stored items at Avogera Health Centre III. Review the 3,200 assets in storage at 181 facilities and the 1,324 assets waiting for power, a building, installation or trained users. Keep damaged and usable stored items on separate action lists.	District health and education officers, facility managers, electrical contractors and regional technical teams	Confirm readiness and actions within 30 days; complete installation within 90 days where rooms and utilities are ready.	Equipment location check; power and installation sign-off; named custodian; practical demonstration and date first used.
4	Repair the roof, doors and solar system at Busaale Health Centre III, arrange the major repair support needed at Kyankaramata Health Centre III, assess the three damaged laptops at the Office of the Prime Minister and repair or replace the six broken blood pressure machines at Arua Regional Blood Bank.	Facility managers, district health officers, district engineers and the responsible national institution asset managers	Agree priority work within 30 days and complete funded repairs within 90 days.	Approved repair list; work orders; repairs checked and assets returned to use or assigned a formal disposal decision.
5	Provide practical operation and basic maintenance training for oxygen equipment users at Bubago Health Centre III and Sop Sop Health Centre III and the staff requiring equipment orientation at Avogera Health Centre III, then extend it to the 52 facilities that linked idle equipment to a lack of skills.	District health officers, facility in-charges, suppliers and regional medical equipment technical teams	Complete initial training within 60 days and review use after a further 30 days.	Training attendance by role; practical demonstration of equipment use; named technical support contact.
6	Engrave the 175,242 verified assets that are not engraved (78.0%), starting with the identified Lungulu holdings and hospital equipment; add the UgIFT marking to the 26,023 assets carrying another marking only; and confirm the final allocation of transferred equipment at Todora, Paraa and Masafu.	Institution asset managers, facility managers and district finance, health and education offices	Confirm allocation within 30 days and complete priority engraving and custody checks within 90 days.	Readable engraving; item-to-custodian match; signed transfer or receipt and agreed final location.
7	Retain the functioning local and regional repair arrangements and prepare annual maintenance plans that separate minor repairs from specialist work, starting with the 36 facilities (7.7%) that reported no repair arrangement. Review unresolved faults each quarter.	Facility managers, school governing bodies, district health and education officers and national institution Accounting Officers	Prepare plans within 90 days, include costs in the next budget cycle and review quarterly.	Funded maintenance plan; fault list with responsible roles and due dates; service history and closed repair actions.
8	Review supporting clinical space and staffing at Kagumba Health Centre III and Pamaka Health Centre III, teaching staff and materials at Kigorobya Seed Secondary School, and attendance barriers at Musiitwa Nazigo Seed Secondary School. Include power, staffing and space, the gaps most often raised (41.9%, 32.3% and 31.7% of facilities), in future asset planning.	District health and education officers, facility managers and the relevant sector ministries	Complete service-needs reviews within 90 days and include agreed measures in the next planning and budget cycle.	Agreed staffing and space priorities; service or teaching plan; funded actions and periodic review of use.

5.9 Facility findings and recommended actions

Table 34 brings together the facility findings from the field visits and the action recommended for each, grouped by theme: repairs and safety, completion and utilities, installation and skills, custody, service needs, and practices to sustain. The construction cases and programme-list inconsistencies discussed in section 4.3 carry their recommended actions in those tables and are not repeated here.

Table 34: Facility findings and recommended actions

Facility and district	Finding	Recommended action
Repairs and safety		
Busaale Health Centre III, Kayunga	The facility used Primary Health Care funds for maintenance and kept a quarterly condition record, but the maternity roof leaked, door hinges were damaged and the solar battery needed replacement.	Cost and complete the roof, door and battery repairs, then confirm that the affected rooms and solar system are working.
Musiitwa Nazigo Seed Secondary School, Kayunga	The school checked furniture and fittings each term and repaired them when funds allowed; broken furniture remained out of use while funding was arranged.	Prepare a termly repair list and fund repairs in order of their effect on teaching and safety.
Sikuda Seed Secondary School, Busia	Broken desks and a cracked laboratory stool were found, and the cracked stool was still in use. In all, 23 desks were out of use, 21 of them awaiting repair.	Withdraw unsafe furniture from use and repair or replace it before returning it to classrooms or laboratories.
Nyamarunda Health Centre III, Kibaale	The facility identified and set aside broken items and referred them to the District Health Officer. Staff raised concerns about staff-quarter workmanship, electrical installation, drainage, water security and storage.	Carry out a joint engineering and health inspection, make unsafe installations safe and complete the agreed repairs.
Kijuna Health Centre III, Kassanda	The wheelchairs were not functional, and a failed water pump left the facility with inadequate water. Inadequate power also prevented full use of electronic equipment.	Kassanda District should arrange technical assessment and repair of the wheelchairs and pump, restore a dependable power supply and test the affected equipment before returning it to use.
Kyasansuwa Health Centre III, Kassanda	Three computers were completely damaged following unstable power and surges. Poor floor finishes and defective staff bathroom levels were also observed.	Kassanda District should stabilise and protect the electrical supply, assess the three computers for repair or replacement, and correct the floor and bathroom defects under technical supervision.
Alwi Seed Secondary School, Pakwach	The school reported power surges. Nine monitors and 10 system units were not working, as were the server power-backup unit and 20 other power-backup units, and only one of 13 security cameras was functional.	Pakwach District and the school should first assess the electrical supply and protection, then repair or replace failed equipment and test the whole laboratory and camera system before acceptance.
Wadelai Seed Secondary School, Pakwach	The school's 20 desktop computers were working and in use, but a solar fault interrupted use of electrical equipment. One water-tank stand was broken and presented a threat to students.	Restrict access around the damaged tank support pending an engineering assessment, repair the support, and restore and test the solar system.
Kyankaramata Health Centre III, Kyenjojo	Primary Health Care funds paid for minor repairs, but the cost of major repairs was a constraint; 57 assets were not in use, 30 of them recorded as not functional.	Prepare costed technical referrals for major repairs and agree district funding and follow-up.
Completion and utilities		
Ndhew Seed Secondary School, Nebbi	Buildings were incomplete, with computer and science equipment held at district headquarters and furniture not yet installed. Delivery of equipment had not yet produced an equipped school.	Complete the outstanding works and sanitation facilities and coordinate furniture and equipment installation with handover.
Mamba Seed Secondary School, Nebbi	Construction was incomplete. Computers were temporarily accommodated in older structures, while science equipment remained at district headquarters, so the planned laboratory and computer spaces were not ready for full installation.	Complete and commission the buildings, install the equipment and confirm safe operation before formal handover.
Atego Seed Secondary School, Nebbi	Computers were connected and working in older rooms while construction continued. Staff reported power surges, and the planned facilities were not fully commissioned.	Stabilise the power supply, protect the installed computers and finish the remaining works.
Butungama Seed Secondary School, Ntoroko	The school was still under construction at the time of the interview.	Confirm the outstanding works with the district engineer and agree the completion and handover sequence.

Facility and district	Finding	Recommended action
Muhula Seed Secondary School, Butaleja	The contractor had not handed over the school, and it was not operating. Buildings showed cracks, an air conditioner remained boxed with a missing fan and the installed water pump was not working; 120 desks and 20 desktop computers were new and not yet in use.	Butaleja District and the Ministry of Education and Sports should agree a defects and handover schedule with the contractor, rectify the works, complete the equipment and witness operational tests before handover.
Kihungya Seed Secondary School, Buliisa	The science block, computer laboratory and library were still under construction, and staff quarters were incomplete. The school reported no electricity for computer sessions, no water for sanitation and no perimeter fence; its administration block was already in use.	Buliisa District and the Ministry of Education and Sports should use one completion plan for the laboratories, staff housing, electricity, water and security, with separate testing and handover of each finished element.
Lungulu Seed Secondary School, Nwoya	The school funded minor repairs and kept breakdown information, but computers remained in storage pending power. The stored equipment included defective desktop units, and the assets were not engraved.	Provide a suitable power connection, repair defective units, install the usable equipment and engrave the assets with the UglIFT marking.
Nansanga Seed Secondary School, Budaka	The school lacked reliable power, and 27 of its 28 desktop computers remained packed.	Budaka District and the school should settle the power connection or a suitable alternative, arrange installation and testing, and confirm the number of computers available to learners.
Rupa Seed Secondary School, Moroto	The school hired a generator for practical lessons and used its library and computer laboratory block as dormitories; 58 assets, including 26 UPS units and 25 desktop sets, were not in use for lack of power.	Agree a room-use plan and power solution that restores the library and computer laboratory functions.
Pamaka Health Centre III, Nebbi	Staff reported increased attendance and community confidence, but the solar system was not working, oxygen equipment could not be used because of power constraints, and staffing was under pressure.	Restore reliable power and demonstrate oxygen equipment operation; review staffing against patient demand.
Kikandwa Health Centre III, Kassanda	Electronic equipment could not be used because reliable electricity and solar power were unavailable. Storage for damaged assets was inadequate, the facility lacked a perimeter fence, and defects were observed in flooring and skirting.	Kassanda District should agree a joint power, security and defects plan, provide secure temporary storage, and have technical staff verify repairs and equipment operation.
Installation and skills		
Kalemungole Health Centre III, Moroto	Neonatal respiratory equipment remained in an unopened carton and treatment trolleys were still wrapped, so delivered items had not been brought into routine use.	Check the equipment, confirm the room and staff requirements, and arrange installation and user orientation.
Bubago Health Centre III, Kamuli	Staff identified difficulty operating and maintaining an oxygen concentrator.	Arrange practical user training and a technical check, then demonstrate operation with the staff responsible for the equipment.
Sop Sop Health Centre III, Tororo	Much of the equipment remained in store because staff did not know how to operate it, and oxygen equipment had arrived without cylinders. Tuberculosis testing and maternity services had nevertheless improved.	Tororo District and the Ministry of Health should arrange practical training at the facility, confirm the required oxygen components, and check that trained staff can safely use each released item.
Butiaba Health Centre III, Buliisa	The hydraulic delivery bed was not in use because staff needed operating guidance, and staff had difficulty obtaining test strips for the supplied glucometers. In all, 41 assets, mostly instrument sets, kits and hollow ware, were kept in store.	Demonstrate safe operation of the delivery bed with its users, arrange a reliable supply of compatible glucometer strips and issue the stored instrument sets for use.
Avogera Health Centre III, Buliisa	The facility carried out local repairs and received technical support from Hoima Regional Referral Hospital. Items that could not be repaired remained stored, and staff identified technical skills, user orientation and storage needs.	Assess the stored items for repair, give practical user training and agree a suitable storage arrangement.

Facility and district	Finding	Recommended action
Bunamono Health Centre III, Bududa	The water tank was not working and the solar pump was not connected, leaving the staff houses without water. A supplied laboratory stand remained boxed because staff could not assemble it, and a glucometer lacked test strips.	Bududa District should complete and test the water connection, arrange assembly and user demonstration for the laboratory stand, and establish a supply of compatible glucometer strips.
Custody		
Bumunji, Buwembe and Majanji Health Centres III and Masafu General Hospital, Busia	Equipment had been transferred from the health centres to Masafu General Hospital, so allocation and custody required confirmation.	Confirm the receiving custodian, location and service need, and retain signed transfer and receipt documentation.
Todora and Paraa Health Centres III, Nwoya	Todora used the regional technical maintenance team, while some equipment originally intended for Todora remained at Paraa after redirection during construction.	Confirm the service need at both facilities, formally allocate or transfer the equipment and update the named custodians.
Kihungya Health Centre III, Buliisa	Staff reported more room for patients, easier working arrangements through staff accommodation and electricity from the new solar power house. A gas stove, electric suction apparatus, laboratory stool and electric centrifuge were held at the subcounty rather than the health centre.	Preserve the working building and solar arrangements, confirm who holds the equipment kept at the subcounty and agree whether it should be deployed to the health centre.
Service needs		
Kagumba Health Centre III, Kamuli	Staff reported increased maternity and antenatal service use. Staff housing was under pressure, and outpatient, laboratory, storage and kitchen space were identified as needs.	Assess the supporting space against patient demand and include the agreed works in the district health investment plan.
Musiitwa Nazigo Seed Secondary School, Kayunga	The school improved access to secondary education and used irrigation equipment for teaching and food production, but long walking distances and pupils' engagement in petty trade affected attendance.	Maintain the practical teaching equipment and work with parents and the district education office on attendance barriers.
Kigorobyia Seed Secondary School, Hoima	Equipped classrooms, the computer room and chemistry laboratory supported teaching, and the school and ministry shared maintenance work. Staffing and study materials constrained use of the improved facilities.	Review teaching staff and materials alongside the maintenance plan.
Practices to sustain		
Lukale Health Centre III, Buvuma	Staff reported that the maternity ward allowed women to give birth locally, instead of crossing water, and with greater privacy.	Protect the service through routine care of the maternity building and equipment.
Kagumba Seed Secondary School, Kamuli	Broken furniture had been repaired during the second term. The school also held 17 UPS units needing repair or replacement.	Continue condition checks and scheduled furniture repairs before each term, and assess the 17 UPS units for repair or replacement.
Ngwedo Seed Secondary School, Buliisa	A caretaker attended monthly for repairs, and the Directorate of Industrial Training repaired furniture.	Continue the repair schedule and record the items returned to use.
Bundimulangya Health Centre III, Bundibugyo	The District Health Officer arranged maintenance support, and staff said the power house and solar installation supported continued operation. In all, 15 items were faulty, including 10 office chairs delivered without some parts.	Keep the technical referral arrangement active, include the power and solar systems in routine servicing and follow up the incomplete chairs with the supplier.

6 Conclusion

This report brings together information on 226,280 assets verified at ministries, departments and agencies, the regional blood banks, and local government health centres and seed schools. Of the 629 facilities on the programme list, 590 were verified on the ground and every facility was accounted for through verification or reconciliation. Most assets were in good condition and in use, and facility accounts show benefits including care closer to communities, safer deliveries, improved teaching spaces and equipment supporting daily services.

The findings also show why delivery alone does not secure the intended benefit. Unfinished buildings, unreliable power and water, stored equipment, repair needs and limited user skills kept some assets from being used as intended, and most verified assets were not engraved. These findings call for coordinated action at national, district and facility levels, with clear responsibility for completion, installation, custody and maintenance.

The priority is to protect services already operating and bring the remaining assets into safe, intended use. The recommendations and the priority action plan provide a basis for that follow-up. Progress should be judged by functioning facilities, equipment in use, completed repairs and accountable custody. Sustained maintenance and provision for operating needs will help preserve the programme benefits for the communities it serves.

Appendices

Appendix A Summary count schedule

The summary schedule brings the asset counts, facility coverage and reconciliation outcomes together by institution group: ministries, departments and agencies, blood banks, health centres and seed schools. Each asset is counted once. Table 35 gives the full schedule. The total column covers all 226,280 assets in this report, including four transport assets held by district offices.

Table 35: Summary count schedule by institution group

Measure	MDAs	Blood banks	Health centres	Seed schools	Total
Assets	16,668	626	63,606	145,376	226,280
Verified assets (engraving base)	15,385	605	62,071	138,671	216,736
Engraved	4,843	43	9,446	35,121	49,457
Properly engraved (UgIFT marking)	4,730	26	3,817	14,861	23,434
Not properly engraved (other marking only)	113	17	5,629	20,260	26,023
Not engraved	10,542	562	52,625	103,550	167,279
Good condition	16,648	602	60,550	138,075	215,879
In use	16,648	602	57,921	137,585	212,760
In store	0	0	2,629	490	3,119
Broken	4	6	660	2,722	3,392
Other	16	18	2,396	4,579	7,009
Not in use	20	24	5,685	7,791	13,520
MDAs and blood banks visited	15	3	-	-	18
Facilities on the programme list	-	-	371	258	629
Facilities verified	-	-	347	243	590
Facilities with works completed	-	-	320	155	475
Facilities with works not completed	-	-	27	88	115
Facilities providing services	-	-	327	193	520
Facilities not yet providing services	-	-	3	21	24
Programme-list facilities accounted for through reconciliation	-	-	24	15	39
Programme-list entries with an inconsistency	-	-	27	28	55
Does not exist or was not constructed under the programme	-	-	7	3	10
Replaced by another facility	-	-	4	0	4
Operates under another name	-	-	10	20	30
Not a UgIFT beneficiary	-	-	2	1	3
Assets relocated to another facility or held at district	-	-	2	1	3
Exists with no UgIFT assets	-	-	2	3	5
Ground-return identities outside the programme list	-	-	15	9	24

Good condition is assets in use plus assets in store. Broken assets found in store are counted under Broken. The total column includes four transport assets held by district offices, so it can exceed the sum of the four institution columns. Facility rows count local government facilities on the programme list. A dash shows that a measure does not apply to the group.

Report-category and register-class totals continue in Appendix B. Programme-list entries that operate under another name or were replaced are counted among the facilities verified under their operating or replacing name, so the reconciliation outcomes are not additive to the facilities verified. The 590 facilities verified and the 39 accounted for through reconciliation make up the 629 facilities on the programme list.

Appendix B Asset totals by category and register class

Table 36 reconciles the report categories to the programme asset count, by institution group. School furniture, held entirely by seed schools, forms the largest category, while most assets held at national level fall under other ICT equipment and other assets.

Table 36: Assets by report category and institution group

Report category	MDAs	Blood banks	Health centres	Seed schools	Total
ICT equipment	15,136	48	410	1,503	17,097
Furniture and fittings	99	68	-	-	167
Vehicles and motorcycles	76	3	-	-	79
Buildings and structures	-	1	-	-	1
Medical and laboratory equipment	-	318	-	-	318
Other MDA assets	1,357	-	-	-	1,357
Other blood bank assets	-	188	-	-	188
Clinical equipment	-	-	25,960	-	25,960
Clinical furniture	-	-	20,139	-	20,139
Maternity ward equipment	-	-	7,438	-	7,438
Health centre buildings	-	-	1,525	-	1,525
Other health centre assets	-	-	8,134	-	8,134
School buildings	-	-	-	4,341	4,341
Water facilities	-	-	-	594	594
School furniture	-	-	-	109,646	109,646
Computers and related equipment	-	-	-	10,266	10,266
Other school assets	-	-	-	19,026	19,026
District office vehicles	-	-	-	-	4
Total	16,668	626	63,606	145,376	226,280

Each asset is counted once under the category used in the findings. A dash shows that the group holds no assets in the category. The total column includes four district-office vehicles.

Table 37 preserves the register class distribution used in the government asset records alongside the report categories. Furniture and fittings, medical, laboratory and research appliances and light ICT hardware together account for 85.0% of assets.

Table 37: Assets by register class and institution group

Register class	MDAs	Blood banks	Health centres	Seed schools	Total
Buildings and structures	-	1	1,525	4,839	6,365
Furniture and fittings	99	68	15,732	109,713	125,612
ICT equipment	15,136	48	412	11,765	27,361
Medical and laboratory equipment	-	318	37,164	5,261	42,743
Other assets	1,357	188	8,768	13,792	24,105
Vehicles and motorcycles	76	3	5	6	94
Total	16,668	626	63,606	145,376	226,280

The total column includes four transport assets held by district offices. A dash shows that the group holds no assets in the class.

Appendix C Condition and use schedules

Condition follows the definition in section 2.7: good condition is assets in use plus assets in store, and broken assets are counted separately. Table 38 supplies the category figures behind the condition charts in section 4.1.2 (Figure 2 and Figure 3).

Table 38: Condition of assets by report category

Report category	In use	In store	Broken	Other	Good condition	Assets
ICT equipment	16,921	35	19	122	16,956 (99.2%)	17,097
Furniture and fittings	167	0	0	0	167 (100.0%)	167
Vehicles and motorcycles	78	0	1	0	78 (98.7%)	79
Buildings and structures	1	0	0	0	1 (100.0%)	1
Medical and laboratory equipment	301	0	6	11	301 (94.7%)	318
Other MDA assets	1,357	0	0	0	1,357 (100.0%)	1,357
Other blood bank assets	181	0	0	7	181 (96.3%)	188
Clinical equipment	22,507	1,677	220	1,556	24,184 (93.2%)	25,960
Clinical furniture	19,110	360	277	392	19,470 (96.7%)	20,139
Maternity ward equipment	6,918	303	69	148	7,221 (97.1%)	7,438
Health centre buildings	1,495	0	6	24	1,495 (98.0%)	1,525
Other health centre assets	7,530	284	83	237	7,814 (96.1%)	8,134
School buildings	4,238	3	14	86	4,241 (97.7%)	4,341
Water facilities	560	0	15	19	560 (94.3%)	594
School furniture	104,233	0	2,455	2,958	104,233 (95.1%)	109,646
Computers and related equipment	8,777	301	208	980	9,078 (88.4%)	10,266
Other school assets	18,382	156	19	469	18,538 (97.4%)	19,026
District office vehicles	4	0	0	0	4 (100.0%)	4
Total	212,760	3,119	3,392	7,009	215,879 (95.4%)	226,280

Good condition is assets in use plus assets in store. Shares on the good condition column are of the assets in the category.

Table 39 sets out the reasons stated for assets not in use, by institution group. It covers the 13,013 assets not in use with a stated reason, and each asset is counted once under its main reason. Assets that were not at the

facility at the time of the visit are shown together: the supplier had not yet delivered them, they had not yet been handed over, or they were held at the district store or elsewhere; at national level, the Ministry of Works and Transport was tracing the location of 16 assets. The table supplies the data behind Figure 22 in section 4.5.2, which discusses the reasons with the utilisation blockers.

Table 39: Stated reasons for assets not in use by institution group

Main reason	MDAs	Blood banks	Health centres	Seed schools	Total	Share of assets not in use
Broken down, damaged or obsolete	4	6	660	2,722	3,392	25.1%
In storage, no other cause given	-	-	2,412	130	2,542	18.8%
Not yet delivered, handed over or held elsewhere	16	-	953	1,553	2,522	18.7%
Functional or in good condition but not in use	-	-	133	1,214	1,347	10.0%
Awaiting power, building works, installation, trained users or staff	-	-	186	1,138	1,324	9.8%
Recorded as not functional	-	-	675	439	1,114	8.2%
Stolen, lost or missing	-	-	10	515	525	3.9%
Other stated reasons	-	18	123	9	150	1.1%
Missing accessories, parts or consumables	-	-	89	8	97	0.7%
Total	20	24	5,241	7,728	13,013	96.3%

Each asset not in use is counted once under its main reason. Shares use the assets not in use in this report. The total includes every institution group in the report.

Appendix D Recorded value and net book value schedules

The programme assets have a total recorded value of UGX 997,840,855,042, accumulated depreciation of UGX 185,538,888,776 and net book value of UGX 812,316,492,277 at 30 September 2026. These amounts support the financial handover and are presented separately from the field findings. The valuation basis is set out in section 2.8.

Table 40 gives the values by institution group behind Figure 41.

Table 40: Recorded value and net book value by institution group

Institution group	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX	Share of value
Ministries and agencies	16,668	31,822,306,095	19,372,809,078	12,449,497,017	3.3%
Blood banks	626	1,451,584,715	514,105,544	937,479,171	0.1%
Health centres	63,606	259,662,849,164	41,291,859,808	218,378,252,366	26.7%
Seed secondary schools	145,376	678,247,549,426	101,549,907,057	576,704,905,370	69.8%
District offices	4	431,135,738	279,423,826	151,711,912	0.0%
Total	226,280	971,615,425,138	163,008,105,313	808,621,845,836	100.0%

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Table 41 gives each ministry, department and agency and the regional blood banks. It supplies the data for Figure 45. Ministries, agencies and blood banks together carry a recorded value of UGX 33,273,890,810 and a net book value of UGX 13,386,976,188.

Table 41: Recorded value and net book value by ministry and blood bank

Institution	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
MoFPED	458	6,152,854,000	4,272,041,257	1,880,812,743
MoWT	88	455,932,376	326,484,882	129,447,494
MoES	10,783	14,925,128,359	10,607,476,704	4,317,651,655
MAAIF	2,045	2,332,681,629	984,457,129	1,348,224,500
MoH	264	1,216,859,097	463,977,008	752,882,089
OPM	10	53,535,300	48,181,770	5,353,530
MoWE	2,939	5,000,313,297	2,089,906,834	2,910,406,463
MoGLSD	10	46,180,000	13,660,000	32,520,000
NEMA	6	46,824,409	32,841,273	13,983,136
PPDA	5	30,153,500	13,066,516	17,086,984
OAG	20	388,773,680	111,591,545	277,182,135
MoLG	13	343,320,450	284,804,160	58,516,290
MoLHUD	27	829,749,997	124,320,000	705,429,997
Arua Regional Blood Bank	277	1,091,262,791	430,462,000	660,800,791
Hoima Regional Blood Bank	119	278,006,206	21,690,290	256,315,916
Soroti Regional Blood Bank	115	29,317,538	25,122,550	4,194,988
Uganda Blood Transfusion Services	115	52,998,180	36,830,704	16,167,476
Total: ministries and blood banks	17,294	33,273,890,810	19,886,914,622	13,386,976,188

Amounts are rounded to the nearest shilling. This schedule covers ministries, departments, agencies and blood banks.

Table 42 gives the values by report category. Building blocks carry 69.9% of the recorded value (UGX 697,270,758,260), followed by school furniture and other assets.

Table 42: Recorded value and net book value by report category

Report category	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
ICT equipment	17,097	27,562,018,783	17,788,424,597	9,773,594,186
Furniture and fittings	167	161,792,747	109,304,890	52,487,857
Vehicles and motorcycles	79	6,667,809,389	4,098,128,018	2,569,681,371
Buildings and structures	1	251,438,720	6,705,033	244,733,687
Medical and laboratory equipment	318	103,430,463	74,900,116	28,530,347
Other MDA assets	1,357	2,454,989,780	379,287,381	2,075,702,399
Other blood bank assets	188	739,065,115	251,458,549	487,606,566
Clinical equipment	25,960	32,419,253,988	12,264,441,553	20,154,812,435
Clinical furniture	20,139	16,115,597,625	6,920,036,277	9,202,824,358
Maternity ward equipment	7,438	7,419,395,159	3,270,066,317	4,149,328,842
Health centre buildings	1,525	198,198,049,954	17,166,034,514	181,032,015,440
Other health centre assets	8,134	4,634,085,063	1,024,834,897	3,609,250,166
School buildings	4,341	495,160,116,359	54,728,357,865	440,431,758,495
Water facilities	594	3,076,630,427	817,399,552	2,259,230,875
School furniture	109,646	94,322,583,307	18,004,437,908	76,325,408,399

Report category	Assets	Recorded value UGX	Depreciation UGX	Net book value UGX
Computers and related equipment	10,266	25,434,940,136	13,385,662,572	12,049,277,564
Other school assets	19,026	56,463,092,385	12,439,201,448	44,023,890,937
District office vehicles	4	431,135,738	279,423,826	151,711,912
Total	226,280	971,615,425,138	163,008,105,313	808,621,845,836

Recorded value is the cost in the verification records. Net book value is that cost less accumulated depreciation to 30 September 2026, and is not taken below zero.

Appendix E Utilisation and identification schedules

Table 43 contains the data behind the identification chart in section 4.1.3 (Figure 24). It covers the 216,736 movable assets. Buildings, structures and land are tracked through property and site records. Properly engraved assets carry the UgIFT marking.

Table 43: Engraving of verified assets by institution group

Institution group	Verified assets	Engraved	Properly engraved	Not properly engraved	Not engraved
Ministries and agencies	15,385	4,843 (31.5%)	4,730 (30.7%)	113 (0.7%)	10,542 (68.5%)
Blood banks	605	43 (7.1%)	26 (4.3%)	17 (2.8%)	562 (92.9%)
Health centres	62,071	9,446 (15.2%)	3,817 (6.1%)	5,629 (9.1%)	52,625 (84.8%)
Seed secondary schools	138,671	35,121 (25.3%)	14,861 (10.7%)	20,260 (14.6%)	103,550 (74.7%)
Total	216,736	49,457 (22.8%)	23,434 (10.8%)	26,023 (12.0%)	167,279 (77.2%)

Percentages are shares of movable assets in each group. District-office vehicles are in the total.

Table 44 gives the same measures by report category. Building blocks are identified through property and site records, so engraving does not apply to them. Where a category has fewer verified assets than assets in Table 36, the difference is accessories and consumables, which were not part of the verification, and land.

Table 44: Engraving of verified assets by report category

Report category	Verified assets	Engraved	Properly engraved	Not properly engraved	Not engraved
ICT equipment	17,090	5,019 (29.4%)	4,783 (28.0%)	236 (1.4%)	12,071 (70.6%)
Furniture and fittings	167	82 (49.1%)	82 (49.1%)	0 (0.0%)	85 (50.9%)
Vehicles and motorcycles	79	55 (69.6%)	0 (0.0%)	55 (69.6%)	24 (30.4%)
Buildings and structures	1	-	-	-	-
Medical and laboratory equipment	318	9 (2.8%)	0 (0.0%)	9 (2.8%)	309 (97.2%)
Other MDA assets	81	38 (46.9%)	24 (29.6%)	14 (17.3%)	43 (53.1%)
Other blood bank assets	168	7 (4.2%)	5 (3.0%)	2 (1.2%)	161 (95.8%)
Clinical equipment	25,960	2,815 (10.8%)	1,043 (4.0%)	1,772 (6.8%)	23,145 (89.2%)
Clinical furniture	20,139	3,934 (19.5%)	1,576 (7.8%)	2,358 (11.7%)	16,205 (80.5%)
Maternity ward equipment	7,438	1,510 (20.3%)	815 (11.0%)	695 (9.3%)	5,928 (79.7%)
Health centre buildings	1,525	-	-	-	-
Other health centre assets	8,124	1,032 (12.7%)	250 (3.1%)	782 (9.6%)	7,092 (87.3%)
School buildings	4,341	-	-	-	-
Water facilities	96	0 (0.0%)	0 (0.0%)	0 (0.0%)	96 (100.0%)

Report category	Verified assets	Engraved	Properly engraved	Not properly engraved	Not engraved
School furniture	109,646	31,656 (28.9%)	14,405 (13.1%)	17,251 (15.7%)	77,990 (71.1%)
Computers and related equipment	10,059	2,445 (24.3%)	310 (3.1%)	2,135 (21.2%)	7,614 (75.7%)
Other school assets	17,367	851 (4.9%)	141 (0.8%)	710 (4.1%)	16,516 (95.1%)
District office vehicles	4	4 (100.0%)	0 (0.0%)	4 (100.0%)	0 (0.0%)

A dash means engraving is not the means of identification for that category. Percentages are shares of movable assets.

Table 45 counts the facilities and units holding at least one asset not in use, in storage or broken down, by institution group. Assets in storage were concentrated at health centres, where 164 of the 354 facilities in the records (46.3%) held assets in storage, compared with 17 seed schools (6.7%). At national level the asset records place no assets in storage; the stored items observed at MoFPED and at the Hoima blood bank are described in sections 4.1.1 and 4.2. Assets broken down, damaged or obsolete were recorded at 183 facilities and units, among them 112 health centres (31.6%) and 68 seed schools (26.7%).

Table 45: Facilities with assets not in use, in storage or broken down by institution group

Institution group	Facilities or units	Any asset not in use	Assets in storage	Assets broken down, damaged or obsolete
MDAs	204	3 (1.5%)	0 (0.0%)	2 (1.0%)
Hospitals	75	0 (0.0%)	0 (0.0%)	0 (0.0%)
Blood banks	6	1 (16.7%)	0 (0.0%)	1 (16.7%)
Health centres	354	255 (72.0%)	164 (46.3%)	112 (31.6%)
Seed schools	255	132 (51.8%)	17 (6.7%)	68 (26.7%)
Local government offices	4	0 (0.0%)	0 (0.0%)	0 (0.0%)
Total	898	391 (43.5%)	181 (20.2%)	183 (20.4%)

Percentages are shares of the facilities or units in each group. Assets in store were concentrated at health centres. Broken assets are those recorded as damaged, broken or obsolete.

Appendix F Programme-list reconciliation

Table 46 lists every programme-list entry with an inconsistency, 55 in all, with its local government and the outcome of the reconciliation. Each entry retains its original programme-list name, and the names used by operating and receiving facilities are shown in the outcome. Section 4.3.2 summarises these outcomes.

Table 46: Programme-list entries with an inconsistency

Programme-list entry	Local government	Outcome
Does not exist or was not constructed under the programme (10)		
H070 Busia Eastern Division	Busia MC	Does not exist under the programme
S216 Kishangara seed school	Ibanda	Does not exist under the programme
S012 Central Division	Jinja City	Does not exist under the programme
H010 Butolooogo HC II	Kassanda	Does not exist under the programme
H190 Alik HCII	Lira	Does not exist under the programme
H197 Acimi HC II	Oyam	Does not exist under the programme
H195 Acokara HCII	Oyam	Does not exist under the programme
H200 Ariba HC II	Oyam	Does not exist under the programme
H205 Olok HC II	Pader	Not constructed under the programme

Programme-list entry	Local government	Outcome
S010 Eastern Division	Tororo MC	Does not exist under the programme
Replaced by another facility (4)		
H150 Ngomoromo HC II	Lamwo	Replaced by Pangira Health Centre III
H213 Loinya HC II	Maracha	Replaced by Liko Health Centre III, which is counted under its own programme-list entry
H218 Oweko HC II	Nebbi	Replaced by Pamaka Health Centre III
H354 Musandama HC II	Ntoroko	Replaced by Butungama Health Centre III
Operates under another name (30)		
S011 Igombe	Bugweri	Operates as Mpiita Seed Secondary School
S213 Nsiika T/C	Buhweju	Operates as Ndibarema Memorial Seed Secondary School
H125 Kocheke HC II	Bukedea	Operates as Kangole / Kocheke Health Centre III
S127 Bunambutye Seed School	Bulambuli	Operates as Bumufuni Seed Secondary School
H318 Mantoroba HC II	Bundibugyo	Operates as Busanga Health Centre III
S056 Kabonero	Bunyangabu	Operates as Katugunda Seed Secondary School
S057 Kyamukube Town Council	Bunyangabu	Operates as Nsuura Seed Secondary School
H065 Dabani	Busia	Operates as Buwumba Health Centre III
S065 Maddu Seed School	Gomba	Return submitted as Kyayi Seed School
S230 Buhanika	Hoima	Operates as Kidukuru Seed Secondary School
S112 Butagaya	Jinja	Operates as Buwala Seed Secondary School
S252 Kasenda Seed School	Kabarole	Operates as St Paul Nyabweya Seed Secondary School
H329 Kidubuli HC II	Kabarole	Operates as Iruhura Health Centre III
H332 Nyabuswa HC II	Kabarole	Operates as Nyambuusa Health Centre III
S048 Kagadi	Kagadi	Operates as King Solomon Seed Secondary School
S232 Kiryanga Seed School	Kagadi	Operates as St Catherine Kicucura Seed Secondary School
S049 Ruteete	Kagadi	Operates as Kitegwa Community Seed Secondary School
H292 Kikoola	Kakumiro	Operates as Mukoora Health Centre III
S066 Bufumira Seed School	Kalangala	Operates as Nekemiya Memorial Seed Secondary School
H015 Kyakatebe HC II	Kassanda	Operates as Namabaale Health Centre III
S235 Mugarama (new facilities for St Mugagga S.S)	Kibaale	Operates as St Mugagga Vocational Seed Secondary School
H027 Kagganda HC II	Lwengo	Reconciled to the Mbirizi Seed Secondary School return
S081 Mpumudde seed school	Lyantonde	Operates as Rwamabara Seed Secondary School
S084 Kiringente Seed School	Mpigi	Operates as Wamatovu Seed Secondary School
H036 Kabbo	Mubende	Operates as Nakawala Health Centre III
S086 Kimenyedde Seed School	Mukono	Operates as St Andrews Ndwadde mutwe Seed Secondary School
S122 Mwema Seed School	Namayingo	Operates as Mutumba Seed Secondary School
S103 Pallisa	Pallisa	Operates as Akadot Seed Secondary School
S167 Kadungulu Seed School	Serere	Operates as Kagwara Seed Secondary School
H054 Bussi HC II	Wakiso	Bussi is the village name for Zinga Health Centre III, which is counted under its own programme-list entry
Not a UgIFT beneficiary (3)		

Programme-list entry	Local government	Outcome
H086 Buyinda HC II	Kaliro	Not a UgIFT beneficiary
S237 Kiziranfumbi Seed School	Kikuube	Not a UgIFT beneficiary
H193 Alira HCII	Oyam	Not a UgIFT beneficiary
Assets relocated to another facility or held at district (3)		
S208 Abanga	Zombo	UgIFT assets relocated to Kango Seed Secondary School
H231 Alangi	Zombo	UgIFT assets relocated to Amwonyo Health Centre III
H233 Ther-uru HC II	Zombo	UgIFT assets relocated to Atyak Health Centre III
Exists with no UgIFT assets (5)		
S214 Bumbaire Seed School	Bushenyi	Exists with no UgIFT assets
S215 Kyamuhunga	Bushenyi	Exists with no UgIFT assets
H149 Pandwong HC II	Kitgum MC	Exists with no UgIFT assets
S221 Kashenshero	Mitooma	Exists with no UgIFT assets
H282 Rwamujojo HC II	Sheema MC	Exists with no UgIFT assets

Entries are grouped by outcome; the number of entries in each group is shown in brackets.

Table 47 lists the 24 ground-return identities: facility names found in the field returns that are not on the programme list. They are counted separately from the 629 programme-list facilities. Three of them, marked with an asterisk, are confirmed UgIFT beneficiaries that were not on the programme list. Linked receiving facilities and the separately allocated blood banks remain in their own reconciliation accounts.

Table 47: Ground-return identities outside the programme list

Name	Local government
Arocha Health Centre III	Apac
Kabushaho Seed Secondary School	Bushenyi
Sofia Health Centre III	Busia MC
Buvuma Health Centre III	Buvuma
Bukuuku Community Seed Secondary School *	Fort Portal City
Silumira Health Centre III *	Kakumiro
Bushogyi Seed Secondary School	Kanungu
Lokori Seed Secondary School	Karenga
Rukoki General Hospital *	Kasese
Onywako Health Centre III	Lira
Lwengenyi Health Centre III	Lwengo
Odupiri Health Centre III	Maracha
Kitojo Seed Secondary School	Mitooma
Rupa Seed Secondary School	Moroto
Kibuzigye Seed Secondary School	Rubanda
Bikurungu Seed Secondary School	Rukungiri
Migina Health Centre III	Sheema
Simu Pondo Health Centre III	Sironko
Buloba Health Centre III	Wakiso

Name	Local government
Ekaligo Health Centre III	Yumbe
Liko Health Centre III	Yumbe
Lobe Health Centre III	Yumbe
Nyori Health Centre III	Yumbe
Amei Seed Secondary School	Zombo

* Confirmed UgIFT beneficiary that was not on the programme list.

Table 48 lists the 89 verified facilities where works were outstanding, as confirmed in the field returns or the building records, or where services had not yet started. It supports section 4.3.1. Works were outstanding at 86 facilities, 50 of which were already providing services. The 24 facilities not yet providing services include two seed schools whose works were complete and Aleka Seed Secondary School in Oyam, recorded as ongoing on the programme list. The other 28 facilities counted as not completed in section 4.3.1 are recorded as ongoing on the programme list.

Table 48: Verified facilities with works outstanding or not yet providing services

Facility	Local government	Type	Position at the visit
Omot Health Centre III	Agago	Health centre	Main works outstanding; providing services
Bukibologoto Health Centre III	Bulambuli	Health centre	Main works outstanding; not yet providing services
Adagmon Health Centre III	Dokolo	Health centre	Main works outstanding; providing services
Mamba Health Centre III	Gomba	Health centre	Ancillary works outstanding; providing services
Ngomamene Health Centre III	Gomba	Health centre	Ancillary works outstanding; providing services
Maregamo Health Centre III	Kisoro	Health centre	Works outstanding
Benet Health Centre III	Kween	Health centre	Main works outstanding; providing services
Kaptum Health Centre III	Kween	Health centre	Main works outstanding; not yet providing services
Moyok Health Centre III	Kween	Health centre	Awaiting handover by the contractor; providing services
Mutungo Health Centre III	Makindye-Ssabagabo MC	Health centre	Ancillary works outstanding; providing services
Lama Health Centre III	Moyo	Health centre	Main works outstanding; providing services
Matugga Health Centre III	Nansana MC	Health centre	Ancillary works outstanding; providing services
Abwoch Health Centre III	Omoro	Health centre	Main works outstanding; providing services
Tekulu Health Centre III	Omoro	Health centre	Main works outstanding; providing services
Kyamwinula Health Centre III	Tororo MC	Health centre	Main works outstanding; providing services
Amanyiri Health Centre III	Yumbe	Health centre	Main works outstanding; not yet providing services
Alerek Seed Secondary School	Abim	Seed school	Awaiting handover by the contractor; providing services
Kotomor Seed Secondary School	Agago	Seed school	Main works outstanding; not yet providing services
Lamiyo Seed Secondary School	Agago	Seed school	Main works outstanding
Omiya Pacwa Seed Secondary School	Agago	Seed school	Main works outstanding; not yet providing services
Akwon Seed Secondary School	Amolatar	Seed school	Works outstanding; not yet providing services
Looro Seed Secondary School	Amudat	Seed school	Main works outstanding; providing services

Facility	Local government	Type	Position at the visit
Asamuk Seed Secondary School	Amuria	Seed school	Works outstanding
Amuru Town Seed Secondary School	Amuru	Seed school	Awaiting handover by the contractor; not yet providing services
St Peters Aroi Seed Secondary School	Arua	Seed school	Main works outstanding; providing services
Bushiribo Seed Secondary School	Bududa	Seed school	Main works outstanding; not yet providing services
Mpiita Seed Secondary School	Bugweri	Seed school	Main works outstanding; providing services
Senendet Seed Secondary School	Bukwo	Seed school	Main works outstanding; not yet providing services
Kihungya Seed Secondary School	Buliisa	Seed school	Main works outstanding; providing services
Burondo Seed Secondary School	Bundibugyo	Seed school	Main works outstanding; not yet providing services
Kabango Seed Secondary School	Bundibugyo	Seed school	Main works outstanding; providing services
Kisuba Seed Secondary School	Bundibugyo	Seed school	Works outstanding; providing services
Katugunda Seed Secondary School	Bunyangabu	Seed school	Works outstanding; providing services
Nsuura Seed Secondary School	Bunyangabu	Seed school	Main works outstanding; providing services
Muhula Seed Secondary School	Butaleja	Seed school	Main works outstanding; not yet providing services
St Luke Kibibi Seed Secondary School	Butambala	Seed school	Works complete, awaiting commissioning; not yet providing services
Patiko Seed Secondary School	Gulu	Seed school	Works outstanding; providing services
Kidukuru Seed Secondary School	Hoima	Seed school	Awaiting handover by the contractor; providing services
Sidok Seed Secondary School	Kaabong	Seed school	Main works outstanding; not yet providing services
Aperikira Seed Secondary School	Kaberamaido	Seed school	Ancillary works outstanding; providing services
Burora Seed Secondary School	Kagadi	Seed school	Awaiting handover by the contractor
King Solomon Seed Secondary School	Kagadi	Seed school	Main works outstanding; providing services
Kitegwa Community Seed Secondary School	Kagadi	Seed school	Works outstanding; providing services
St Catherine Kicucura Seed Secondary School	Kagadi	Seed school	Works outstanding; providing services
Kapedo Seed Secondary School	Karenga	Seed school	Main works outstanding
Bwesumbu Seed Secondary School	Kasese	Seed school	Main works outstanding; providing services
Lwamata Town Council Seed Secondary School	Kiboga	Seed school	Works outstanding; providing services
Kyangwali Seed Secondary School	Kikuube	Seed school	Awaiting handover by the contractor; providing services
Lake Mburo Seed Secondary School	Kiruhura	Seed school	Works outstanding
Nyakasharara Seed Secondary School	Kiruhura	Seed school	Ancillary works outstanding
Kigumba Town Seed Secondary School	Kiryandongo	Seed school	Main works outstanding; providing services
Kanara Seed Secondary School	Kitagwenda	Seed school	Awaiting handover by the contractor; providing services
Rengen Seed Secondary School	Kotido	Seed school	Main works outstanding; not yet providing services
Kumi Seed Secondary School	Kumi	Seed school	Ancillary works outstanding; providing services
Kaptum Seed Secondary School	Kween	Seed school	Main works outstanding; not yet providing services

Facility	Local government	Type	Position at the visit
Kitawoi Seed Secondary School	Kween	Seed school	Main works outstanding; providing services
Moyok Seed Secondary School	Kween	Seed school	Main works outstanding; not yet providing services
Ntwetwe Seed Secondary School	Kyankwanzi	Seed school	Works outstanding; providing services
Rwentuha Seed Secondary School	Kyegegwa	Seed school	Ancillary works outstanding; providing services
Kigaraale Seed Secondary School	Kyenjojo	Seed school	Works outstanding; providing services
Kyarusizi Seed Secondary School	Kyenjojo	Seed school	Ancillary works outstanding
Kyembogo Seed Secondary School	Kyenjojo	Seed school	Ancillary works outstanding
Padibe Seed Secondary School	Lamwo	Seed school	Main works outstanding; not yet providing services
Butta Seed Secondary School	Manafwa	Seed school	Main works outstanding; not yet providing services
Khabutoola Seed Secondary School	Manafwa	Seed school	Main works outstanding; providing services
Sibanga Seed Secondary School	Manafwa	Seed school	Awaiting handover by the contractor; providing services
Sisuni Seed Secondary School	Manafwa	Seed school	Main works outstanding; providing services
Rupa Seed Secondary School	Moroto	Seed school	Ancillary works outstanding; providing services
Dufile Seed Secondary School	Moyo	Seed school	Main works outstanding
Kigando Seed Secondary School	Mubende	Seed school	Ancillary works outstanding; providing services
Moruita Seed Secondary School	Nakapiripirit	Seed school	Main works outstanding; not yet providing services
Nakapiripirit Seed Secondary School	Nakapiripirit	Seed school	Works outstanding; providing services
Mukuto Seed Secondary School	Namisindwa	Seed school	Works outstanding; providing services
Iriiri Seed Secondary School	Napak	Seed school	Awaiting handover by the contractor; not yet providing services
Lopei Seed Secondary School	Napak	Seed school	Works complete and handed over, opening the following year; not yet providing services
Atego Seed Secondary School	Nebbi	Seed school	Main works outstanding; providing services
Mamba Seed Secondary School	Nebbi	Seed school	Main works outstanding; providing services
Ndhew Seed Secondary School	Nebbi	Seed school	Main works outstanding
Ngora Seed Secondary School	Ngora	Seed school	Ancillary works outstanding
Butungama Seed Secondary School	Ntoroko	Seed school	Main works outstanding; providing services
Kibuuku Seed Secondary School	Ntoroko	Seed school	Ancillary works outstanding
Got Apwoyo Seed Secondary School	Nwoya	Seed school	Main works outstanding; not yet providing services
Okum Seed Secondary School	Otuke	Seed school	Main works outstanding; not yet providing services
Aleka Seed Secondary School	Oyam	Seed school	Works recorded as ongoing; not yet providing services
Olok Seed Secondary School	Pallisa	Seed school	Ancillary works outstanding; providing services
Ryakasinga Seed Secondary School	Sheema	Seed school	Main works outstanding
Kamuda Seed Secondary School	Soroti	Seed school	Works outstanding
Atyak Seed Secondary School	Zombo	Seed school	Works outstanding; providing services
Kango Seed Secondary School	Zombo	Seed school	Ancillary works outstanding; providing services

Main works are classroom, laboratory, library, ICT, administration, ward, maternity or outpatient blocks, or the whole facility; ancillary works are staff houses, latrines, toilets, kitchens, placenta pits or incinerators.

Appendix G Asset information for institutional handover

The information prepared for institutional handover covers 226,280 assets: 16,668 at ministries and agencies, 626 at blood banks, and 208,986 at health centres, seed schools and district offices. Table 49 summarises the information held. It includes asset descriptions, locations, condition, use and custody details, together with available valuation and depreciation information.

Table 49: Asset information prepared for handover

Asset scope	Assets	Information held	Handover purpose
Whole programme	226,280	Identification, location, condition, use, custody and available valuation details.	Institutional accountability, maintenance planning and financial reporting.

The asset count is the population reported here.

Asset identifiers, classifications, identification marks, use and custody details, and available cost and depreciation values support institutional accountability, maintenance planning and financial reporting.

Appendix H Evidence supporting the findings

The findings draw on physical inspection, discussions with facility managers and technical officers, photographs, asset inventories and supervisor reconciliation. Facility examples identify the location, the issue requiring action and its effect on services. Photographs document the condition of selected facilities and assets at the time of the visits.

Service benefits described by facility managers are presented as their experience of the programme. The action plan sets out the recommended next steps and proposed responsibilities.

Appendix I Photographic record of verified assets

The photographs in this appendix record assets verified at health centres and seed schools during the local government fieldwork, and show their condition at the time of the visits. Photographs of works in progress, engraving, storage, damage and services appear with the related findings in chapter 4.

Health centres

Figures 99 to 118 show clinical, maternity and laboratory equipment and furniture at health centres, including an infant radiant warmer, oxygen concentrators and cylinders, delivery beds, autoclaves, a binocular microscope, weighing scales and kangaroo care chairs.



Figure 99: Infant radiant warmer at a health centre, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 100: Oxygen cylinders marked KIBIRI HCIII at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 101: Wooden waiting bench at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 102: Delivery bed and clinical furniture at a health centre, Kabarole District (Tooro)



Figure 103: Oxygen concentrator at Kalemungole HC III, Moroto District (Karamoja)



Figure 104: Suction apparatus at Kalemungole HC III, Moroto District (Karamoja)



Figure 105: Oxygen concentrator at Kamoru HC III, Kotido District (Karamoja)



Figure 106: Instrument trolley with delivery instruments at Kamoru HC III, Kotido District (Karamoja)



Figure 107: Medical-waste bins and ward beds at Butiaba HC III, Buliisa District (Bunyoro)



Figure 108: Laboratory centrifuge at Butiaba HC III, Buliisa District (Bunyoro)



Figure 109: Blood pressure apparatus on a mobile stand at Butiaba HC III, Buliisa District (Bunyoro)



Figure 110: Office chairs at Butiaba HC III, Buliisa District (Bunyoro)



Figure 111: Kangaroo care chair at Kyabasara HC III, Kagadi District (Bunyoro)



Figure 112: Infant weighing scale at Buwembe HC III, Busia District (Bukedi)



Figure 113: Autoclave above a gas cylinder at Buwembe HC III, Busia District (Bukedi)



Figure 114: Autoclave at Atar HC III, Kween District (Sebei)



Figure 115: Kangaroo care chair at Atar HC III, Kween District (Sebei)



Figure 116: Binocular microscope on a trolley at Namusita HC III, Budaka District (Bukedi)



Figure 117: Infant weighing scales at Namusita HC III, Budaka District (Bukedi)



Figure 118: Delivery bed with side rails at Kabweri HC III, Kibuku District (Bukedi)

Figures 119 to 128 show health centre buildings and the power, water and sanitation installations that serve them, including solar panels and batteries, a power house, latrine and sanitation blocks, a waste disposal structure and water tanks.



Figure 119: Health centre building, Nwoya District (Acholi)



Figure 120: Solar panels at Kalemungole HC III, Moroto District (Karamoja)



Figure 121: Patient toilet block at Kalemungole HC III, Moroto District (Karamoja)



Figure 122: Power house at Kyabasara HC III, Kagadi District (Bunyoro)



Figure 123: Latrine block and paved access at Kyabasara HC III, Kagadi District (Bunyoro)



Figure 124: Solar batteries at Bunangaka HC III, Bulambuli District (Bugisu)



Figure 125: Solar batteries and control equipment at Atar HC III, Kween District (Sebei)



Figure 126: Sanitation block with external handwashing basins at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 127: Waste disposal structure at Kibiri HC III, Makindye-Ssabagabo Municipal Council (Buganda)



Figure 128: Water tanks on a steel tower at Kabweri HC III, Kibuku District (Bukedi)

Seed schools

Figures 129 to 146 show furniture and teaching equipment at seed schools, including laboratory benches and stools, laboratory glassware, anatomical teaching models, classroom desks, library shelving and computer equipment.

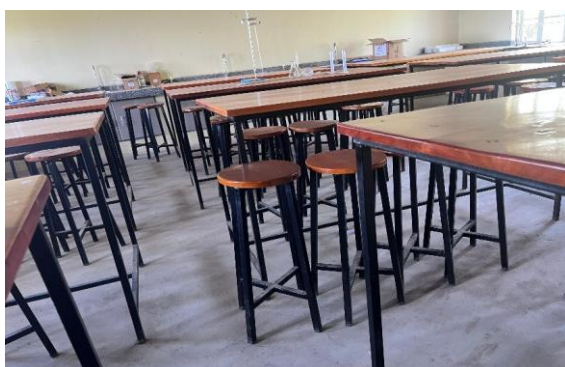


Figure 129: Science laboratory tables and stools at a seed secondary school, Kalangala District (Buganda)



Figure 130: Library shelves and reading tables at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)

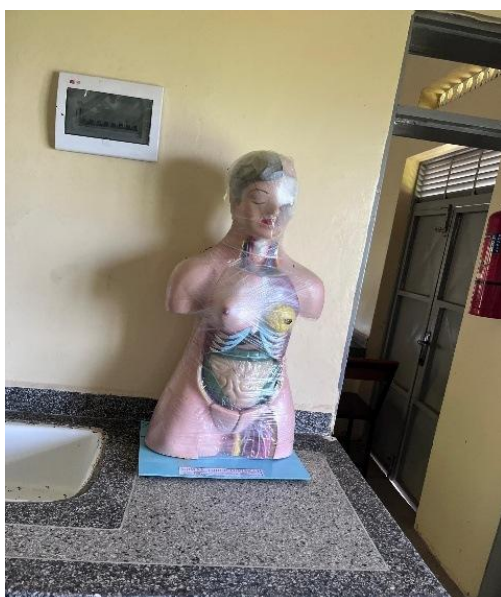


Figure 131: Anatomical teaching model at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)



Figure 132: Laboratory glassware and equipment at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)



Figure 133: Desktop computers and classroom furniture at a seed secondary school, Busia District (Bukedi)

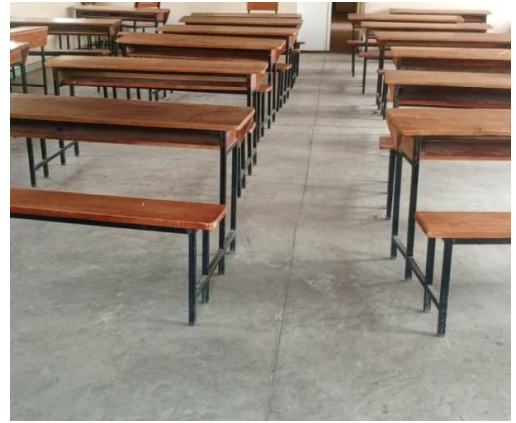


Figure 134: Classroom desks at a seed secondary school, Ntoroko District (Tooro)



Figure 135: Classroom desks at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 136: Laboratory benches and sinks at Bweema Seed Secondary School, Buvuma District (Buganda)



Figure 137: Classroom desks at Bweema Seed Secondary School, Buvuma District (Buganda)



Figure 138: Laboratory supplies and an anatomical teaching model at Rupa Seed School, Moroto District (Karamoja)



Figure 139: Computer equipment in the school ICT room at Kabeywa Seed Secondary School, Kapchorwa District (Sebei)



Figure 140: Library shelving and tables at Kabeywa Seed Secondary School, Kapchorwa District (Sebei)



Figure 141: Office desk and other furniture at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)



Figure 142: Laboratory tables at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)



Figure 143: Library shelving at Lwamata Town Council Seed Secondary School, Kiboga District (Buganda)



Figure 144: Anatomical skeleton teaching model at Kamonkoli Seed Secondary School, Budaka District (Bukedi)



Figure 145: Laboratory benches, stools and sinks at Nansanga Seed Secondary School, Budaka District (Bukedi)



Figure 146: Library shelving with books at Nansanga Seed Secondary School, Budaka District (Bukedi)

Figures 147 to 162 show seed school buildings and the water, sanitation and gas installations that serve them, including school blocks, a science laboratory, a computer and library block, water storage tanks, a borehole, a sanitation block and gas cylinders with their pipework.



Figure 147: Buildings at a seed secondary school, Nwoya District (Acholi)



Figure 148: School blocks at Gyagenda Memorial Seed Secondary School, Kalangala District (Buganda)



Figure 149: School buildings and courtyard at a seed secondary school, Buvuma District (Buganda)



Figure 150: Raised water storage tank at a seed secondary school, Buvuma District (Buganda)



Figure 151: Sanitation block at Bweema Seed Secondary School, Buvuma District (Buganda)



Figure 152: Water tank and enclosed service structures at Bweema Seed Secondary School, Buvuma District (Buganda)



Figure 153: Borehole apron and pipework at Katikekire Seed School, Moroto District (Karamoja)



Figure 154: Section of the science laboratory exterior at Iriiri Seed Secondary School, Napak District (Karamoja)



Figure 155: Water storage tanks at Lopei Seed Secondary School, Napak District (Karamoja)



Figure 156: Computer and library block at Lopei Seed Secondary School, Napak District (Karamoja)



Figure 157: Water tanks on a rendered plinth and steel tower at Alerek Seed Secondary School, Abim District (Karamoja)



Figure 158: Water storage tanks at Rengen Seed School, Kotido District (Karamoja)



Figure 159: Gas cylinders and pipework at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 160: Water tank on a masonry support at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 161: Elevated water tank on a steel tower at King Solomon Seed Secondary School, Kagadi District (Bunyoro)



Figure 162: Rainwater tank beside a staff house at Rupa Seed School, Moroto District (Karamoja)